

HK-LD-8020 Input/Output Module



I/O Module is a very important part of the fire alarm system, which has passive contact output, normally open or normally closed input, can be used to control the electromagnetic valve, exhaust valve and other equipment, and feed the action signal of the equipment to the fire alarm control panel.

- Nonpolarity two bus, convenient for construction wiring, avoiding equipment failures caused by incorrect connections.
- Break detection and short circuit protection for external lines.


▪ Specification

Model		HK-LD-8020
General	Weight	101g
	Main Power Supply	DC 24 V (DC 18 V~DC 28 V)
	Indicator	2, Red
	Coding Parameter	1~250
	Wiring	Two-wire, polarity-free
	Operating current	≤9mA
	Product Dimension	L 86 mm * W 86 mm * H 41 mm (with base)
Bus Parameters	Wiring requirements	RVS 2*1.5m ² Flame Retardant Wire, Max distance: 1000 m

▪ Available Model

I/O Module-HK-LD-8020

▪ Dimension

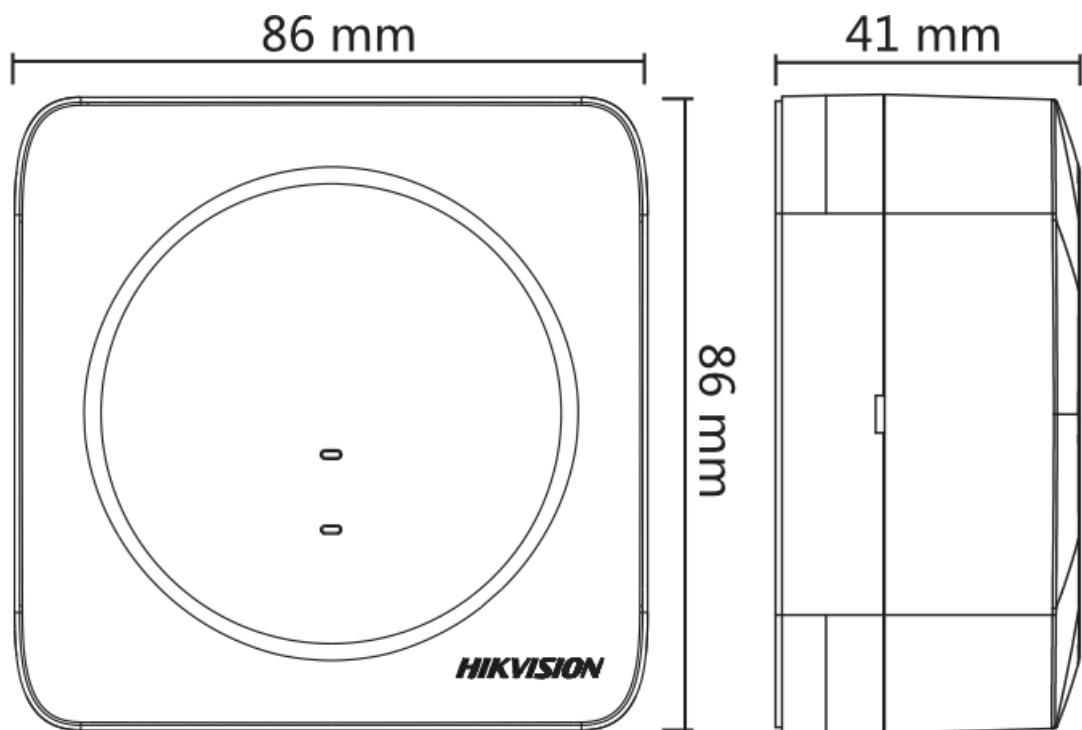

Headquarters

Address: Room 311, Unit B, Building 2, No.399,

Danfeng Road, Binjiang District, Hangzhou City,

Zhejiang Province, China

Tel: 0086 400-800-5998

www.hikvision.com

Safer Place Better Life