

HK-LD-8023 Addressable Input Module



Input module is a very important part of the fire alarm system, which is used to receive feedback signals from controlled equipment or components.

- Non-polarity two bus, convenient for construction wiring, avoiding equipment failures caused by incorrect connections.
- User-friendly interactive design with clear indicator lights on the front shell.


▪ Specification

Model		HK-LD-8023
General	Weight	101g
	Main Power Supply	DC 24 V (DC 18 V~DC 28 V)
	Indicator	1, Red
	Coding Parameter	1~250
	Wiring	Two-wire, polarity-free
	Monitor current	≤200 uA
	Operating current	≤300 uA
	Product Dimension	L 86 mm * W 86 mm * H 41 mm (with base)
Bus Parameters	Wiring requirements	RVS 2*1.5m ² Flame Retardant Wire, Max distance: 1000 m

▪ Available Model

Input Module-HK-LD-8023

▪ Dimension

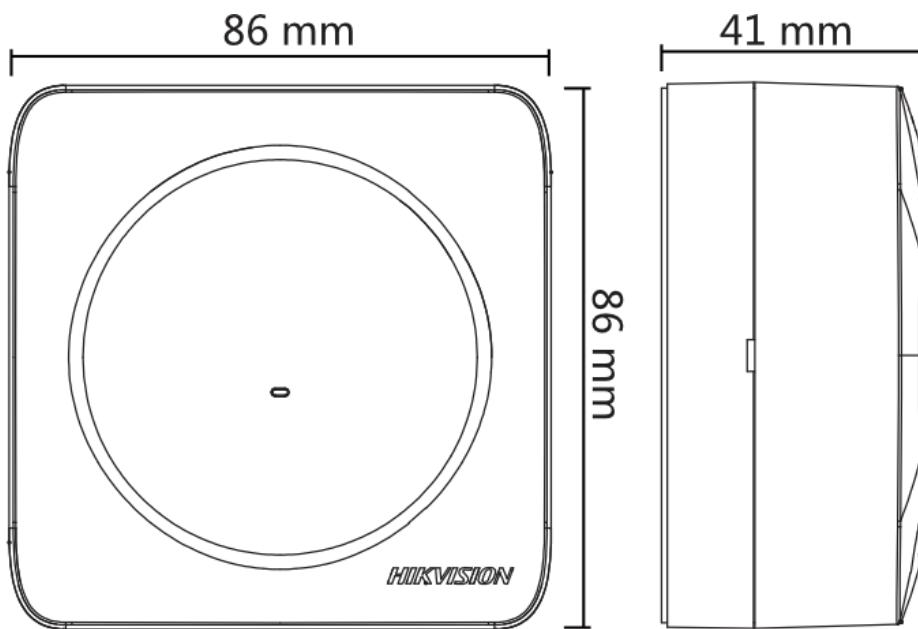

Headquarters

Address: Room 311, Unit B, Building 2, No.399,

Danfeng Road, Binjiang District, Hangzhou City,

Zhejiang Province, China

Tel: 0086 400-800-5998

www.hikvision.com

Safer Place Better Life