

RX300-3-3910SS-1**Static Pedestrian Signal Light**

- Traffic signal light adopts four-element LED as the light-emitting component. It is equipped with red and green light-emitting units powered independently.
- The housing material adopts PC and ABS. The light housing surface adopts matte craft.

www.hikvision.com

▪ Specification

General

Working Voltage	176 to 265 VAC, 50 ± 3 Hz
Rated Power	≤ 20 W
Working Temperature	-40 °C to 80 °C (-40 °F to 176 °F)
Working Humidity	10% to 95%
Storage Environment	0 °C to 50 °C (32 °F to 122 °F), 40% RH to 60% RH
Insulation Resistance	≥ 500 MΩ
Dielectric Strength	≥ 1500 V
Transformer	24 VAC
Access Interface	220 VAC, live line (red, yellow, and green), zero line
Single-Tube Current	≤ 20 mA
Protection	IP53
Weight	≤ 14 kg (30.9 lb.)

Appearance and Material

Shield Diameter	Φ 300 mm (Φ 11.8")
Shield Material	PC
Housing Material	PC + ABS (plastic), surface treatment, black
Traffic Signal Light Pattern	Red pedestrian pattern + static green pedestrian pattern + 2-digit countdown timer
Shade Dimension	770 mm × 250 mm (30.3" × 9.8")
Shade Material	Galvanized steel sheet

LED

LED Diameter	Φ 5 mm (Φ 0.2")
Number of LED	Red light: 80, green light: 90, red countdown timer: 140, green countdown timer: 168
LED Wave Length	Red: 4500 mcd to 7200 mcd/625 ± 5 nm Green: 6000 mcd to 10800 mcd/506 ± 3 nm
Central Brightness	150 cd to 400 cd
LED Visual Angle	≥ 30°
LED Visual Distance	≥ 400 m (1312")
LED Service Life	≥ 100,000 h

Timer


Timer Mode	Learning/trigger/RS-485 communication
------------	---------------------------------------

▪ Available Model

RX300-3-3910SS-1

▪Dimension

mm[inch]

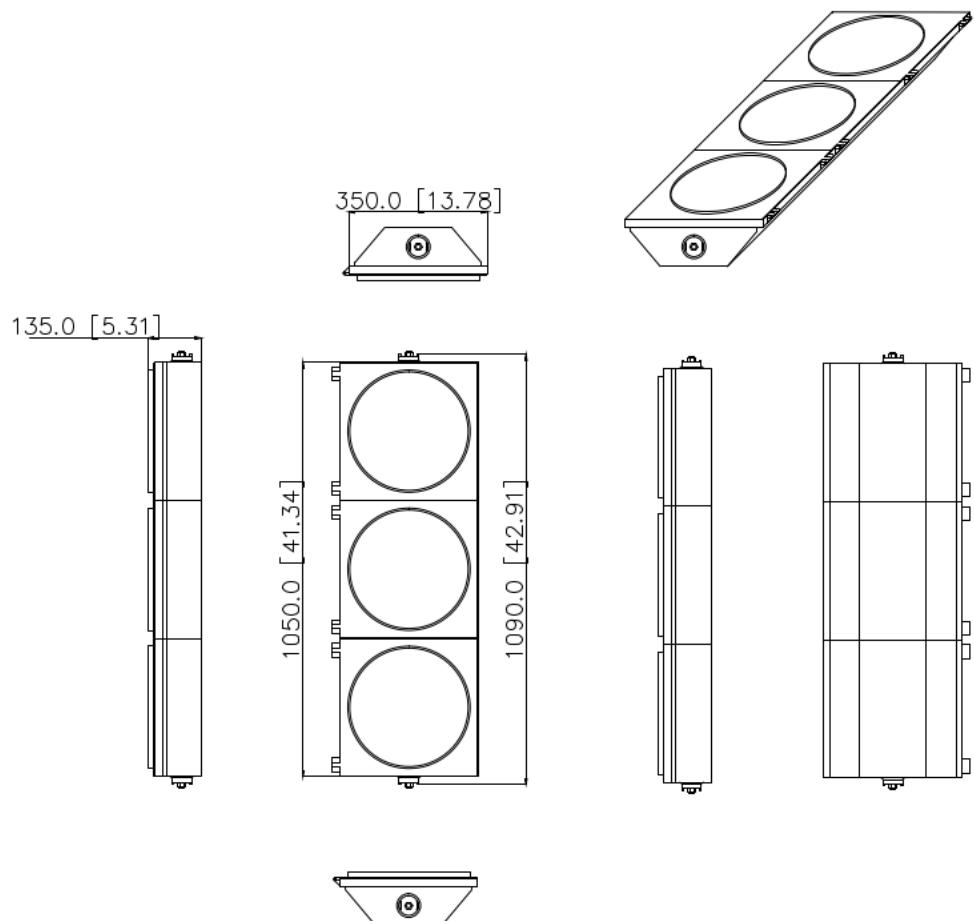



Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
salru@hikvision.com

Hikvision Korea
T +82-[0]31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com