

## iDS-TCS802-FS 8 MP Radar-Video Fusion Incident Detection Camera



- High quality imaging with 8 MP resolution (1/1.8" CMOS) & 80 GHz MMW radar
- H.264/H.265 High Profile encoding, maximum Full HD 3840 × 2160 @ 25 fps real-time image output
- Color: 0.01 Lux @ (F1.2, AGC ON) B/W: 0.001 Lux @ (F1.2, AGC ON)
- 3D DNR technology delivers clean and sharp images
- Supports multi-target vehicle trajectory detection and target visualization
- Supports multiple incidents detection: Stopped Vehicle, Driving on the Lane Line, Lane Change, Continuous Lane Change, Wrong-Way Driving, Speeding, Congestion, Construction, Roadblock, Pedestrian, Fallen Object, Traffic Accident, Not Slowing Down at Crosswalk, Continuous Lane Change.
- Supports multiple traffic parameters collection: Traffic Flow, Average Speed, Traffic State, Lane Queue Length, Time Interval of Vehicle Head, Headway Distance, Lane Space Occupancy, Lane Time Occupancy
- Supports two application scenarios: urban and intersection

## ▪ Specification

| Camera                      |  |
|-----------------------------|--|
| Image Sensor                | 1/1.8" Progressive Scan CMOS   |
| Max. Resolution             | 3840 × 2160  |
| Min. Illumination           | Color: 0.01 Lux @ (F1.2, AGC ON)<br>B/W: 0.001 Lux @ (F1.2, AGC ON)  |
| Shutter Time                | 118 to 40000 µs  |
| Day & Night                 | IR cut filter  |
| Lens                        |  |
| Lens Type                   | Fixed focal lens, 12 mm  |
| Focal Length & FOV          | 12 mm, horizontal FOV 37°, vertical FOV 21°, diagonal FOV 43°  |
| Iris Type                   | Fixed iris   |
| Aperture                    | F1.6-C   |
| Illuminator                 |  |
| External Supplement Light   | Continuous light   |
| Radar                       |  |
| Working Frequency           | 79 to 81 GHz   |
| Modulation Waveform         | FMCW   |
| Detection Distance          | 40 to 200 m  |
| Speed Measuring Range       | -250 to 250 km/h   |
| Speed Measuring Accuracy    | ± 2 km/h   |
| Trigger Mode                | Approaching direction, Leaving direction, Bidirection  |
| Antenna Beam Width          | 35° × 16°  |
| Coverage Lanes              | Up to 4 lane(s)  |
| Sweep Bandwidth             | 169 MHz @ Narrow Beam, 500 MHz @ Wide Beam   |
| Video                       |  |
| Main Stream                 | 50 Hz: 25 fps (3840 × 2160, 3392 × 2008, 3072 × 1728, 2688 × 1520, 1920 × 1200, 1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (3840 × 2160, 3392 × 2008, 3072 × 3072, 2688 × 1520, 1920 × 1200, 1920 × 1080, 1280 × 720) |
| Sub-Stream                  | 50 Hz: 25 fps (3072 × 1728, 2688 × 1520, 1920 × 1200, 1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (3072 × 3072, 2688 × 1520, 1920 × 1200, 1920 × 1080, 1280 × 720)   |
| Third Stream                | 50 Hz: 25 fps (1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 720)   |
| Video Compression           | Main stream: H.265/H.264/MJPEG,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264/MJPEG   |
| Video Bit Rate              | 32 Kbps to 16 Mbps   |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile   |
| H.265 Type                  | Main Profile   |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding   |
| Network                     |  |
| Protocols                   | TCP/IP, HTTP, HTTPS, FTP, DNS, RTP, RTSP, RTCP, NTP, IPv4/IPv6, UDP, DDNS, ISUP, SNMP, DHCP, 802.1X, QoS   |
| Simultaneous Live View      | Up to 6 channels   |
| API                         | ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP, OTAP  |

|   |  |
|---|--|
| User/Host                                 | Up to 32 users,3 user levels: administrator, operator, and user  |
| Security                                  | Password protection,Complicated password,HTTPS encryption,802.1X authentication (EAP-PEAP, EAP-LEAP, EAP-MD5),Basic and digest authentication for HTTP/HTTPS,WSSE and digest authentication for ONVIF,RTP/RTSP over HTTPS,Control timeout settings,Security audit log,Host authentication (MAC address)  |
| Network Storage                           | Micro SD/TF card (512 GB),CVR,NVR,ANR  |
| Client                                    | Hik-Central Master,Hik-Central Pro,HikCentral Master Lite  |
| Web Browser                               | Chrome V61+, Edge  |
| <b>Image</b>                              |  |
| Image Settings                            | Saturation,Brightness,Contrast,Sharpness,Gain,White balance,AGC,Adjustable by client software or web browser.  |
| Day/Night Switch                          | Auto,Schedule,Manual   |
| Wide Dynamic Range (WDR)                  | 140 dB   |
| Image Enhancement                         | BLC,HLC,3D DNR   |
| <b>Interface</b>                          |  |
| Ethernet Interface                        | 2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet port(s)  |
| On-Board Storage                          | Built-in memory card slot, supporting microSD/SDHC/SDXC card, up to 512 GB   |
| RS-485                                    | 1 RS-485   |
| RS-232                                    | 1 RS-232   |
| <b>Event</b>                              |  |
| Basic Event                               | HDD error,IP address conflict,Network disconnected   |
| <b>Road Traffic and Vehicle Detection</b> |  |
| Coverage                                  | Up to 4 lane(s)  |
| Trigger Mode                              | Video trigger  |
| Smart Function                            | Supports multiple incidents detection: Stopped Vehicle, Driving on the Lane Line, Lane Change, Continuous Lane Change, Wrong-Way Driving, Speeding, Congestion, Construction, Roadblock, Pedestrian, Fallen Object, Traffic Accident, Not Slowing Down at Crosswalk, Continuous Lane Change.,<br>Supports multiple traffic parameters collection: Traffic Flow, Average Speed, Traffic State, Lane Queue Length, Time Interval of Vehicle Head, Headway Distance, Lane Space Occupancy, Lane Time Occupancy. |
| <b>General</b>                            |  |
| Operating System                          | linux  |
| Power                                     | DC 36 V ± 20%, 0.8 A, max. 30 W, two-core terminal block   |
| Material                                  | Aluminum alloy   |
| Dimension                                 | 226 mm × 206.4 mm × 375.3 mm (8.9" × 8.1" × 14.8") (L × W × H)   |
| Package Dimension                         | 290 mm × 276 mm × 460 mm (11.42" × 10.87" × 18.11") (L × W × H)  |
| Weight                                    | Approx. 3 kg (6.6 lb.)   |
| With Package Weight                       | Approx. 4.69 kg (10.34 lb.)  |
| Operating Condition                       | -30 °C to 70 °C (22 °F to 158 °F). Humidity 95% or less (non-condensing)   |
| Storage Condition                         | -30 °C to 70 °C (-22 °F to 158 °F). Humidity 95% or less (Non-condensing)  |
| General Function                          | Heartbeat,Password protection,Three streams,One-key reset  |
| Language                                  | 8 languages: English, Thai, Croatian, Korean, Russian, Traditional Chinese, Ukrainian, Spanish   |

| Approval    |   |
|-------------|---|
| RF          | CE-RED:EN 301489-1 V2.2.3, EN 301489-3 V2.1.1, EN 301489-17 V3.2.4 , EN 301489-52 V1.2.1 , EN 302264-1 V1.1.1, EN 302 264-2 V1.1.1, EN IEC 62311:2020 |
| EMC         | CE-EMC: EN 55032: 2015/A11:2020+A1:2020, EN IEC61000-3-2: 2019/A1:2021, EN 61000-3-3: 2013+A1:2019/A2:2021, EN 50130-4: 2011 +A1: 2014                |
| Safety      | CE-LVD: EN 61010-1: 2010+A1: 2019,<br>CB: IEC 61010-1: 2010; IEC 61010-1: 2010/AMD1: 2016   |
| Environment | CE-RoHS: 2011/65/EU,WEEE: 2012/19/EU,Reach: Regulation (EC) No 1907/2006  |
| Protection  | IK10: IEC 62262:2002,IP67: IEC 60529-2013   |

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

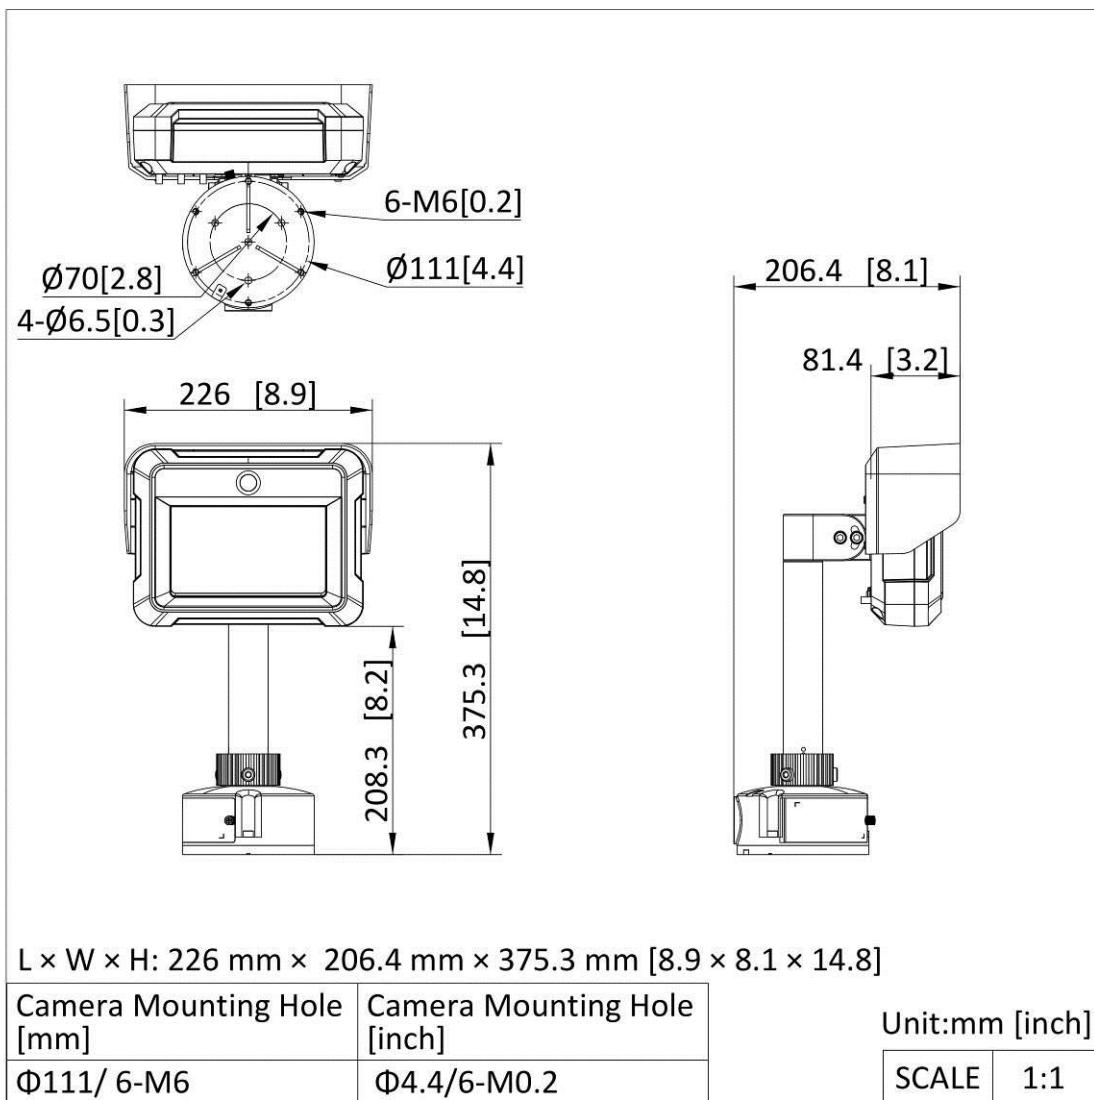
This model has NO SPECIFIC PROTECTION.

| Level                  | Description  |
|------------------------|--|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.   |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.  |

## ▪ Available Model



iDS-TCS802-FS/200m/12

iDS-TCS802-FS/Y/200m/12

**▪ Dimension**

▪ **Accessory**

▪ **Optional**

| DS-1701ZJ/BJH<br>Hoop & Bracket   | DS-1275ZJ-BJH/600mm<br>Hoop & Bracket   | DS-1278ZJ-BJH<br>Hoop & Bracket  |
|---|---|--|
|  |  |  |
|  |  |  |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**