

**DS-D4009BW-2FC/A/G**  
**Cabinet 600 \* 337,5mm**

600 × 337.5 Indoor LED


- The display and control system is wholly self-developed, which is stable, safety and controllable.
- Highly integrated and compatible cabinet with simple and lightweight design.
- Easy to disassemble lamp board, power supply, and receiving card (looping backup) on the front side with high- precision aluminum die casting cabinet design.
- The solders are made of lead-free and non-toxic solder paste materials, which will not cause harm to human body and the environment.
- Automatically identify high-brightness and harsh picture details and adjust the brightness of the partial zones with dynamic engine algorithms adopted. The image is soft and comfortable to view and its quality is enhanced when unnecessary power consumption is reduced.
- Automatically remove moisture to protect lamp board from water damage when the device is kept in a humid environment or left unused for a long time.
- Support multiple ways to adjust screen parameters via remote control, tablet, and platforms.
- The packaging adopts recyclable materials, and the whole process of production achieves green and low-carbon standards.
- Please note: Module and cabinet structure should be separately ordered.

## ▪ Specification

<b>Product Model</b>	
Product Model	DS-D4009BW-2FC/A/G
<b>Product Type</b>	
Product Type	Fine Pixel Pitch Indoor Full-color LED Display
<b>Display</b>	
White Balance Brightness	800 cd/m <sup>2</sup>
Color Temperature	3000-10000 K adjustable
Viewing Angle	160°(H)/160°(V)
Contrast Ratio	20000:1
Color Uniformity	≤ ± 0.003Cx, Cy
Brightness Uniformity	≥ 97%
<b>Cabinet</b>	
Pixel Pitch	0.9375 mm
Pixel Pitch Category	P0.9
Pixel Configuration	Flip-chip COB
Pixel Density	1137777 dots/m <sup>2</sup>
Modules Component	2 × 2
Dimensions (W × H × D)	600 mm × 337.5 mm × 29.3 mm (23.622" × 13.287" × 1.154")
Resolution	640 × 360
Area	0.2025 m <sup>2</sup>
Weight	3.4 kg
Cabinet Material	Aluminium die casting
Maintenance Method	Front maintenance for all components
<b>Module</b>	
Dimensions	300 × 168.75 mm
Module Resolution	320 × 160
Protection	Front IP40
LED Life Time	100,000 Hours
<b>Processing Performance</b>	
Driving Method	Constant current driving
Frame Frequency	60 Hz
Refresh Rate	3840 Hz
Grey Level	21 bit
<b>Power</b>	
Max. Consumption	≤ 360 W/m <sup>2</sup> (800 nits)
Average Consumption	≤ 120 W/m <sup>2</sup>
Input Voltage	100~240 VAC ± 10%
<b>Working Environment</b>	
Working Temperature	-10 °C to 40 °C (14 °F to 104 °F)
Working Humidity	10% to 90% RH (without condensation)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)

Storage Humidity	10% to 90% RH (without condensation)
<b>General</b>	
Package Dimensions (W × H × D)	Module: 4-in-1(443X360X52mm) Structure: 5-in-1(708X393X433mm)
Packing List	Regulatory Compliance and Safety Information × 1 Connecting screws, driver IC, iron sheets
G.W.	4.56 kg (1 package in 1 box)
Net Weight	3.4 kg
Certification	EMC Class B and RoHS
Warranty	5 Years
<b>Bracket</b>	
Modular Bracket	standard bracket:DS-DL116033W 1*1;DS-DL226033W 2*2,ultra-thin bracket:DP-D40XXCB22-1X1-Q0.2-NW-Q0.2-ZF

## ▪ Dimension

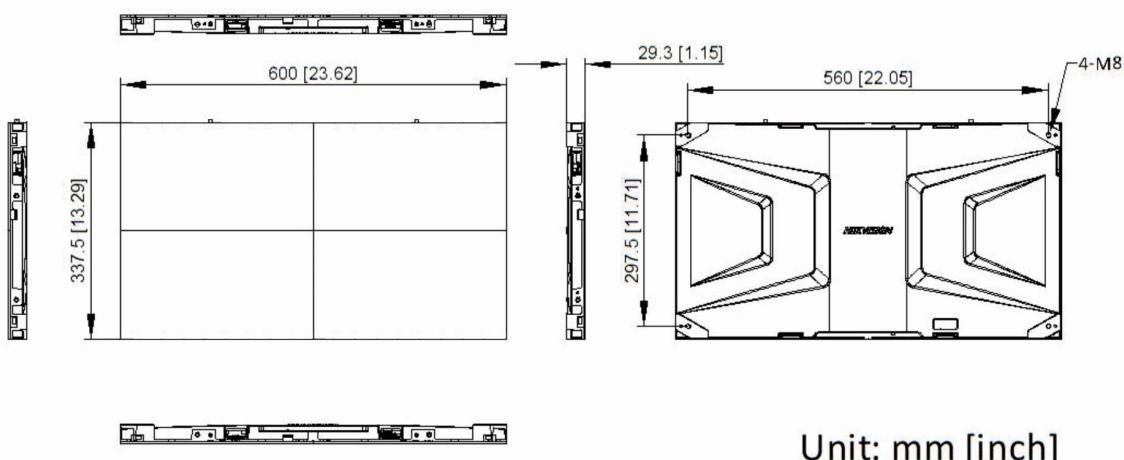

# See Far, Go Further



<https://www.hikvision.com/id/>



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**