

DS-D4212CI-ZWDH(B) LED Display



- Each pixel point on the front of the display unit board module is composed of flip-chip red chip, green chip and blue chip package, and each chip is fixed to the circuit board.
- The back of the display unit board module contains components driver ICs, resistors and capacitors, and the display control system connected to the box can display video, images, and text information.
- The cabinet display unit is a front-dimensional magnetic suction tool, which is equipped with professional magnetic suction tools to complete the installment and debugging
- High Reliability Flip Chip
- Using constant current to drive the chip, uniform light emission, low power consumption
- High contrast ratio can achieve good display effect
- Light weight, easy to Installation and disassembly
- Modular design The whole box is divided into two unit structures: cabinet kits, module brackets

▪ Specification

Model		DS-D4212CI-ZWDH(B)
Cabinet	Pixel Configuration	Flip-chip COB
	Pixel Pitch Category	P1.2
	Pixel Pitch	1.25mm
	Lamp Dimensions	1R1G1B (Flip chip)
	Modules Component	8 Panel
	Dimensions (W × H × D)	600 mm × 337.5 mm ×35 mm
	Resolution	480 × 270
	Area	0.2025 m ²
	Weight	4.5 Kg
	Pixel Density	1638400 dots/m ²
	Lamp Board Housing	No housing
	Cabinet Material	Die-casting Aluminum
	Maintenance Method	Front
	Cabinet Flatness	0.1 mm
	Protection Level	Front protection level IP65
Key Material	Driver IC	ICND2065AP
	Control System	Novastar
Display	White Balance Brightness	1000 cd/m ²
	Color Temperature	3000 K to 10000 K adjustable
	Viewing Angle	Horizontal 150°, vertical 150°
	Contrast Ratio	18000 : 1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
	Dynamic Contrast Ratio	1000000:1

Processing Performance	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	Up to 3840 Hz
	Grey Level	Up to 13 bits
	Display Color	281 trillion
Power	Power Supply	AC100~240V(50-60Hz)
	Max. Consumption	≤ 470 W/m ²
	Average Consumption	< 157 W/m ²
Working Environment	Working Temperature	-10 °C to 40 °C (-14 °F to 104 °F)
	Working Humidity	10%~80%RH
	Storage Humidity	10%~80%RH
	Storage Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
General	Gross Weight	16.47 Kg
	Package Dimension (W × H × D)	712 mm × 362 mm × 448 mm (1 Package 4)(28.03" x 14.25" x 17.64")
	Lifespan	Lamp 100,000 hours

▪ Available Model

DS-D4212CI-ZWDH(B)

DS-D4212CI-ZWDH(B)/AVTECH

DS-D4212CI-ZWDH(B)/H 三代背板备件

DS-D4212CI-ZWDH(B)/R 接收卡备件


DS-D4212CI-ZWDH(B)/P 箱体电源备件

DS-D4212CI-ZWDH(B)600*337.5箱体三代COB/海外仓标配

DS-D4212CI-ZWDH(B)/A 150*168.75/COB灯板备件

DS-D4212CI-ZWDH(B)/(波兰-H)

▪ Dimension

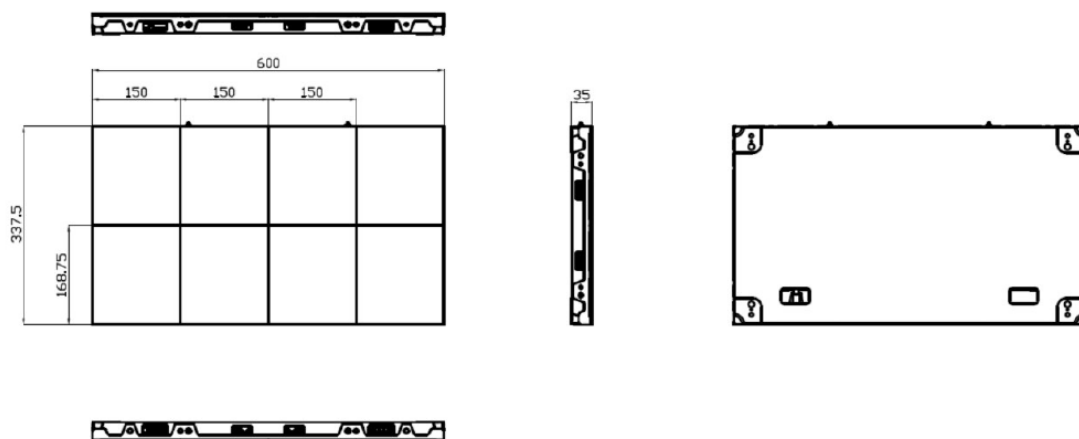

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

[Hikvision](#)[HikvisionHQ](#)[HikvisionHQ](#)[Hikvision_Global](#)[Hikvision
Corporate Channel](#)[hikvisionhq](#)