

## DS-TL2024A LED Strobe Supplement Light



DS-TL2024A supplement light is a special professional lamp for monitoring with high brightness LED as the light source. The product adopts the self-designed lamp heat dissipation structure and constant current drive control method. The precise optical design makes the light intensity evenly and effectively distributed, achieves the overall highlight effect, and provides professional supplement light for video surveillance, vehicle pedestrians and other target detection and capture. Products can be widely used in checkpoints, road monitoring and other systems.

- Adopt aluminum alloy light body, fin-type radiator, and high light transmission with tempering glass.
- High beam LED chips with long lifespan, good stability and high luminous efficiency.
- Professional optical design, light uniformity and target spot distinct.
- Adopt advanced constant current drive technology, which make the current control accurate and stable, enhance the product reliability and reduce the light attenuation effectively.
- Support camera false triggering protection, automatic protection initiation at the abnormal triggering signal and automatic recovery.
- High beam light design with built-in light control, open at low illumination.
- The novelty design of the light, such as small size, light weight and high adaptability, make it quite easy for installation and adjustment.
- The IP66 design make it waterproof and dustproof unfailingly
- LED strobe light, PWM follow-up trigger, with frequency and duty cycle protection function, light-emitting angle of 10°, can cover three lanes with bracket for side mounting, and one lane for center mounting.

## ▪ Specification

Supplement Light	
Light Type	White light
LED Lamp Beads	24
Center Illuminance	200 lx
Angle of Light	10°
Effective Distance	20 to 50 m
Response Time	≤ 20 us
Trigger Manner	TTL level (switch trigger optional)
Trigger Level	5 to 6 V (High level trigger)
Trigger Frequency	50 Hz
Trigger Duty Ratio	5% (Enter the protection state at Duty Ratio ≥ 6%)
Service Life	≥ 50000 Hours
Coverage	1 lane(s)
Color Temperature	2800 K to 3200 K
General	
Power	AC 220 V ± 20% , 0.29 A, 63 W, 3-core terminal block
Material	Aluminum alloy
Dimensions	215.25 mm × 151 mm × 127.5 mm (8.47" × 5.94" × 5.02") (L × W × H)
Package Dimensions	290 mm × 247 mm × 230 mm (11.42" × 9.72" × 9.06") (L × W × H)
Weight	Approx. 2.73 kg (6.02 lb.)
With Package Weight	Approx. 3.4 kg (7.5 lb.)
Operating Condition	-40 °C to 70 °C (-40 °F to 158 °F). Humidity: 10% to 90% (non-condensing)
Storage Condition	-40 °C to 70 °C (-40 °F to 158 °F). Humidity 95% or less (Non-condensing)
Approval	
EMC	EN 50130-4:2011+A1:2014, EN 55032:2015+A11:2020+A1:2020, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC 61000-3-2:2019+A1:2021
Safety	CB: IEC 60598-1:2020, IEC 60598-2-5:2015, IEC 62031:2018, IEC TR 62778:2014, CE-LVD: EN 60598-1, EN 60598-2-5, EN 62031
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP66: IEC 60529: 1989+A1: 1999+A2: 2013

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.


No specific protection

Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ **Available Model**

DS-TL2024A

▪ **Dimension**

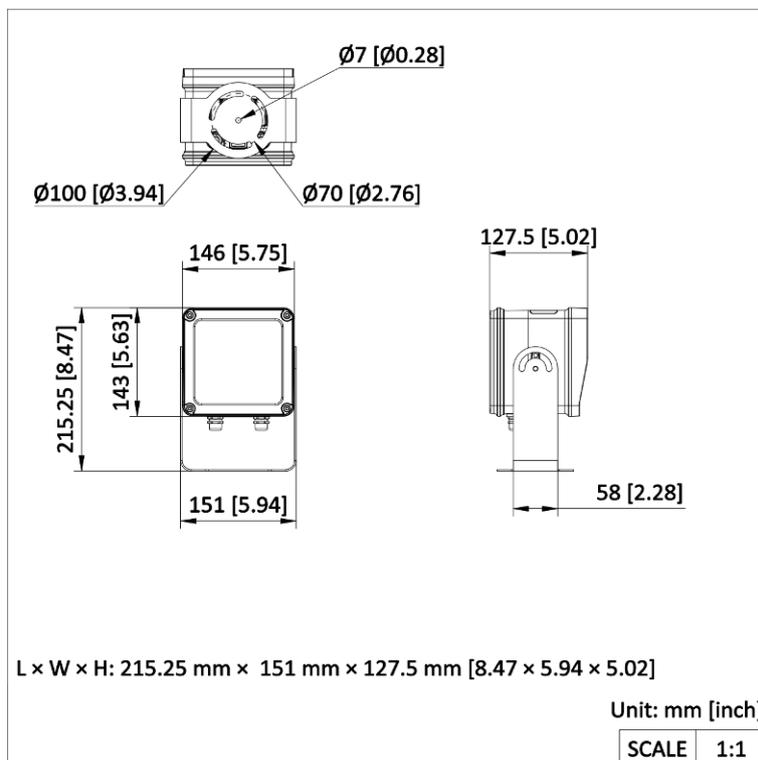

▪ **Accessory**

▪ **Optional**

DS-1130-HWB/110-300 Hoop & Bracket	DS-1278ZJ-HWB Hoop & Bracket

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
 www.hikvision.com



Follow us on social media to get the latest product and solution information.

