

HiLook

By **HIKVISION**

SEGURIDAD DE ALTO DESEMPEÑO AL MEJOR PRECIO




SOLUCIÓN IP HILOOK

www.hikvision.com/es-la

Con una increíble relación costo- beneficio, la Serie HiLook ofrece características avanzadas de este segmento: cuenta con sistema de compresión de vídeo con Codec H.264+ para optimizar el uso de ancho de banda y reducción de almacenamiento de datos sin tener cambios en los parámetros.

Además cuenta con imágenes de video de alta definición de hasta 4 MP y EXIR 2.0 para una mayor eficacia en obtención de imágenes en escenas nocturnas y un amplio rango dinámico para equilibrar el color y el brillo en condiciones de contra luz. HiLook es un nuevo concepto de alto rendimiento y rentabilidad para el sector de la videovigilancia y seguridad, aplicable para cualquier tipo de empresa (Pequeña y/o Mediana).

SOLUCIÓN IP

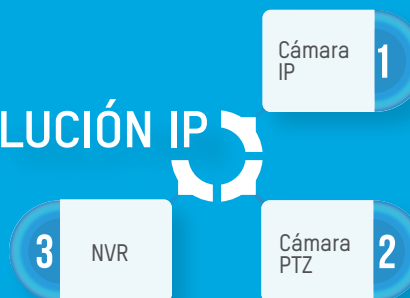

Distribuido por:



Hikvision Latam



PTZ-N4225I-DE

2MP 25X 4 inch EXIR PTZ Network Camera

- Up to 2 MP high definition, 25x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12V DC & PoE+



PTZ-N4415-DE3

4MP 15x Network Speed Dome

- Up to 2MP high definition, 15x optical zoom
- Color: 0.005 Lux @F1.6, B/W: 0.001 Lux @F1.6
- Supports H.265+/H.265
- IK10, DWDR
- 12V DC & PoE+



NVR-104MH-C/4P

4-ch 1 HDD 4 PoE Network Video Recorder

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 POE interfaces
- Standalone 1U case (Metal)



NVR-108MH-C/8P

8-ch 1 HDD 8 PoE Network Video Recorder

- 80 Mbps input max.; up to 8 ch. of IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 POE interfaces
- Standalone 1U case (Metal)



NVR-216MH-C/16P

16-ch 2HDD Network Video Recorder

- 160Mbps input max.; up to 16 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Supports 16 POE interfaces
- Standalone 1U case(Metal)



NVR-104-B/4P | 108-B/8P

4-ch/8-ch 1 HDD 4/8 PoE Network Video Recorder

- 40 Mbps input max.; up to 4 ch. / 8 ch. IP camera input
- 4 ch. / 8ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 POE interfaces
- Mini 1U case (Plastic)



**IPC-B140H****4MP Bullet EXIR Network Camera**

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE

**IPC-B121H****2MP Bullet EXIR Network Camera**

- Up to 2MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.265, H.264+/H.264
- Front Cover: Metal
- Rear Cover&Bracket: Plastic
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE

**IPC-D140H****4MP Dome IR Network Camera**

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Base: Metal, Cover: Plastic
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE

**IPC-D120H****2MP Dome IR Network Camera**

- Up to 2MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- IP67, IK10, DWDR
- Supports PoE

**IPC-T240H****4MP Turret EXIR Network Camera**

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE

**IPC-T221H****2MP Turret EXIR Network Camera**

- Up to 2MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.265, H.264+/H.264
- Cover&Base: Plastic, Eyeball: Metal
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE

**IPC-B640H-V/Z****4MP VF Bullet EXIR Network Camera**

- Up to 4MP high resolution
- 2.8 - 12mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, 120dB WDR
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens

**IPC-B620H-V/Z****2MP VF Bullet EXIR Network Camera**

- Up to 2MP high resolution
- 2.8 - 12mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, DWDR
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens

**IPC-D640H-V/Z****4MP VF Dome EXIR Network Camera**

- Up to 4 MP high resolution
- 2.8 - 12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67 & IK10, 120dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens

**IPC-D620H-V/Z****2MP VF Dome EXIR Network Camera**

- Up to 2 MP high resolution
- 2.8 - 12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67 & IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens,
- -Z: motorized vari-focal lens

**IPC-T641H-Z****4MP VF Turret EXIR Network Camera**

- Up to 4MP high resolution
- 2.8 - 12mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, 120dB WDR
- Cover&Base: Plastic, Eyeball: Metal
- IR Range:Up to 30m
- Supports PoE & TF card slot
- motorized vari-focal lens

**IPC-T621H-Z****2MP VF Turret EXIR Network Camera**

- Up to 2MP high resolution
- 2.8 - 12mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, DWDR
- Cover&Base: Plastic, Eyeball: Metal
- IR Range:Up to 30m
- Supports PoE & TF card slot
- motorized vari-focal lens

**IPC-B121****2MP Bullet EXIR Network Camera**

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.264 & H.264+
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

**IPC-T121****2MP Turret EXIR Network Camera**

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Eyeball: Plastic, Cover: Plastic
- Supports H.264 & H.264+
- DWDR
- IR Range: Up to 10 m
- Supports PoE (exclude "-D" models)

**PTZ-N2204I-DE****2MP 4x EXIR Network PTZ Camera**

- Up to 2MP high definition, 4x optical zoom
- Color: 0.005 Lux @F1.6, B/W: 0.001 Lux @F1.6
- Supports H.265+/H.265
- IP66, IK 10, 120dB WDR
- IR: up to 15m
- 12V DC & PoE

**PTZ-N4215-DE3****2MP 15X 4 inch PTZ Network Camera**

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- 120 dB WDR
- 12V DC & PoE+

**PTZ-N2404I-DE****4MP 4x EXIR Network PTZ Camera**

- Up to 4MP high definition, 4x optical zoom
- Color: 0.005 Lux @F1.6, B/W: 0.001 Lux @F1.6
- Supports H.265+/H.265
- IP66, IK 10, 120dB WDR
- IR: up to 15m
- 12V DC & PoE

**PTZ-N4215I-DE****2MP 15X 4 inch EXIR PTZ Network Camera**

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12V DC & PoE+

