

DS-K4H250S

Single-Door Magnetic Lock

The magnetic lock is designed for wooden door, glass door, and steel door with the opening angle of 90°. The maximum thrust of the lock is 280 kg (617 Lbs). It can be used for controlling door opening/closing, and the indicator shows the door status. It supports signal output of door lock output status testing.



Available Model

DS-K4H250S

Key Feature

- The magnetic lock supports static linear thrust of 280 kg (617 Lbs)
- The power supply can be customized to be 12 VDC or 24 VDC, and the default voltage is 12 VDC
- It is equipped with internal voltage dependent resistor (MOV)
- It is applied to wooden door, glass door, metal door and fireproof door
- LED indicator displays the status of door lock
- Signal output of door lock status (NO\NC\COM)
- Anti-residual magnetism design
- Abrasion-proof materials
- The shell is made up of aldural and is hard anodizing electroplated
- No mechanical failure, and the magnetic lock works by electromagnetism force
- CE and FCC certification





Specifications

Model	DS-K4H250S
Dimension of lock body (L × W × H)	240 mm × 49 mm × 25.5 mm (9.45" × 1.93" × 1.00")
Dimension of armature plate (L × W × H)	180 mm × 38 mm × 11 mm (7.1" × 1.5" × 0.4")
Maximum thrust	280 kg (617 Lbs) linear thrust
Input voltage	12 VDC/24 VDC
Working current	12 V/500 mA, 24 V/250 mA
Signal Output	Dry contact signal output; Support Maximum power rate of 3A; NO output while locking and NC output while unlocking
LED indicator	Red: Door is unlocked Green: Door is locked
Suitable door	Wooden door, glass door, metal door, fireproof door
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	0 to 95% (relative humidity)
Shell	Hard anodizing electroplating operated
Lock body	Eco-friendly Zinc with electroplating operated
Armature plate	Eco-friendly Zinc with electroplating operated
Weight	2.1 kg (4.6 Lbs)



Circuit Board Diagram

Lock status sensor

1. Normally open switch:NO and COM
2. Normally colsed switch:NC and COM

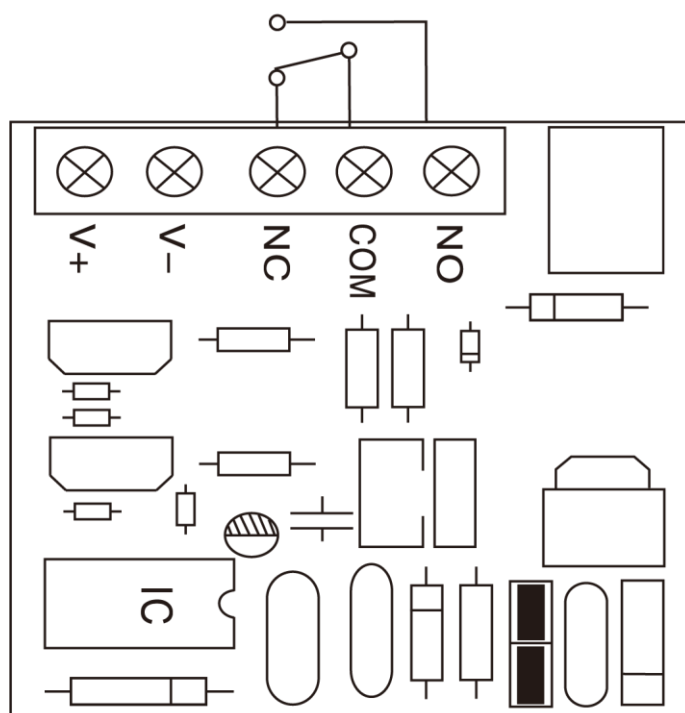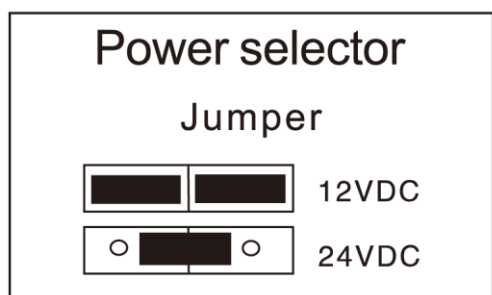


Installation




1 Template

Fold the plate to 90°.




2 Door Frame
Template
Door leaf

Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Door Frame
Template
Door leaf

Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Door leaf


Drill holes based on the marked positions.




5 Make a combination based on the picture.




Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Metal Surface Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm




Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin




6 Setpin

Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Rubber ring

Place the rubber ring between armature plate and door leaf.




9 Allen Key

Use Allen key to remove the mounting plate from lock body.




10 Wire

Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Allen Key

Use Allen key to screw the lock body on the mounting plate.



12 Wire



Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 Screw door

After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.

Installation Instruction



Distributed by

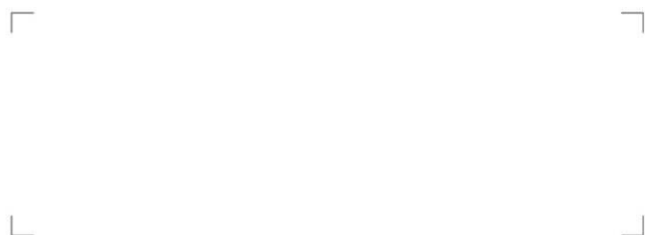

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-[0]31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com