

DS-D5055UC-C 55-inch LCD Monitor



- Designed for surveillance, high reliability and stability
- 55" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation

• Specification

Model		DS-D5055UC-C
Display	Screen Size	55"
	Active Display Area	1209.6 (H) mm × 680.4 (V) mm
	Resolution	3840 × 2160@60 Hz
	Backlight	LED
	Pixel Pitch	0.315 (H) mm × 0.315 (V) mm
	Brightness	350 cd/m ²
	Viewing Angle	178° (H)/178° (V)
	Color Depth	8 bit
	Contrast Ratio	1200:1
	Response Time	8 ms
	Refresh Rate	60 Hz
	Haze	1%
	Reliability	7 × 24 H
	Color Gamut	72% NTSC
Interface	Video & Audio Input	HDMI 1.4 × 1, HDMI 2.0 × 1, VGA × 1, Audio in × 1
	Video & Audio Output	Speaker (8 Ω 5 W) × 2, Audio-Out × 1
	Data Transmission Interface	USB 2.0 × 1
Power	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 145 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% to 80% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	5% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	200 mm × 200 mm (4 × M6-25 mm)
	Bezel Width	8.24 mm (top/left/right), 20.69 mm (bottom)
	Product Dimensions (W × H × D)	Without stand: 1230.08 mm × 713.39 mm × 85.55 mm (48.43" × 28.09" × 3.37") With stand: 1230.08 mm × 786.86 mm × 267.87 mm (48.43" × 30.98" × 10.55")
	Package Dimensions (W × H × D)	1402 mm × 856 mm × 217 mm (55.20" × 33.70" × 8.54")
	Net Weight	16.2 ± 0.5 kg (35.7 ± 1.1 lb.)
	Gross Weight	21.4 ± 0.5 kg (47.2 ± 1.1 lb.)
	Packing List	Monitor × 1, Remote control × 1, Quick start guide (multilingual) × 1, EU energy efficiency label × 1, 1.5-meter power cable × 1, Screw pack × 1
	Remarks	If the appearance and parameters in this specification vary from the actual product, the later prevails. You can also consult local sale staff.

Physical Interface


Interface	Description	Interface	Description
SWITCH	Power Switch Button	100-240V~	AC Power Input
POWER	Power LED Display	HDMI	HDMI 2.0 Digital Input
DP	DP 1.2 Digital Input	VGA	VGA Analog Input
USB	USB 2.0	AUDIO IN	Line-IN 3.5 mm Input
AUDIO OUT	Line-Out 3.5 mm Output	RS 232 IN	RS-232 Input Control
RS 232 OUT	RS-232 Ring Out Control		



Available Model

DS-D5055UC-C

- **Dimension**

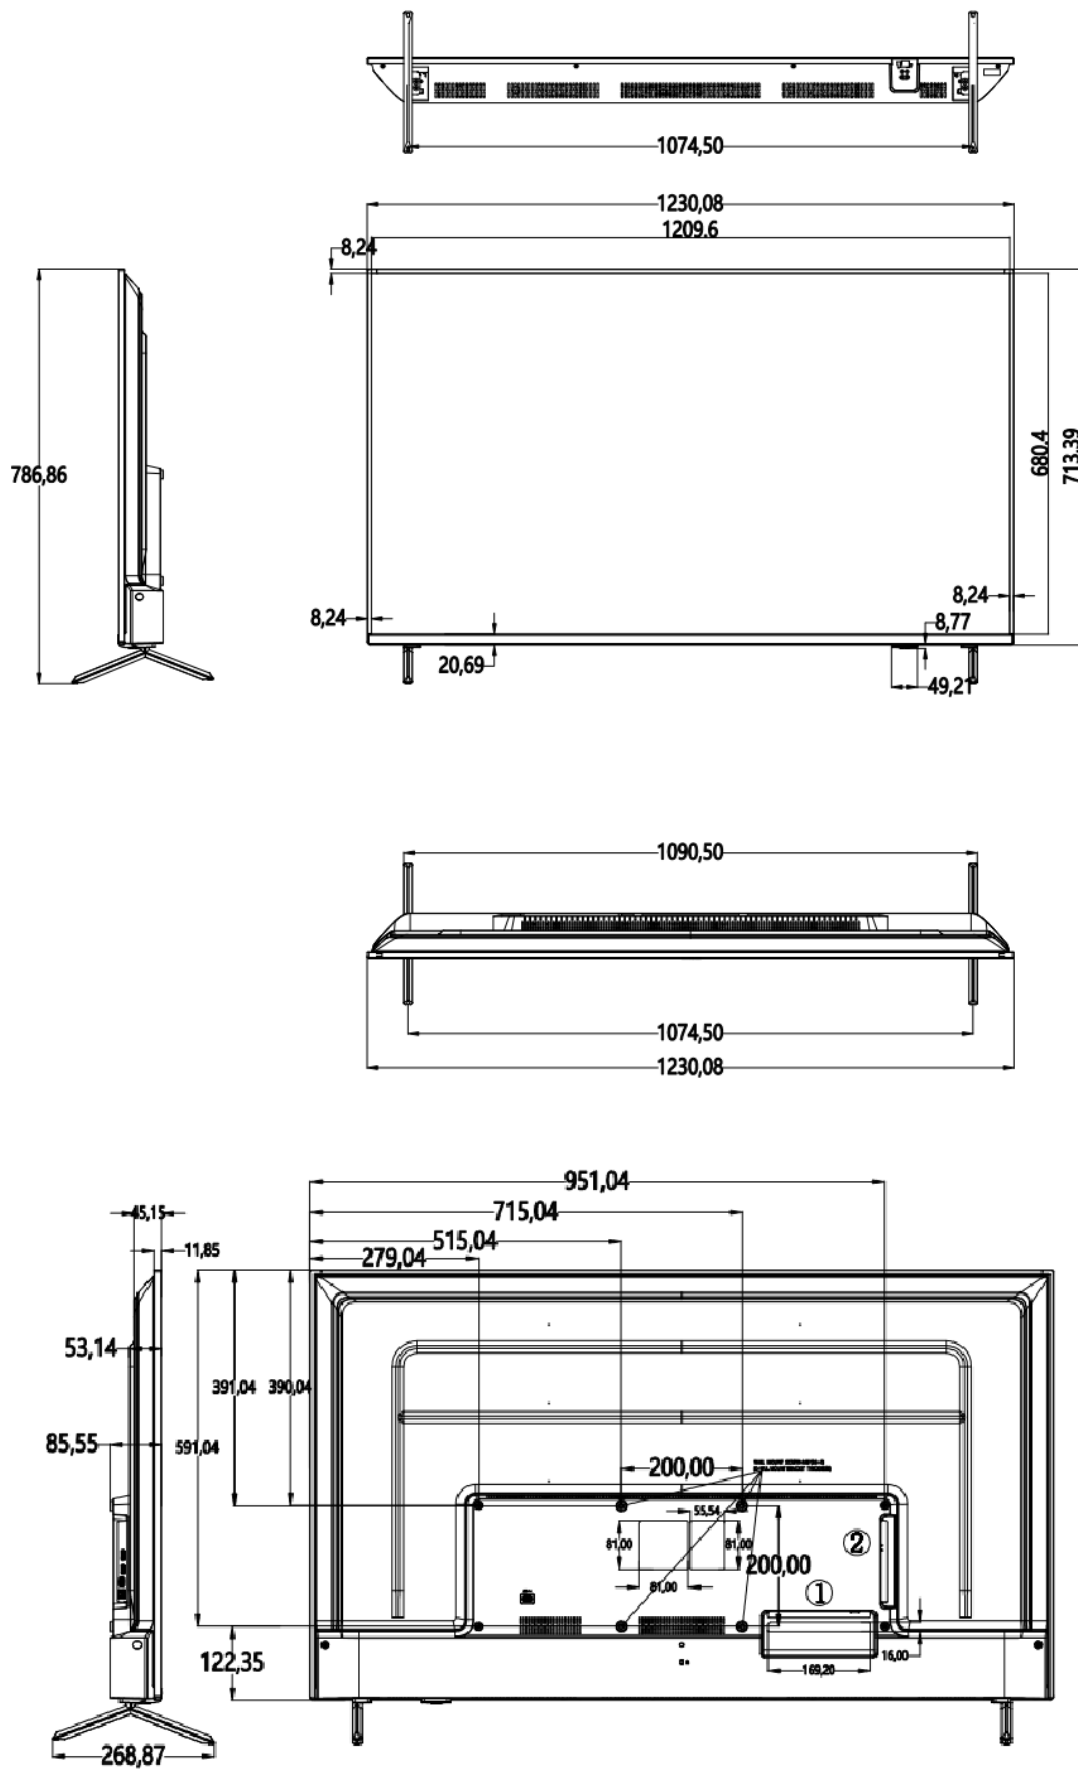

- **Accessory**
- **Optional**

DS-DM4255W
Wall-mounted
Bracket

**Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

