

DS-K3B530X Pro Swing Barriers



The DS-K3B530X series swing barrier with 14 pairs of IR lights is designed to detect unauthorized entrance or exit. By adopting the swing barrier integratedly with the access control system, person should authenticate to pass through the lane via presenting IC or ID card, scanning QR code, etc. It is widely used in office building, hotels, residences, etc.

- 14 pairs of IR light detectors: Permissions validation and anti-tailgating.
- LED light indicates passing direction.
- Valid passing duration settings: System will cancel the passing permission if a person does not pass through the lane within the valid passing duration.
- Support speaker and remote control keyfob optional, need to order separately.

▪ Specification

System	
Motor	Servo motor
MCBF	≥ 12 million times
Network	
Communication protocol	ISAPI
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	For AP mode only
Interface	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
RS-485	4
RS-232	4
Wiegand	NA
Fire alarm input	1
Case input	2
Hardware	
Access controller	Supplied
Supercapacitor	Supplied
Network switch	Not supplied
Power supply for face recognition module	Supported
Keyfob	Supported, order separately
Card receiver	Optional
Capacity	
Card capacity	700,000
Event capacity	700,000
Authentication	
Card type	EM/M1/DESfire/Felica
Function	
Configuration via Web browser	Supported
Configuration via mobile Web browser	Supported
Audio prompt	Supported
AP mode	Supported
General	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
IR light detectors	14 pairs
Lane width	For acrylic or stainless pipe: 550 mm to 1100 mm (21.65" to 43.31") For full-height door wings: Height 1.2 m, 1.4 m, 1.6 m, 1.8 m (max 900mm)

Distance between barrier and ground	1.2 m,1.4 m,1.6 m,1.8 m
Barrier material	Acrylic, Stainless steel pipe, Tempered glass
Pedestal material	SUS304 stainless steel 1.5mm(0.06")
Indicator	Yes
Power	100 to 240 VAC; 50 to 60 Hz
Power consumption	55W per lane
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No Condensing)
Protective level	IP34
Dimensions	With packaging: 1610 mm (63.39") × 410 mm (16.14") × 1255 mm (49.41"); Without packaging: 1500 mm (59.06") × 130 mm (5.12") × 1000 mm (39.37");
Weight	(Net) Left: 62.78 kg (138.4 lbs); Middle: 82.4 kg (181.7 lbs); Right: 64.78 kg (142.8 lbs); (Rough) Left: 101.18 kg (223.1 lbs); Middle: 45.54 kg (286.4 lbs); Right: 103.18 kg (227.5 lbs);
Approval	CE/CE-LVD/CB/RoHS/REACH/WEEE
Configuration	
Lane width	650;750;900;1100
Pedestal length	1500 mm
Module selection	YES
Pedestal width	130 mm
Wall distance	20 mm
Base	YES
Barrier material	Acrylic glass
Application environment	Indoor and outdoor
Authentication mode	Card,Face,QR code
Card type	EM,M1,Desfire
Recommended width	650 mm
Base model	DS-B530-BASE
Product type	Swing barrier
Remote controller type	433Mhz,868Mhz
Movement Protrusion Width	72 mm
Door Height	Default(0.85m);1.6m
Convert Face	NO
Door wing gap	Default:50mm

▪ Available Model


DS-K3B530X-L/MPg-Dp65
 DS-K3B530X-M/MPg-Dp65
 DS-K3B530X-R/MPg-Dp65
 DS-K3B530X-L/Pg-Dp65
 DS-K3B530X-L/MPg-Dp90
 DS-K3B530X-L/M-Dp65
 DS-K3B530X-M/Pg-Dp65
 DS-K3B530X-M/MPg-Dp90

DS-K3B530X-M/Pg-Dp65-90
DS-K3B530X-M/MPg-Dp65-90
DS-K3B530X-M/MPg-Dp90-65
DS-K3B530X-M/M-Dp65
DS-K3B530X-R/Pg-Dp65
DS-K3B530X-R/MPg-Dp90
DS-K3B530X-R/M-Dp65
DS-K3B530X-L/MPg-Dp65/Black
DS-K3B530X-L/MPg-Dp90/Black
DS-K3B530X-M/MPg-Dp65/Black
DS-K3B530X-M/MPg-Dp90/Black
DS-K3B530X-M/MPg-Dp65-90/Black
DS-K3B530X-M/MPg-Dp90-65/Black
DS-K3B530X-R/MPg-Dp65/Black
DS-K3B530X-R/MPg-Dp90/Black
DS-K3B530X-M/ED
DS-K3B530X-M/ED-868
DS-K3B530X-L/MPgQ-Dp110
DS-K3B530X-R/MPgQ-Dp110
DS-K3B530X-L/MPg-Dp110
DS-K3B530X-M/MPg-Dp110
DS-K3B530X-R/MPg-Dp110
DS-K3B530X-L/MPg-Dp90/COLOMBIA
DS-K3B530X-R/MPg-Dp90/COLOMBIA
DS-K3B530X-M/MPg-Dp90/LA
DS-K3B530X-L/MPg-Dp75/Black
DS-K3B530X-R/MPg-Dp75/Black
DS-K3B530X-L/MPg-Dp110/Black
DS-K3B530X-L/M
DS-K3B530X-M/M
DS-K3B530X-R/M
DS-K3B530X-L/MPg
DS-K3B530X-M/MPg
DS-K3B530X-R/MPg
DS-K3B530X-R/MPg-Dp110/Black
DS-K3B530X-L/MQ-Dp75
DS-K3B530X-M/MQ-Dp75
DS-K3B530X-R/MQ-Dp75
DS-K3B530X-L/MPgQ-Dp55
DS-K3B530X-M/MPgQ-Dp55
DS-K3B530X-R/MPgQ-Dp55
DS-K3B530X-L/MPgQ-Dp65
DS-K3B530X-M/Dp65/868
DS-K3B530X-M/D
DS-K3B530X-R/MPgQ-Dp65/868
DS-K3B530X-L/D
DS-K3B530X-R/D

DS-K3B530X-M/MPg-Dp65-110
DS-K3B530X-L/MPgQ-Dp110/TEO
DS-K3B530X-R/MPgQ-Dp110/TEO
DS-K3M230-B530X Mainboard
DS-K3B530X-L/MPg-Dg65H18
DS-K3B530X-M/MPg-Dg65H18
DS-K3B530X-R/MPg-Dg65H18
DS-K3B530X-L/MPg/PERU SAC/316L
DS-K3B530X-M/MPg/PERU SAC/316L
DS-K3B530X-R/MPg/PERU SAC/316L
DS-K3B530X-L/MPg-Dg60H12
DS-K3B530X-M/MPg-Dg60H12
DS-K3B530X-R/MPg-Dg60H12
DS-K3B530X-L/EPg
DS-K3B530X-M/EPg
DS-K3B530X-R/EPg
DS-K3B530X-L/EPgQ-Dg55H12
DS-K3B530X-M/EPgQ-Dg55H12
DS-K3B530X-R/EPgQ-Dg55H12
DS-K3B530X-L/Dg65H18
DS-K3B530X-M/InMPg-Dg65-90H18
DS-K3B530X-R/MPg-Dg90H18
DS-K3B530X-M/MPg/868
DS-K3B530X-R/MPg/868
DS-K3B530X-L/MPg-Dg65
DS-K3B530X-M/InMPg-Dg110-65
DS-K3B530X-M/OutMPg-Dg65
DS-K3B530X-R/Dg65
DS-K3B530X-M/InMPg-Dg65
DS-K3B530X-L/Dg110
DS-K3B530X-R/MPg-Dg65
DS-K3B530X-L
DS-K3B530X-M
DS-K3B530X-R
DS-K3B530X-M/MPg-Dg65
DS-K3B530X-M/MPg-Dg65-90
DS-K3B530X-R/MPg-Dg90
DS-K3B530X-M/M-Dp65-90
DS-K3B530X-R/M-Dp90
DS-K3B530X-L/EPgH
DS-K3B530X-M/EPgH
DS-K3B530X-R/EPgH
DS-K6B530TMX-M/Dp90
DS-K6B530TMX-R/Dp90
DS-K3B530X-L/MPg-Dg75H12
DS-K3B530X-M/MPg-Dg75-65H12
DS-K3B530X-M/MPg-Dg65H12


DS-K3B530X-R/MPg-Dg65H12
DS-K3B530X-L/Dg90H12
DS-K3B530X-R/Dg90H12
DS-K3B530X-L/MQ
DS-K3B530X-R/MQ
DS-K3B530X-L/MPgQ
DS-K3B530X-M/MPgQ
DS-K3B530X-R/MPgQ
DS-K3B530X-L/PgQ
DS-K3B530X-M/PgQ
DS-K3B530X-R/PgQ
DS-K3B530X-M/MQ
DS-K3B530X-L/Pg
DS-K3B530X-M/Pg
DS-K3B530X-R/Pg
DS-K3B530X-L/Q
DS-K3B530X-M/Q
DS-K3B530X-R/Q
DS-K3B530X-L/E
DS-K3B530X-R/E
DS-K3B530X-M/E
DS-K3B530X-M/M/868
DS-K3B530X-R/M/868
DS-K3B530X-L/MPg-Dm110
DS-K3B530X-M/MPg-Dm110
DS-K3B530X-R/MPg-Dm110
DS-K3B530X-L/MPg-Dp90/DZ/H15
DS-K3B530X-R/MPg-Dp90/DZ/H15
DS-K3B530X-L/M-Dp140/DZ
DS-K3B530X-R/M-Dp140/DZ
DS-K3B530X-L/MPg/Black/DZ
DS-K3B530X-M/MPg/868/Black/DZ
DS-K3B530X-R/MPg/868/Black/DZ
DS-K3B530X-R/Modular
DS-K3B530X-L/Modular
DS-K3B530X-M/Modular

▪Dimension

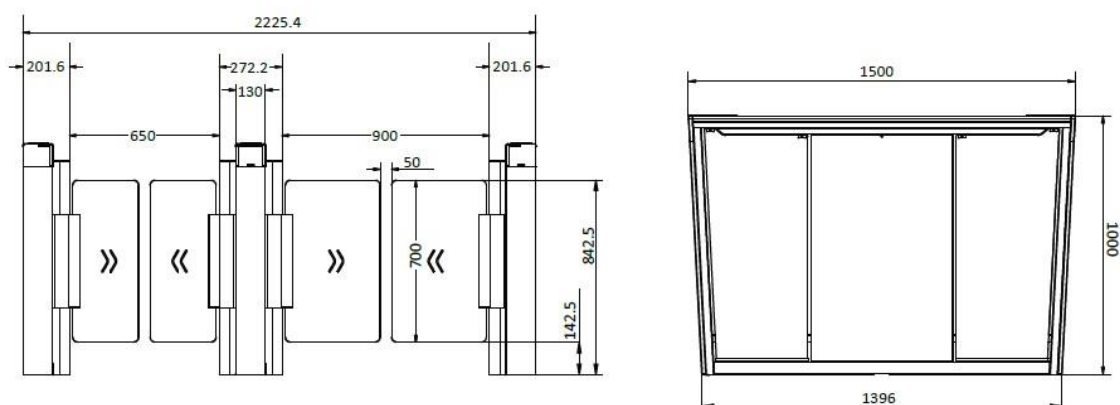

▪ Accessory

▪ Optional

DS-K7B01	DS-K7SP01	DS-K7R01-868	DS-K7R01-433	DS-B530-BASE
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

