


HIKVISION®

AX PRO SERIES
WIRELESS ALARM SYSTEM
**SIMPLICITY THROUGH
INNOVATION**



Completely app-driven, and featuring a wide range of on-demand products, the AX PRO Wireless Alarm System is now available.

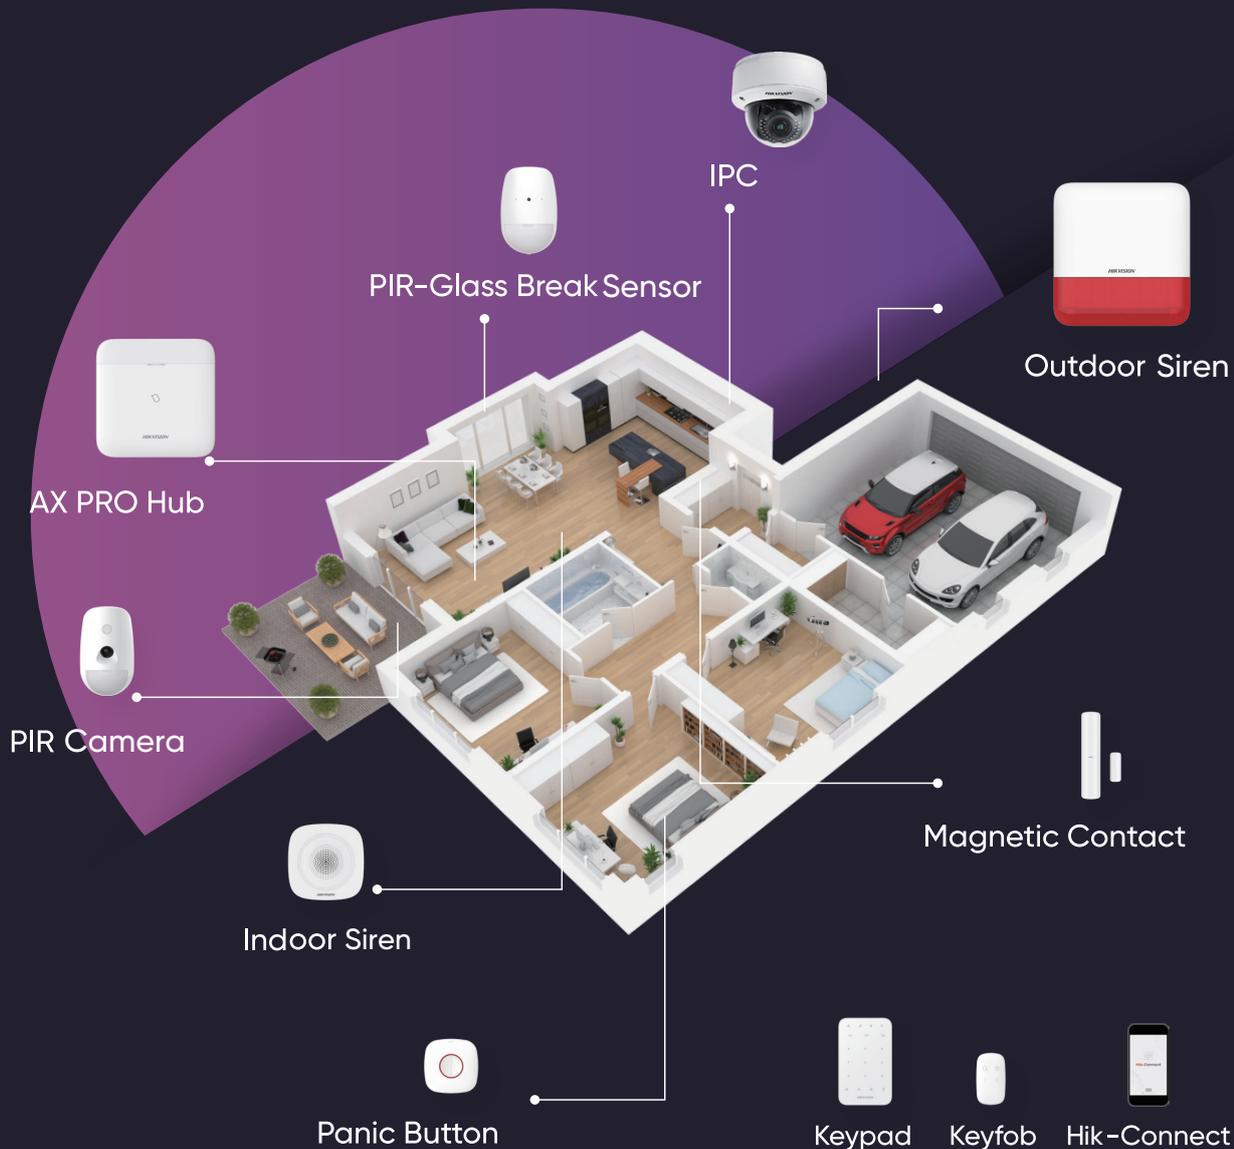


IVaaS

(Intruder Verification as a Service)
 With IVaaS, a 7 second video and GIF imaging can be received via Hik-Connect for timely verification when alarm is triggered.



Tri-X & CAM-X wireless technology

Fast, reliable and secure, powerful Tri-X and CAM-X wireless technology delivers the next level of security.

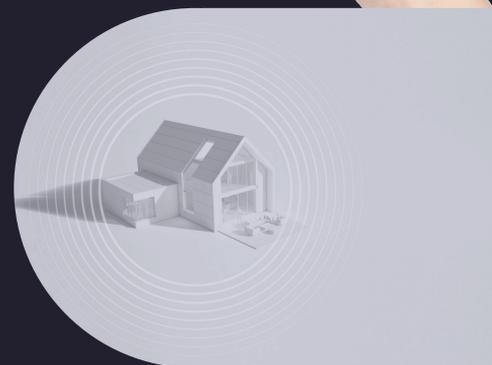

AX PRO Hub



- Wi-Fi module
- GPRS/3/4G module
- IPC and PIRCAM supported
- Tri-X & CAM-X wireless technology
- Hik-ProConnect / Hik-Connect
- SIA/CID protocol

PIRCAM Detector

- CAM-X wireless technology
- Up to 800 m transmission distance
- 12 m detection range
- Up to 30 kg pet immunity
- Up to 20 photos fused into a GIF



Repeater



- Expand 1600m for Tri-X and 800m for CAM-X transmission
- Up to 35 hrs battery backup
- Smart auto-pairing

Motion Detector

The AX PRO Motion sensor series is equipped with cutting-edged technology to offer accurate and stable motion detection

PIR/Curtain Detector



- Detection Range: 15m, 85.9°(Curtain version: 6.3°)
- Pet-immunity: 30KG
- Digital temperature compensation

Dual tech Detector

- PIR + 24GHz Microwave
- Detection Range: 12m, 85.9°
- Pet Immunity: 30KG



PIR-Glass Break Detector



- Motion + Glass Break Detection
- PIR Range: 12m, 85.9°
- Glass Break Range: 8m
- Pet-immunity: 30KG

Glass Break Detector

- Detection Range: 8m
- External Input : NO/NC/Impulse Count



Magnetic Contact

Easily installed and featuring smart remote programming the Wireless Slim Magnetic Contact is capable of up to 1600m long distance radio frequency transmission; impressive for something so small

Standard Magnetic Contact



- Detection Gap: 43mm Max
- Support 2 channels wired terminal

Slim Magnetic Contact



- Detection Gap: 52mm Max

Magnet-Shock Detector



- Magnetic Contact + Shock
- Detection Gap: Up to 43mm
- Shock Detection: High/Normal/Low
- Tilt Detection : Up to 25°
- Support extra 2 channels wired terminal

Control Device

Various arming and control options suit for daily operation

Keypad



- Full touch key design with LED backlight
- LED indicates the programmed area
- Arming, disarming, alarm clearing for different areas
- One-Push fire alarm, panic alarm, and medical alarm. etc.
- Support output control

Tag Reader



- Operation: Stay arm/away arm/disarm by areas
- Support patrol tag check in

Keyfob



- Indicate command with LED
- Programmable function via combination of keys

Other Peripherals



**Smoke
Detector**



**Water Leak
Detector**



Panic Button



Smart Plug



**Relay/
wall switch**



**Internal/External
Siren**

Application Scenarios



Residential



Office



Retail