

DS-K1T671TMFWUHK Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Prompt voice and light for accepted or rejected attendance
- Viewable and exportable for device log transactions
- 7-inch color LCD touch screen, 2 Mega pixel CMOS wide-angle lens, built-in Mifare card reading module
- Face recognition distance (without face mask): 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- Max. 50,000 Users
- Face, Fingerprint and Cards
- Up to 3 Fingerprint per user
- Two-way audio with client software, indoor station, and main station
- Supports TCP/IP, Wi-Fi
- Support 1:N and 1:1 authentication
- Configuration via device and web client
- Supports ISAPI and ISUP5.0 protocol
- IP65
- Dual Core CPU 1.0 GHz
- Memory: 8GB Flash + 1GB RAM



▪ Specification


System	
Operation system	Linux
Display	
Dimensions	7-inch
Type	LCD
Operation method	Capacitive touch screen
Video	
Pixel	2 MP
Lens	2
Audio	
Tone quality	Noise suppression and echo cancellation
Network	
Wired network	10 M/100 M/1000 M self-adaptive
Wi-Fi	Support
Interface	
Network interface	1
RS-485	1
Wiegand	1
Lock output	1
Exit button	1
Door contact input	1
IO input	2
IO output	1
Power interface	2-pin
TAMPER	1
USB	2
Capacity	
User Capacity	Up to 50,000
Event capacity	100,000
Authentication	
Authentication Type	Face, Fingerprint and Cards
Card type	Mifare 1 card
Card reading frequency	13.56 MHz
Card reading distance	0 to 5 cm
Face recognition duration	< 0.2 s per person
Face recognition accuracy rate	≥ 99%
Face recognition distance	0.3 to 3 m (Without face mask)
False Accept Rate	0.0001%
False Reject Rate	0.01%
Optical sensor	DPI 500
Function	
QR code recognition	Support
Face anti-spoofing	Support

Advertisement	Support
Audio prompt	Support
SSL	Support
Time synchronization	Support
General	
Power supply method	2 pin connector
Power supply	12 VDC / 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (No condensing)
Dimensions	290 mm × 116.5 mm × 33 mm (11.4" × 4.6" × 1.3")
Protective level	IP65
Installation	Wall mounting
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional

▪ Available Model

DS-K1T671TMFW

▪ Dimension

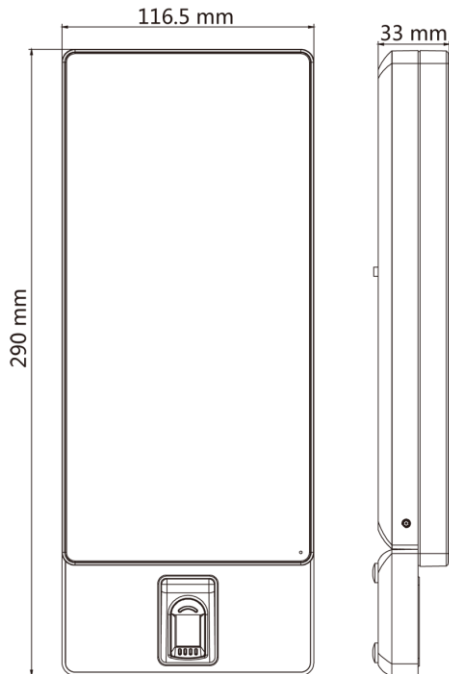

With Fingerprint Module

- Accessory
- Optional

DS-KAB671-B Stand Stick	DS-KAB671-S Protective Shield	DS-KAB671-P1
		

Distributed by


HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com