

DS-PM-MO4-H

MBUS 4 Outputs Expander




Overview

The DS-PM-MO4-H 4-ch MBUS 4 outputs expander is equipped with 8-bit address DIP switch. It can control 4-ch of normally open (NO) or normally closed (NC) relay output when connecting to the control panel via MBUS.



Physical Interface

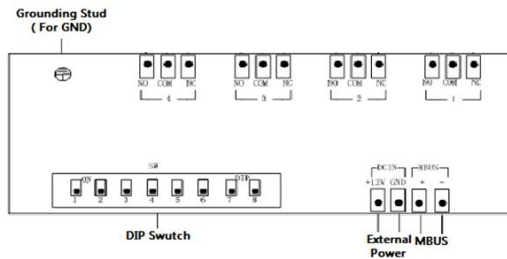

Caution

- Power off both the expander and control panel and set the DIP address on the expander before installation.
- Using different device addresses for expander on MBUS.
- The available device address for expander is from 1 to 253. The address 0,254 and 255 are not available.
- Power on the expander before powering on the control panel.
- Insure reliable ground connection for the shell of the expander.

Specification

DS-PM-MO4-H MBUS 4 Outputs Expander	
Power Supply	DC 12V
Operation Temperature	-10°C to +55°C
Humidity	10% to 90%
Relay	30 VDC / 1A
Dimension(L*W*H)	114 mm *187 mm *31 mm
Weight	956g