

## DS-AT1000S/224 Series Storage System

### Introduction

DS-AT1000S/224 series storage system is a storage product with huge capacity and high-density design. A 3U chassis provides up to 224 TB capacity. Compared to general storage product, DS-AT1000S reduces the total cost at up to 40%. VRAID 2.0 technology realizes an intensive management for storage space and data, and protects the data security from substructure. Hierarchical storage technology improves data search performance by at least 10 times. Periodic HDD replacement guarantees the product availability.



### Key Feature

#### Huge Capacity and High Density

- A 3U chassis provides up to 224 TB capacity
- High-density design reduces the installation space requirement and transportation cost

#### Low consumption

For 14 TB enterprise HDD, lower consumption for each terabyte at 70%

#### Security and Reliability

- VRAID 2.0 technology and N + M redundant mechanism allow up to 2 error HDDs in a single RAID
- HDD encryption technology protects data security by only allowing Hikvision device to read the data in HDD

#### Maintenance-Free

- Rebuild fault HDD on-demand
- HDD periodic automatic replacement

#### Stream Data Management Structure of High Performance

Based on the bottom layer management structure of the stream media, it solves the problem that the damaged file system will lead to file unreadability or loss and ensures no file fragments will be produced during overwriting

#### Direct Storage of Mixed Stream

- Supports mixed storage of video stream and SMART stream
- Supports camera access through protocols including RTSP, ONVIF, PSIA, etc.

#### VRAID 2.0

Erasur encoding and VRAID 2.0 technologies ensure data integrity even when 2 HDDs in a single RAID are error. If the number of error HDD exceeds redundant limit, other HDDs can still be read and written

#### Abundant Application

- Continuous recording, manual recording, and alarm recording
- Provides Automatic Network Replenishment (ANR) feature to ensure data integrity when network is abnormal
- Supports data backup to ensure data security

#### User-Friendly Operation and Maintenance


- Supports one-key configuration to improve system configuration efficiency
- Raises device maintenance efficiency via abundant alarm management methods, like alarm via indicators, mobile phone messages, and emails.



## Specification

Model		DS-AT1000S/224
Performance	Video (2 Mbps stream + rebuilding)	256-ch
Controller	Processor	64-bit multi-core processor
	Cache	12 GB, extendable to 32 GB
Storage	HDD slot	16
	Interface	SATA
	Capacity	Up to 14 TB
	VRAID	VRAID 2.0
	Disk	Disk detection pre-alarm and repair
	Logical volume	Recording volume management
Recording	Recording type	Continuous recording, manual recording, and alarm recording
	Video backup	Local backup and video uploading
	Video protection	Video lock, video loss alarm
	Search and download	Log in storage system to search, play, and download videos. Support searching videos by time, event type, and smart information
Maintenance and Management	Management method	GUI based on web, serial port CLI, platform
	Alarm method	Audio, indicator, GUI
Network	Protocol	RTSP, ONVIF, HKSDK
External interface	Data network interface	4, 1000 Mbps Ethernet interface
	Management network interface	1, 1000 Mbps Ethernet interface
	SAS interface	2
	COM interface	1, RS-232
	USB interface	2, USB 3.0
	HDMI interface	2
	VGA interface	Supported (VGA and RS-232 interface cannot be used at the same time)
General	Power supply	100 to 127 VAC or 200 to 240 VAC/47 to 63Hz, redundant power supply
	Power consumption (with HDDs)	≤ 255 W
	Environment temperature	<ul style="list-style-type: none"> <li>● Working: 5 °C to 40 °C (41 °F to 104 °F)</li> <li>● Storing: -20 °C to +70 °C (-4 °F to +158 °F)</li> </ul>
	Environment humidity	<ul style="list-style-type: none"> <li>● Working: 20% to 80% RH (non-condensing/frozen)</li> <li>● Storing: 5% to 90% RH (non-condensing/frozen)</li> </ul>
	Dimensions (W × D × H)	440 × 132 × 495 mm (14.3 × 5.2 × 19.5 inch)
	Weight (without HDDs)	≤ 20 kg (44.1 lb)

## Physical Interface

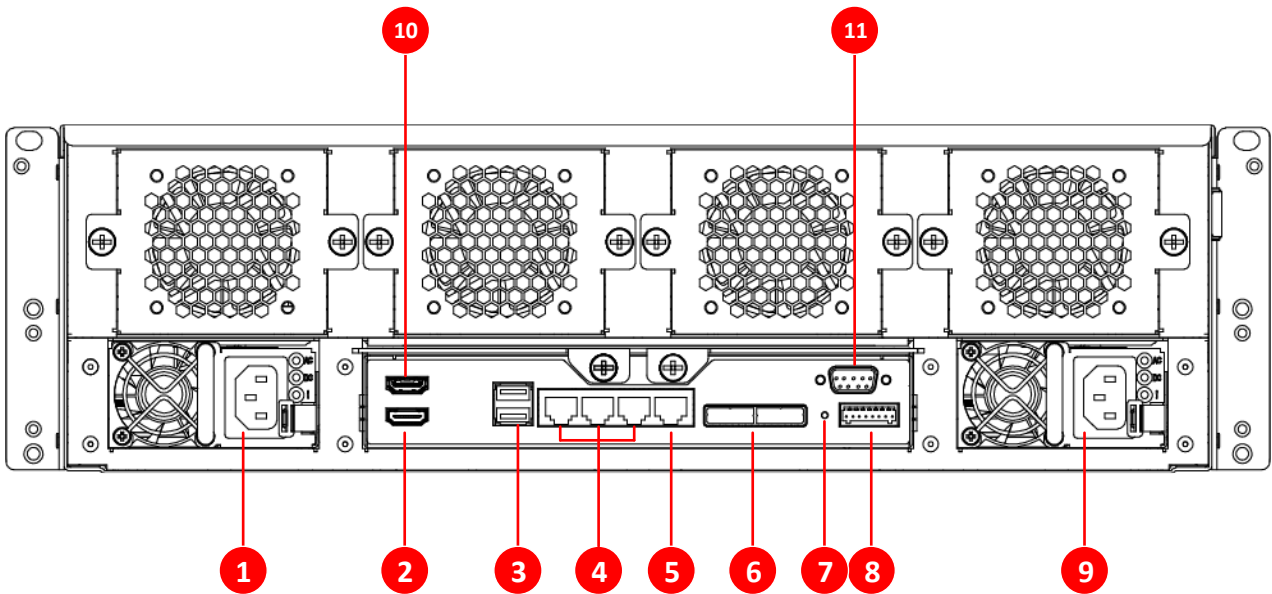

No.	Name	No.	Name
1	Power module 1	7	Reset button
2	HDMI interface 1	8	Alarm interface
3	USB interface	9	Power module 2
4	Data network interface 1 to 3	10	HDMI interface 2
5	Management network interface	11	RS-232 interface
6	SAS interface		

## Available Model

DS-AT1000S/224

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 [10] 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33[0]1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com