

DS-D42C08-H LED Full-Color Display Controller



DS-D42C08-H LED Full-Color Display Controller can be used with the full-color display units to achieve the seamless jointing of the video wall in any dimensions. It is applicable to the meeting rooms, studio, gym, airport, bank, advertisement, family cinema, etc.

- 2 x 1080P resolution input/output
- 3840 Hz high visual refresh rate
- High color domain coverage ratio

Features and Functions

- Eight Gigabit Ethernet output ports, each with 650 thousand pixels load at most
- Multi-controller cascade display, multicast control to realize synchronization
- Super long subtitle display, and left-justifying and right-justifying, centering and scroll display
- Automatic dehumidification to protect damp led, and four humidity modes suit the areas of different humidity
- Quick and convenient operation by remote client software
- Obtains IP address on random network segment to make sure no conflicts among IPs and network security

Superior Image Processing

- 16 bit depth of processing, low light and high grey to restore the colors of original images
- 3840 Hz high refresh rate, nanosecond response time, and smooth video pictures
- Automatic brightness and self-adaption to environmental lightness (with multi-function card)
- Image color temperature adjustment with standard, cold, warm colors selectable
- Highly reliable pixel-by-pixel screen correction to ensure the consistency between brightness and chromaticity
- Manual visual piece revision to dilute and smooth the gap
- Image enhancement adjustment to improve the visual display

Powerful System Functions

- DVI, DP, and HDMI signal sources available, and automatic signal source detection without changing the signal source manually
- HD signal input at up to 3840 x1080@60Hz and point-to-point output
- Supports signal input at any resolution (Up to 4 million pixels allowed), and zooms randomly in the output range
- Self-adaptive EDID, and automatic matching the best resolution
- Loop inputs and outputs signals to provide security for display signal



Specifications

Model	DS-D42C08-H	
Interfaces	Signal input	1-ch DVI, 1-ch HDMI, 1-ch DP
	Signal output	8ch ports output, 1ch DVI output
	Signal control	Network
Processing Performance	Max. resolution	3840 x 1080@60Hz or 1920 x 2160@60Hz
	Frame frequency	60 Hz
	Refresh rate	3840 Hz
	Processing depth	16 bits
	Grey level	65535 bits
	Color	281.4 trillion
	Brightness control	Automatic/manual
General	Dimensions	482.6 x 250 x 44.5 mm (19 x 9.8 x 1.8 inch)
	Power supply	100 to 240 VAC
	Average power dissipation	≤ 20W
	Working temperature	-10 to 45 °C (14 to 113 °F)
	Storage temperature	-20 to 60 °C (-4 to 140 °F)
	Working humidity	10 to 90%
	Storage humidity	10 to 90%

*: All specifications mentioned above are subject to the actual product.


Hardware interface picture

Front Panel



Indicator	Description	Indicator	Description
PWR	Power indicators	ACTIVE	Signal source status light (flickers when examine signal source, while slowly when no signal source)
INFO	Receiving card status indicator (Blinks quickly when receiving card is offline while blinks slowly when receiving card is online)	HDMI	Lights when signal source is switched to HDMI
DP	Lights when signal source is switched to DP	DVI	Lights when signal source is switched to DVI
Brightness Level	Brightness display, and device IP address display	- +	Brightness adjustment in normal mode. Switching test images in test mode.
Source	Short press to change signal button, long press to enter image test mode		

Rear Panel

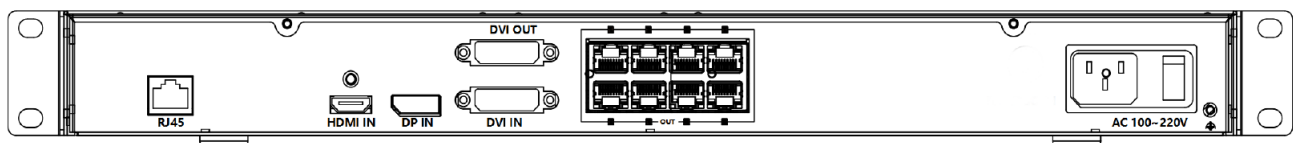

Interface	Description
RJ45	Network signal input
HDMI IN	HDMI digital signal input
DP IN	DP digital signal input
DVI IN	DVI digital signal input
DVI OUT	DVI digital signal loop output
OUT	One-to-four port

Typical Applications



Available Models

DS-D42C08-H

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com