


DS-D5032FC-A 31.5" Monitor



Key Features

- Adopt 3-D digital comb filter
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.4 input interface, support HDCP
- Adopt 3D noise reduction technology
- Programmable 12-bit RGB gamma correction technology
- Support software spread-spectrum technology to reduce EMI radiation
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge
- High reliability and stability, 24/7 operation
- Green energy: Supporting set standby mode while no signal input, set the sleep time

Interfaces

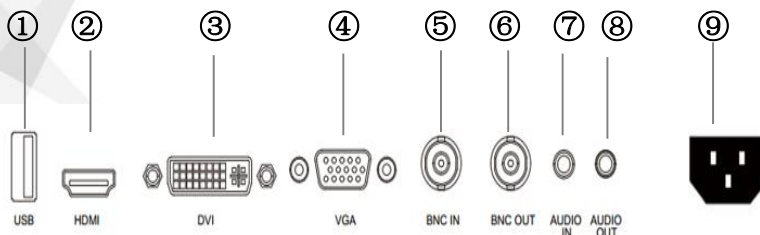

NO.	Description
1	USB
2	HDMI: HDMI signal input
3	DVI: DVI signal input
4	VGA: VGA Analog Signal Input
5	BNC IN: BNC signal input
6	BNC OUT: BNC signal output
7	AUDIO IN
8	AUDIO OUT
9	AC power input

Model


DS-D5032FC-A



Specifications

Model	DS-D5032FC-A	
Backlight	LED Backlight	
Screen Size	31.5 inch	
Pixel Pitch	0.12125 mm (H) × 0.36375 mm (V)	
Max Resolution	1920×1080@60Hz	
Brightness	300 cd/m ²	
Contrast	1000: 1	
Response Time	8 ms	
Color	16.7M	
Active Area (H×V)	698.40 mm x 392.85 mm	
Viewing Angle	Horizontal 178°, vertical 178°	
Interfaces	DVI input	1
	HDMI input	1
	VGA input	1
	BNC(in/out)	In×1, Out×1
	PC Audio(in/out)	In×1, Out×1, 3.5 mm mini-jack
	USB	1
Loudspeaker	2 W x 2, 6Ω	
Power Supply	AC 100 ~ 240 V , 50/60 Hz	
Power Consumption	≤45W	
Standby Power Consumption	≤ 0.5 W	
Working Temperature	0 to 40 ° C (32 to 104 ° F)	
Working Humidity	10 to 85 %	
Storage Temperature	-10 to 55 ° C (-4 to 131 ° F)	
Storage Humidity	5 to 95%	
Color of Casing	Black	
VESA	M4, 100 mm × 100 mm	
Dimensions(W*H*D)	729mm x 433mm x 50mm / 728.8mm x 526mm x 167.2mm(with base)	
Package Dimension (W×H×D)	803mm x 513mm x 197mm	
Gross Weight	9.25Kg	
Net Weight	5.75kg	
Accessories	VGA cable	1
	HDMI cable	1
	Power cord	1
	Remote control	1
	Battery	2
	User manual	1
	Base bracket	1
	Warranty card	1
Bracket	Base bracket	Contain 1
	Wall mounted	Optional DS-DM1940W
*Note	All specifications mentioned above are subject to the actual product	

Dimensions (unit: mm)

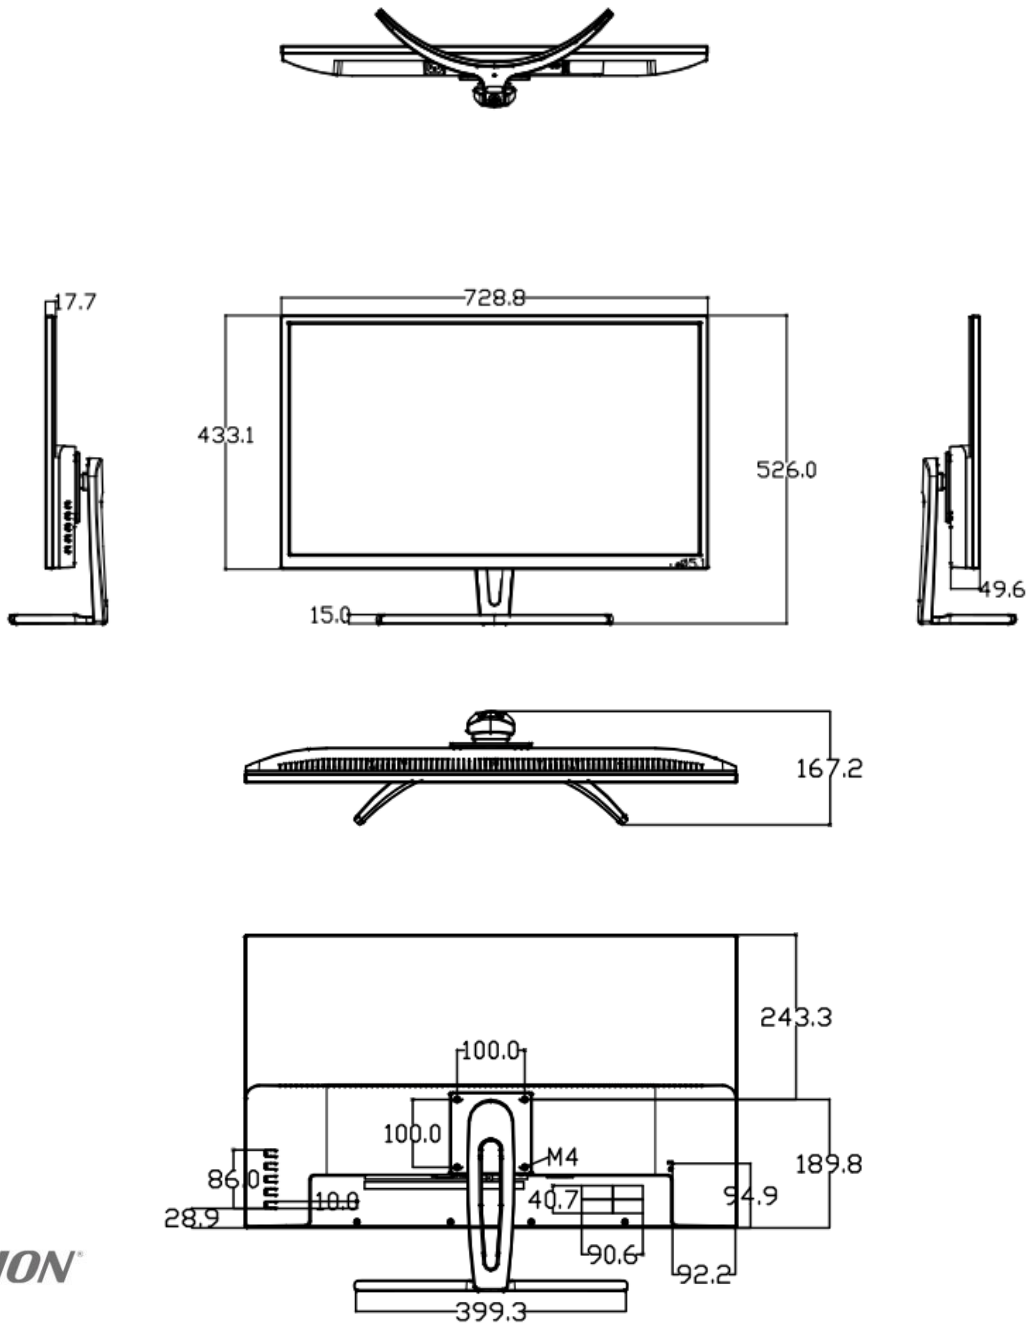

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com