

iDS-7700NXI-I4/16P/X (C) DeepinMind Series NVR

Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 16-ch perimeter protection
- Up to 8-ch facial recognition for video stream, or up to 16-ch facial recognition for face picture
- Up to 8-ch video structuralization
- Up to 8-ch throwing objects from building
- Up to 16/32-ch IP cameras can be connected
- Up to 16-ch 1080p decoding capability



Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- Up to 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR (Automatic Number-Plate Recognition), and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm




Network & Ethernet Access

- 16 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

Typical Application


Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize list alarm and stranger alarm via face picture library. Search target people by picture and name features.

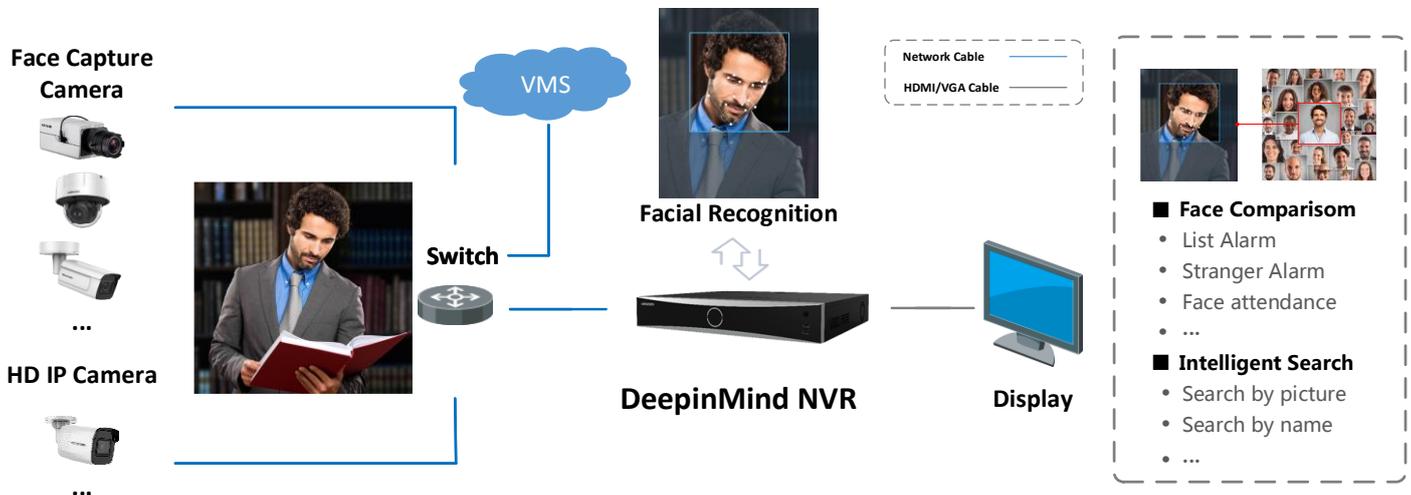


Perimeter Protection

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

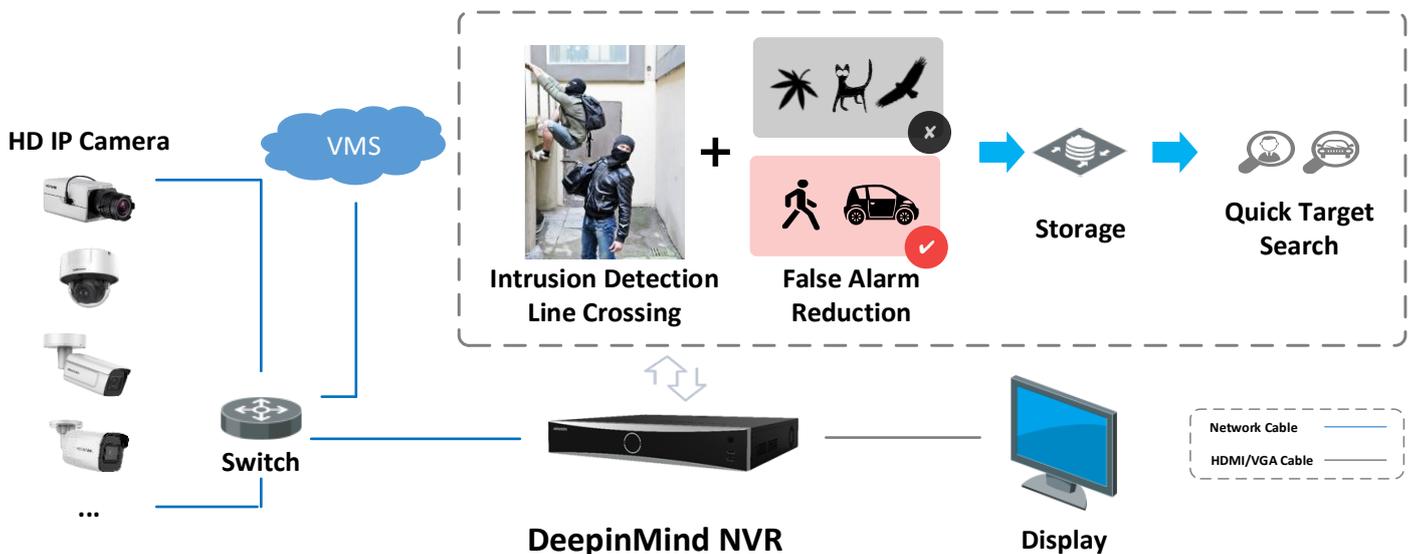

Video Structuralization

Extracting the face picture, human body and vehicle features from live videos, which is used for the tracking and retrieval of human and vehicles.

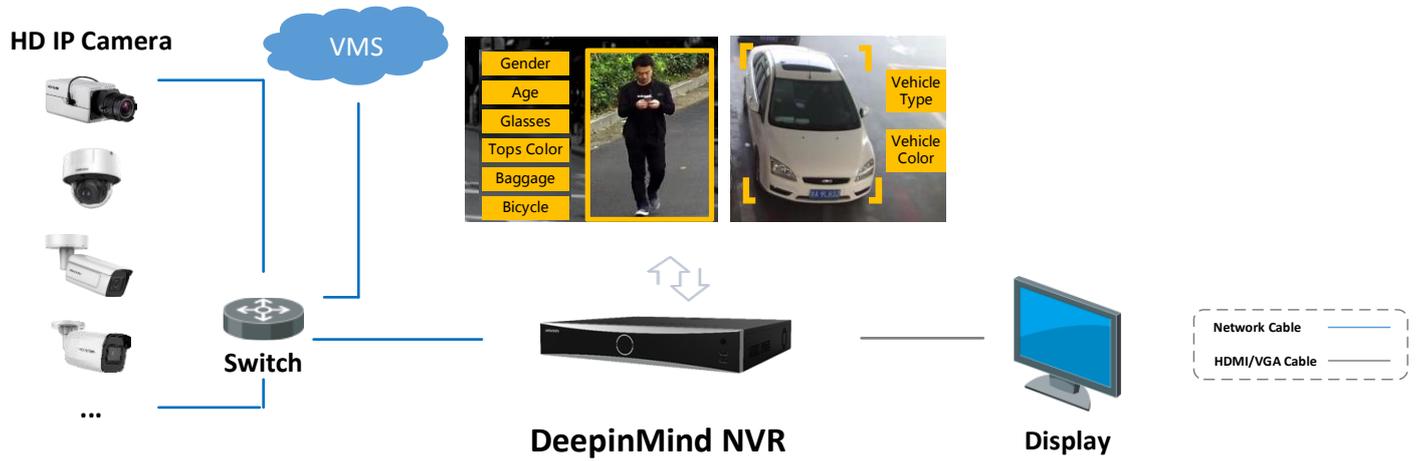

Specification

Model	iDS-7716NXI-I4/16P/X	iDS-7732NXI-I4/16P/X
Facial Recognition¹		
Facial detection and analytics	Face picture comparison, human face capture, face picture search	
Face picture library	Up to 16 face picture libraries, with up to 100,000 face pictures in total (each picture ≤ 4 MB, total capacity ≤ 20 GB)	
Face picture comparison	16-ch face picture comparison alarm	
Performance of facial detection and analytics	8-ch 8 MP human face capture (HD network camera, up to 8 MP, H.264/H.265)	
Perimeter Protection¹		
Human/vehicle analysis	Up to 16-ch 4 MP (HD network camera, up to 8 MP, H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm	
Video Structuralization¹		
Structured analysis	Up to 8-ch 2 MP (HD network camera, up to 8 MP, H.264/H.265) live video structuralization analysis	
Face picture library	Up to 16 face picture libraries, with up to 100,000 face pictures in total	
Face picture comparison	8-ch face picture comparison alarm	
Throwing Objects from Building¹		
Capability	Up to 8-ch 2 MP (H.264/H.265) video analysis	
Video and Audio		
IP video input	16-ch	32-ch
	Up to 12 MP resolution	
Incoming bandwidth	320 Mbps	
Outgoing bandwidth	256 Mbps	
HDMI1 output	1-ch, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
HDMI2 output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Video output mode	HDMI1/VGA simultaneous output, HDMI2/VGA independent output	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
Audio output	1-ch, RCA (Linear, 1 KΩ)	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
Decoding		
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4	
Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous playback	16-ch	
Capability	16-ch@1080p (30 fps)	
Dual stream recording	Support	
Stream type	Video, Video & Audio	

Audio compression	G.711ulaw/G.711alaw/G.722/G.726/MP2L2
Network	
Remote connections	128
Network protocol	TCP/IP, DHCP, IPv4, IPv6, Hik-Connect, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
PoE	
Interface	16, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Supported standard	IEEE 802.3 af/at
Auxiliary interface	
Serial port	RS-485 (half-duplex), RS-232, keyboard
SATA	4 SATA interfaces
Capacity	Up to 10 TB capacity for each disk
eSATA	1 eSATA interface
Alarm in/out	16/8
USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power supply	100 to 240 VAC, 50 to 60 Hz
Consumption (without HDD and PoE off)	≤ 30 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimension (W × D × H)	445 × 400 × 75 mm (17.5" × 15.7" × 3.0")
Weight (without HDD)	≤ 5 kg (11 lb)
Certification	
Obtained Certification	CE, FCC, UL, CB, WEEE, BIS, IC, RCM, KC, LOA
CE	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
FCC	Part 15 Subpart B, ANSI C63.4-2014

1: The device has four engine modes: facial recognition, perimeter protection, video structuralization, and throwing objects from building, among which no more two modes can be enabled at the same time. When two modes are enabled, capacity is as follows.


Perimeter protection: 8-ch

Video structuralization: 2-ch live video structuralization analysis and 4-ch face picture comparison alarm

Facial recognition: 4-ch face capture and 8-ch face picture comparison alarm


Throwing objects from building: 4-ch

Dimension

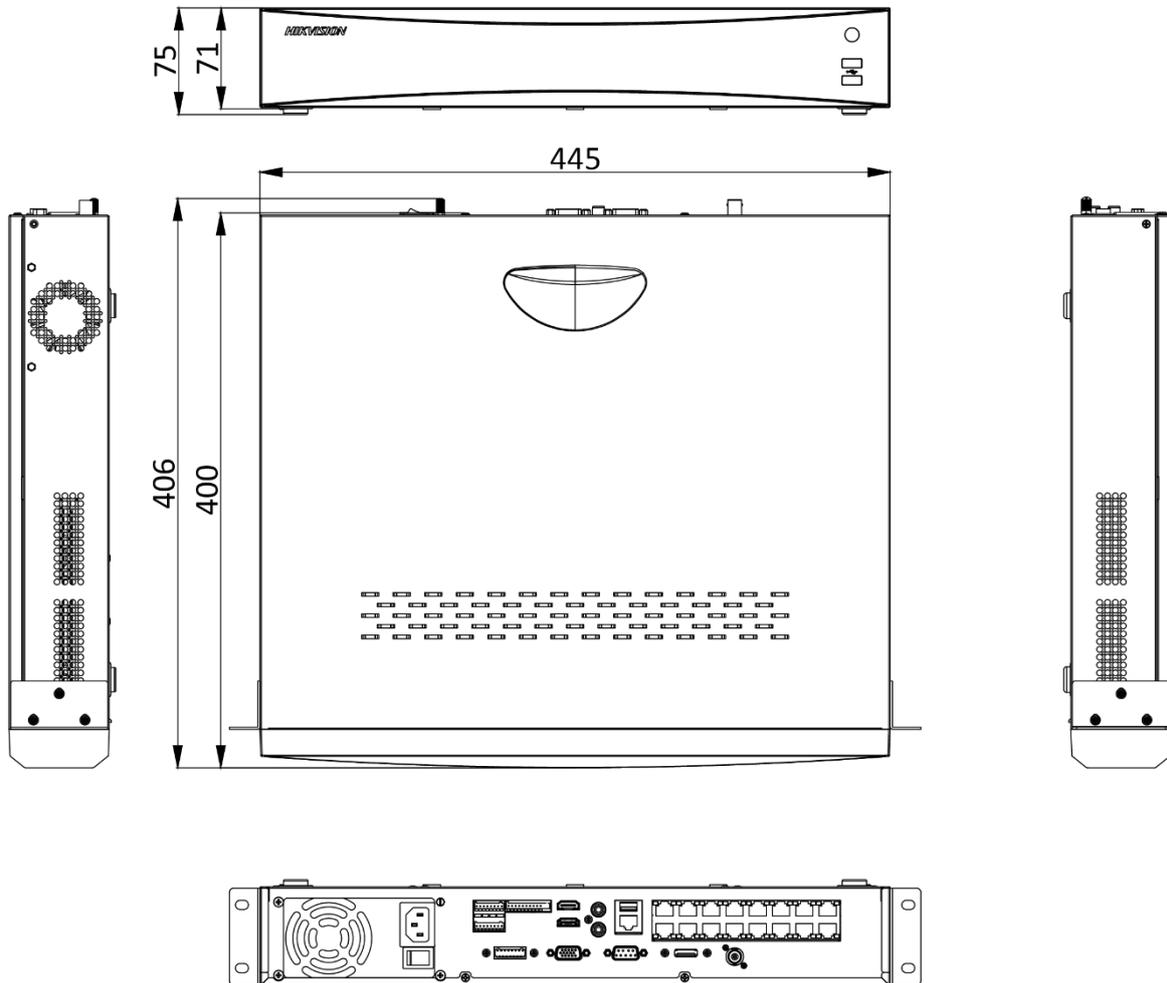

scale/1:1;Unit/mm

Physical Interface

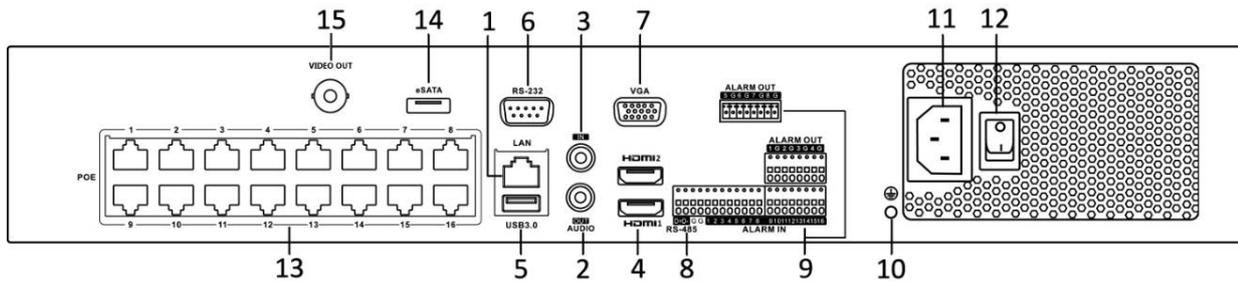

No.	Description	No.	Description
1	LAN Interface	9	Controller Port, Alarm In/Alarm Out
2	AUDIO OUT	10	GND
3	AUDIO IN	11	100 to 240 VAC Power Supply
4	HDMI1 and HDMI2 Interfaces	12	Power Switch
5	USB 3.0 Interface	13	Network Interfaces with PoE function
6	RS-232 Serial Interface	14	eSATA Interface
7	VGA Output (DB9 Connector)	15	VIDEO OUT
8	RS-485 Serial Interface		

Available Model

iDS-7716NXI-I4/16P/X (C), iDS-7732NXI-I4/16P/X (C)

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvisic

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

04601102020218