

## iDS-9600NXI-I8/8F(B) DeepinMind Series NVR



### Features and Functions

#### Face Detection and Analysis

- Powerful face pictures library management
- Face pictures comparison and alarm linkage actions
- Search by picture supported
- More precise face recognition and analytics based on deep learning algorithm

#### Video Input and Transmission

- Up to 16/32/64-ch IP camera input for iDS-9616/9632/9664NXI-I8/8F(B)
- Connectable to the third-party network cameras

#### HD Video Output and Decoding

- Supports H.265+ decoding format
- Up to 16-ch decoding at 1080p resolution
- HDMI1/VGA1 and HDMI2/VGA2 outputs provided
- HDMI1 output at up to 4K (4096 × 2160) resolution

#### Storage and Playback

- Full channel recording at up to 12 MP resolution
- Up to 10 TB capacity for each HDD
- HDD hot swap with RAID0, RAID1, RAID5, RAID6 and RAID10 storage scheme configurable
- 16-ch synchronous playback at 1080p resolution

#### VCA & POS Function

- Supports multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports VCA search for fire/ship/temperature/temperature difference detection triggered video files
- POS information overlay on live view and playback
- POS triggered recording and alarm

#### Professional and Reliable

- ANR technology to enhance the storage reliability when the network is disconnected
- Configurable normal or hot spare working mode to constitute an N+1 hot spare system

#### Network & Ethernet Access


- Hik-Connect for easy network management
- 2 × RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface



## Specifications

Model		iDS-9616NXI-I8/8F(B)	iDS-9632NXI-I8/8F(B)	iDS-9664NXI-I8/8F(B)
Face detection and analytics	Face picture library	32 libraries 100,000 pictures		
	Face picture comparison alarm	16-ch face pictures comparison alarm, Alarm linkage actions: recording, audio warning, notify surveillance center, send email		
	Face picture search	Search by picture is supported		
	Performance of facial detection and analytics	8-ch human face capture (HD network camera, up to 4 MP, H.264/H.265)		
Human/Vehicle analysis	False alarm reduction	Up to 16-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm		
Video/audio input	IP video input	16-ch	32-ch	64-ch
	Incoming/outgoing bandwidth	320 Mbps/256 Mbps		
	Incoming/outgoing bandwidth (RAID mode)	200 Mbps/200 Mbps		
Video/audio output	Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF /2CIF/CIF/QCIF		
	CVBS output (Optional)	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
	VGA1 /HDMI1 output resolution	VGA1: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	VGA2 /HDMI2 output resolution	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Audio output	2-ch, RCA (Linear, 1 KΩ)		
Decoding	Decoding format	H.265/H.265+/H.264/H.264+/MPEG4		
	Live view/playback resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF /2CIF/CIF/QCIF		
	Synchronous playback	16-ch		
	Capability	16-ch @ 1080p		
Hard disk	SATA	8 SATA interfaces		
	eSATA	1 eSATA interface		
	Capacity	Up to 10 TB capacity for each HDD		
Disk array	Array type	RAID0, RAID1, RAID5, RAID6, RAID10		
External interface	Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)		
	Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
	Serial interface	RS-232; RS-485; Keyboard		
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0		
	Alarm in/out	16/4 (16/8 is optional)		
General	Power supply	100 to 240 VAC, 50 to 60 Hz		
	Total power	200 W		
	Consumption (without hard disk)	≤ 70 W		
	Working temperature	-10 to +55° C (+14 to +131° F)		
	Working humidity	10 to 90 %		
	Dimensions (W × D × H)	445 × 470 × 90 mm (17.5" × 18.5" × 3.5")		
	Weight (without hard disk)	≤ 10 kg (22 lb)		

## Physical Interfaces

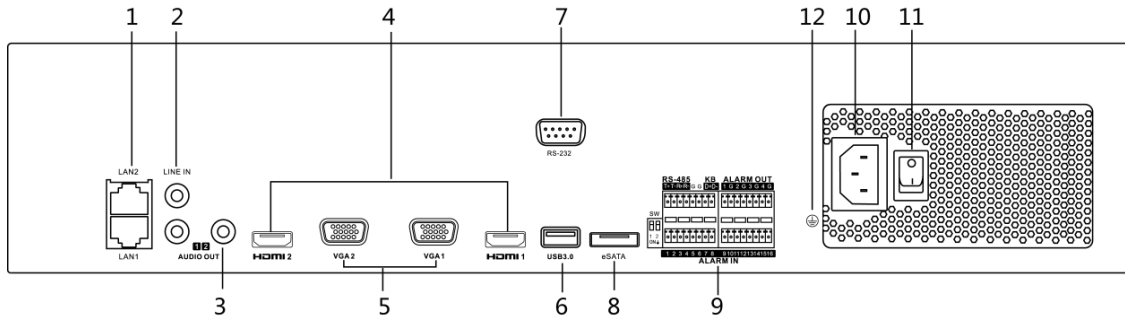

Index	Description	Index	Description
1	LAN1/LAN2 Interface	7	RS-232 Interface
2	LINE IN	8	eSATA Interface
3	AUDIO OUT	9	Alarm In/Alarm Out
4	HDMI1/HDMI2 Interface	10	100 to 240 VAC power supply
5	VGA1/VGA2 Interface	11	Power Switch
6	USB 3.0 Interface	12	GND

## Available Models

iDS-9616NXI-I8/8F(B), iDS-9632NXI-I8/8F(B), iDS-9664NXI-I8/8F(B)

Distributed by



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com