

## iDS-96064NXI-I16(B) DeepinMind Series NVR

### Key Feature

- Up to 12-ch facial recognition for video stream, or up to 24-ch facial recognition for face picture
- Up to 12-ch video structuralization
- Up to 64 libraries and 500,000 face pictures
- Up to 48-ch human and vehicle recognition of perimeter protection to reduce false alarms
- Up to 64-ch network camera inputs
- Up to 400 Mbps incoming and outgoing
- Up to 20-ch@1080p decoding capability
- 16 SATA interfaces (up to 10 TB capacity for each HDD)
- HDD hot swapping with RAID 0/1/5/6/10
- Redundant power supply



### Profession and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Adopt professional embedded hardware (Intel® processor) and software, and pioneering dual-OS design to ensure the reliability of system running.
- Redundant power supply ensures system stability
- ANR (Automatic Network Replenishment) technology enhances storage reliability when network exception occurs

### Video and Storage

- Compatible with third-party network cameras, such as ACTI, Arecont, AXIS, Bosch, Brickcom, Canon, ONVIF, PANASONIC, Pelco, SAMSUNG, SANYO, SONY, Vivotek and ZAVIO
- 16 SATA interfaces (up to 10 TB capacity per HDD) and 1 eSATA interface are provided for HDD connection



## Network & Ethernet Access

- 4 self-adaptive 10M/100M/1000M Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

## Live view and Playback

- Up to 20-ch@1080p decoding for live view
- Up to 16-ch synchronous playback at 1080p resolution
- Dual 4K (4096 × 2160) HDMI outputs


## Application and Management

- Centralized management of network cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Configurable network camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- Deep learning based video analytics for false alarm reduction, facial recognition and face picture comparison
- VCA search for facial detection, false alarm reduction, people counting and heat map

## Typical Application


### Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize list alarm and stranger alarm via face picture library. Search target people by picture and name features.

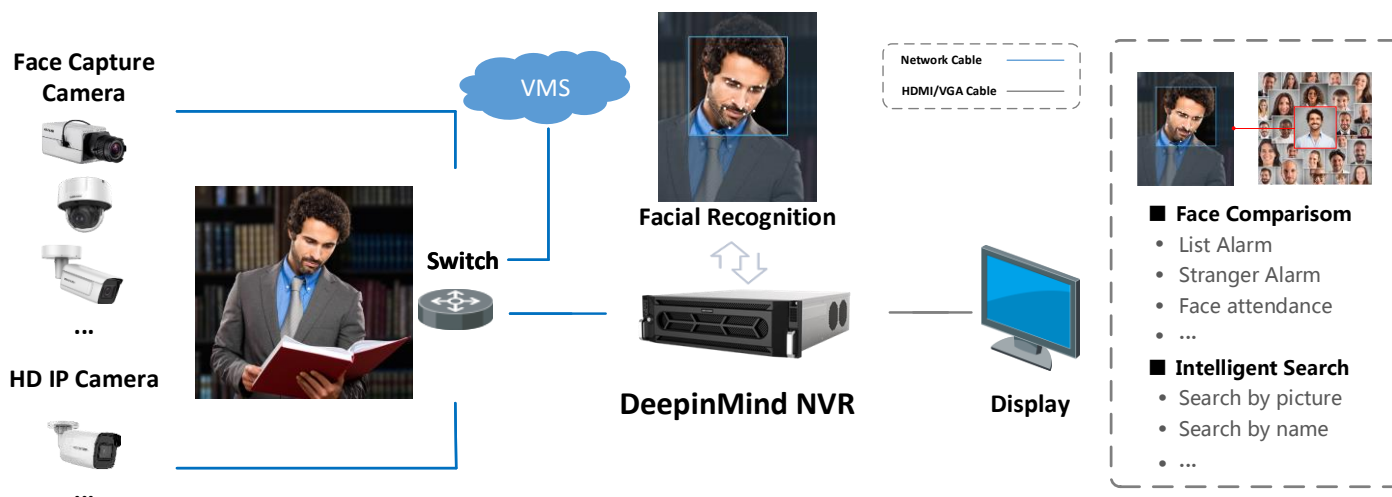


### Perimeter Protection

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

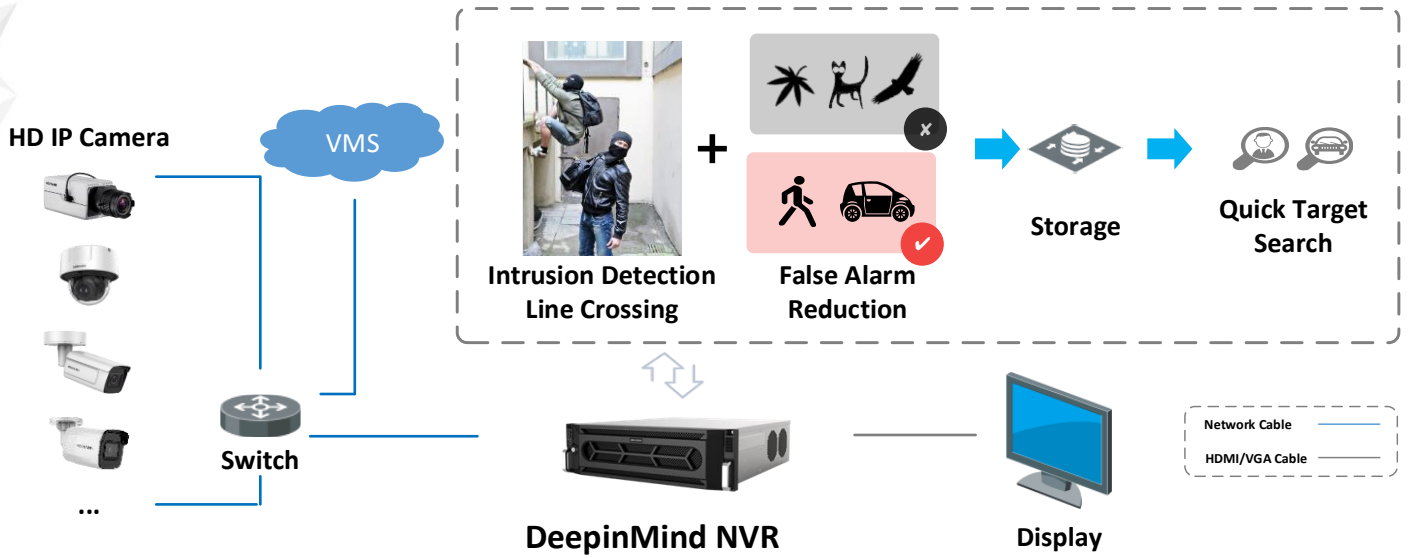

### Video Structuralization

Extracting the face picture, human body and vehicle features from live videos, which is used for the tracking and retrieval of human and vehicles.





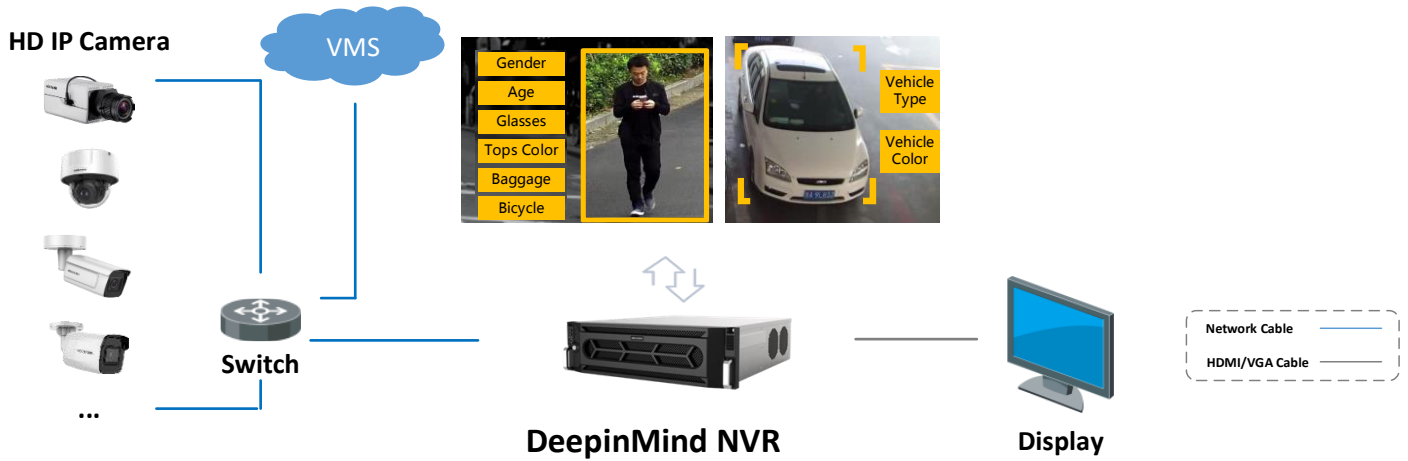


## Specification

<b>Model</b>	<b>iDS-96064NXI-I16(B)</b>
<b>Facial Recognition</b>	
<b>Facial detection and analytics</b>	Face picture comparison, human face capture, face picture search
<b>Face picture library</b>	Up to 64 face picture libraries, with up to 500,000 face pictures in total
<b>Face picture comparison</b>	24-ch face picture comparison alarm
<b>Performance of facial detection and analytics</b>	12-ch 2 MP human face capture (HD network camera, up to 8 MP, H.264/H.265)
<b>Perimeter Protection</b>	
<b>Human/Vehicle analysis</b>	Up to 48-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm
<b>Video Structuralization</b>	
<b>Structured analysis</b>	Up to 12-ch 2 MP (H.264/H.265) video structured analysis
<b>Video and Audio</b>	
<b>IP video input</b>	64-ch
	Up to 12 MP resolution
<b>Incoming bandwidth</b>	400 Mbps
<b>Outgoing bandwidth</b>	400 Mbps
<b>HDMI 1 output</b>	4K (4096 × 2160)/30Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>HDMI 2 output</b>	4K (4096 × 2160)/30Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>VGA output</b>	1-ch, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>LCD output</b>	N/A (7-inch LCD optional)
<b>Audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)
<b>Audio output</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)
<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 k Ω)
<b>Decoding</b>	
<b>Decoding format</b>	H.265+/H.265/H.264+/H.264/MJPEG/MPEG4
<b>Recording resolution</b>	12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p /VGA/4CIF/DCIF/2CIF/CIF/QCIF
<b>Synchronous playback</b>	16-ch
<b>Capability</b>	5-ch@8 MP(30 fps)/10-ch@4 MP(30 fps)/20-ch@1080p(30 fps)/40-ch@720p(30 fps)
<b>Dual-stream recording</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711ulaw/G.711alaw/G.722/G.726/MP2L2
<b>Network</b>	
<b>Remote connections</b>	128
<b>Network protocol</b>	IPv6, HTTP, HTTPS, UPnP, SNMP, NTP, SADP, SMTP, NFS, iSCSI, PPPoE, DDNS
<b>Network interface</b>	4, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>Network mode</b>	Net Fault-Tolerance, Load Balance, Multi-address
<b>RAID</b>	


<b>RAID Type</b>	RAID0, RAID1, RAID5, RAID6, and RAID10 (at least 4 TB for each HDD)
<b>Auxiliary interface</b>	
<b>Fiber interface</b>	N/A (optional to support)
<b>Serial port</b>	RS-232; RS-485 (full-duplex); Keyboard
<b>SATA</b>	16 SATA interfaces supporting hot-plug
<b>Capacity</b>	Up to 10 TB capacity for each disk
<b>eSATA</b>	1 eSATA interface
<b>MiniSAS</b>	N/A (2 miniSAS interfaces optional)
<b>Alarm in/out</b>	16/8
<b>USB interface</b>	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0
<b>Extension board</b>	N/A (optional to support)
<b>General</b>	
<b>Processor</b>	Dual-Core Intel® Core® I3
<b>Memory</b>	8 GB
<b>Power supply</b>	100 to 240 VAC, 50 to 60Hz, redundant power supply
<b>Fan</b>	Dual ball bearing fan; Speed adjustable; Hot-plug
<b>Consumption (without HDD)</b>	≤ 140 W
<b>Working temperature</b>	0 °C to 50 °C (32 °F to 122 °F)
<b>Working humidity</b>	10% to 90%
<b>Dimension (W × D × H)</b>	446 × 495 × 133 mm (17.6 × 19.5 × 5.2 inch)
<b>Weight (without HDD)</b>	≤ 20 kg (44 lb)
<b>Certification</b>	
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

# Dimension

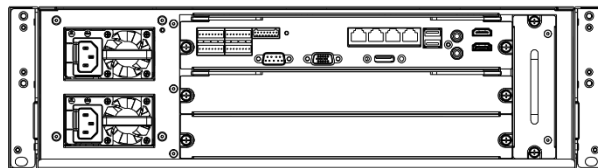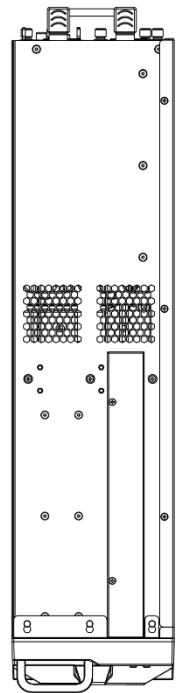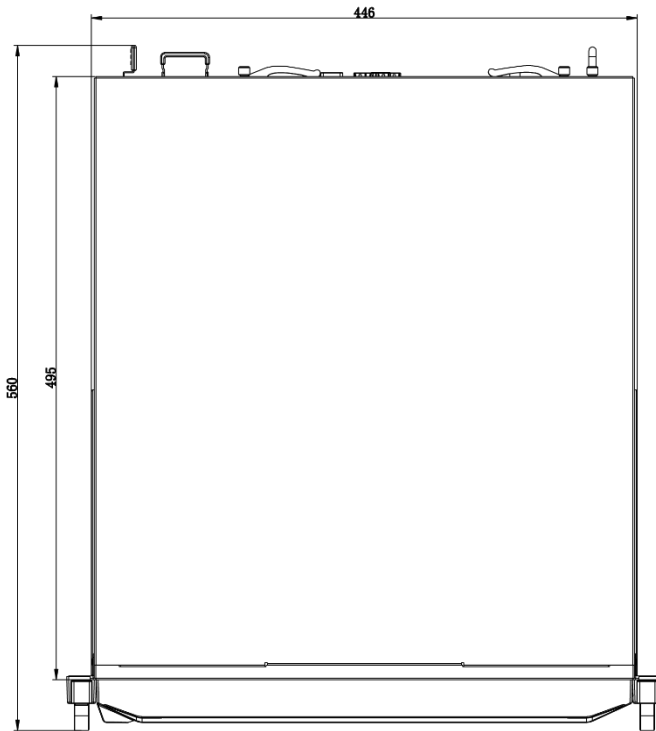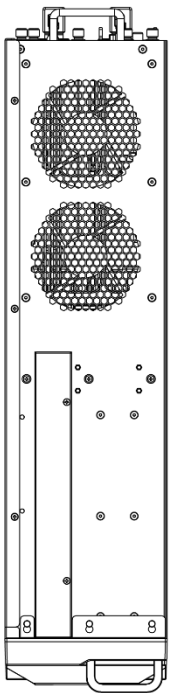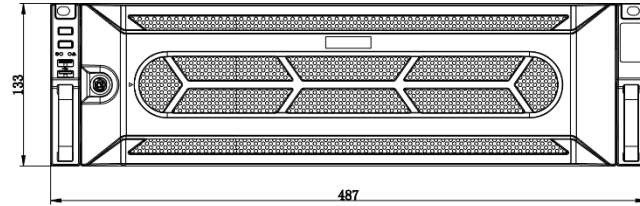

Unit: mm

## Physical Interface

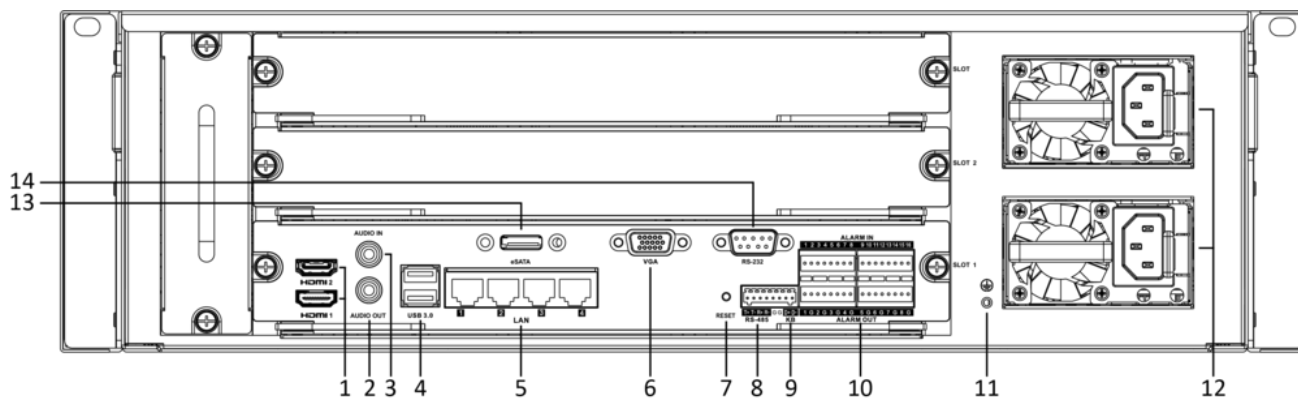

No.	Description	No.	Description
1	HDMI 1/HDMI 2 Interface	8	RS-485 Interface
2	AUDIO OUT, RCA Connector	9	Keyboard Interface
3	AUDIO IN, RCA Connector	10	ALARM IN/OUT
4	USB 3.0 Interface	11	Ground
5	LAN Network Interface	12	100 to 240 VAC Power Supply
6	VGA Interface	13	RS-232 Interface
7	Reset Button	14	eSATA Interface

## Available Model

iDS-96064NXI-I16(B)

Distributed by



04222002001013

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com