

## DS-2ZCN3008(C) 30× 3MP 1/2.8" ICR Day/Night Zoom Camera



Hikvision DS-2ZCN3008(C) 3MP ICR Day/Night Network Zoom Camera adopts 1/2.8" progressive scan CMOS chip. With the 30× optical zoom lens, the camera module offers more details over expansive areas.

This series of cameras can be widely used for wide ranges of high-definition, such as the rivers, forests, roads, railways, airports, ports, squares, parks, scenic spots, stations and large venues, etc.

- 3MP 1/2.8" progressive scan CMOS
- Up to 2048×1536 resolution
- 30× optical zoom; focal length 4.5mm to 135mm
- Min. illumination: Color: 0.05Lux @(F1.6, AGC ON), B/W: 0.01Lux @(F1.6, AGC ON)
- Zoom speed: 3s
- IR cut filter with auto switch
- 3D DNR, low bitrate, digital WDR
- Small size and low power consumption
- Easy to connect to speed domes and PTZ cameras



## Specifications

<b>Camera Module</b>	
Model	DS-2ZCN3008(C), 30× 3MP 1/2.8" COMS ICR Day/Night Network Zoom Camera
Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NSTC
Video Output	Network Encoding Output
Resolution	50HZ: 25fps (2048×1536), 60HZ: 30fps (2048×1536) 50HZ: 25fps (1920×1080), 60HZ: 30fps (1920×1080) 50HZ: 25fps (1280×960), 60HZ: 30fps (1280×960) 50HZ: 25fps (1280×720), 60HZ: 30fps (1280×720)
Min. Illumination	Color: 0.05Lux @ (F1.6, AGC ON) B/W: 0.01Lux @ (F1.6, AGC ON)
S/N ratio	> 52dB (AGC OFF)
<b>Lens</b>	
Focal Length	4.5mm to 135mm, 30× optical
Aperture Range	F1.6 to F4.4
Angle of View	57.2° to 3.5° (Wide-Tele)
Min. Working Distance	10mm to 1500mm (Wide-Tele)
Zoom Speed	Approx. 3s (Optical, Wide-Tele)
Day & Night	ICR filter
<b>Function</b>	
Focus Mode	Auto/Manual/One Touch
Exposure Mode	Auto/Aperture Priority/Shutter Priority/Manual
Day & Night Mode	Auto/Color/BW/Scheduled-Switch/Triggered by Alarm Input
Shutter Time	1/1 sec to 1/30,000 sec
White Balance	Auto 1/Auto 2/Indoor/Outdoor/Manual/Sodium Lamp/Fluorescent Lamp
BLC	OFF, Left/Right, Up/Down or Center
Gain	16 levels adjustable
Dead Pixel Compensation	Support
WDR	ON/OFF
DNR	3D DNR
Lens Initialization	Internal
Image Setting	Saturation, Brightness, Contrast, Sharpness adjustable
Digital Zoom	12×
<b>Network</b>	
Video Compression	H.264/MJPEG
Bitrate	32kbps to 12Mbps
Audio Compression	G.722.1, G.711-a law, G.711-u law, MP2L2, G.726
Alarm	Motion Detection, Tampering Alarm, Storage Full, Storage Exception, Audio Exception Detection, Line Crossing Detection, Intrusion Detection
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, FTP, 802.1x, QoS, HTTPS, IPv6 (SIP, SRTP optional)
Standard	ONVIF, PSIA, CGI, ISAPI
Outward Interface	Network Interface, RS485, Alarm In/Out, Line In/Out, CVBS, SDHC
Security	Password Protection, Multiple User Access Control
Communication	RS485Interface, Pelco Protocol
Other	Double Streams, Heartbeat



**General**

Power Supply	DC12V $\pm$ 10%
Working Environment	Temperature: -10 °C to 60 °C (14°F to 140°F) Humidity: $\leq$ 90%
Power Consumption	Static: 2.5W Dynamic: 4.5W
Dimension	74.3mm $\times$ 81.1mm $\times$ 142mm (2.93" $\times$ 3.19" $\times$ 5.59")
Weight	320g (0.71lb)

## Order Model

DS-2ZCN3008(C)

## Dimensions

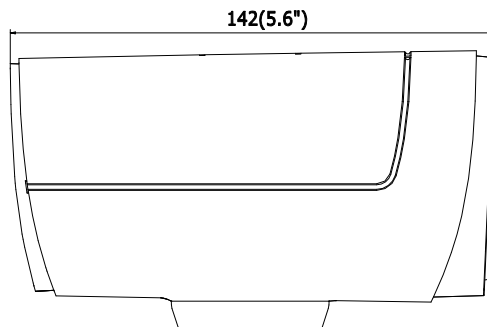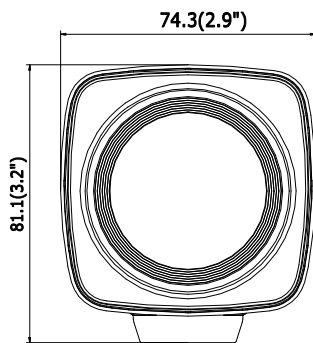

Uφ=2A:  
①①

## Accessory



DS-1292ZJ



DS-1293ZJ



DS-1331HZ



DS-1332HZ

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com