

DS-2CE16D0T-EXIF 2 MP Fixed Mini Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

▪ Specification

| Camera | |
|--------------------------|---|
| Model | DS-2CE16D0T-EXIF |
| Product Name | 2MP Outdoor EXIR Fixed Mini Bullet Camera |
| Image Sensor | 2 MP CMOS |
| Signal System | PAL/NTSC |
| Resolution | 1920 (H) × 1080 (V) |
| Frame Rate | TVI: 1080p@25fps/30fps AHD: 1080p@25fps/30fps CVI: 1080p@25fps/30fps CVBS: PAL/NTSC |
| Min. Illumination | 0.02 Lux @ (F1.2, AGC ON), 0 Lux with IR |
| Shutter Time | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s |
| Lens | 2.8 mm, 3.6 mm Fixed Lens |
| Field of View | 2.8 mm, horizontal FOV: 96.5°, vertical FOV: 48.9°, diagonal FOV: 120.5° 3.6 mm, horizontal FOV: 76.9°, vertical FOV: 40.6°, diagonal FOV: 92.0° |
| Lens Mount | M12 |
| Day & Night | IR Cut Filter |
| WDR (Wide Dynamic Range) | Digital WDR |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° |
| Image | |
| Image Mode | STD/HIGH-SAT |
| AGC | Yes |
| Day/Night Mode | Auto/Color/BW (Black and White) |
| White Balance | Auto |
| AE (Auto Exposure) Mode | DWDR, BLC, Global |
| Noise Reduction | 2D DNR |
| Language | English |
| Function | Brightness, Mirror, Smart IR, Sharpness |
| Interface | |
| Video Output | Switchable TVI/AHD/CVI/CVBS |
| General | |
| Operating Conditions | -40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing) |
| Power Supply | 12 VDC ± 25% |
| Consumption | Max. 3.3 W |
| Protection Level | IP67 |
| Material | Metal |
| IR Range | Up to 20 m |
| Communication | HIKVISION-C |
| Dimension | 138.8 mm × 60.9 mm × 57.9 mm (5.465" × 2.389" 2.278") |
| Weight | Approx. 260 g (0.57 lb.) |

▪ Available Model

DS-2CE16D0T-EXIF(2.8mm)


DS-2CE16D0T-EXIF(3.6mm)

DS-2CE16D0T-EXIF(2.8mm)(MENA)

DS-2CE16D0T-EXIF(3.6mm)(MENA)

DS-2CE16D0T-EXIF(3.6mm)(Chicony)

▪ Dimension

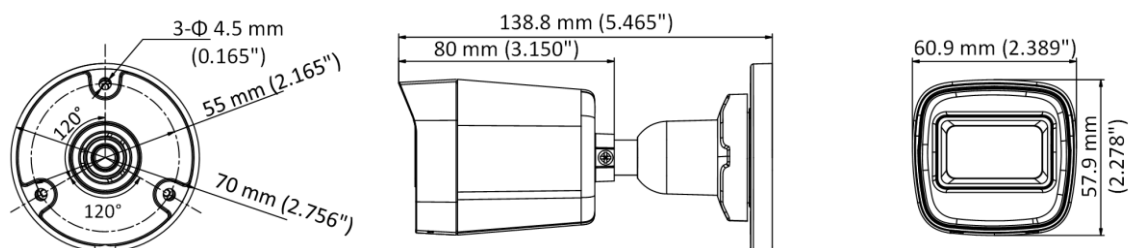

▪ Accessory

▪ Optional

DS-1280ZJ-XS
Junction Box



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

