

## DS-C10S-SXXT Series Video Wall Controller









### Features and Functions

- A signal source can be displayed on the  $M \times N$  ( $M \geq 1, N \geq 1$ ) display units.
- Multiple signal sources are supported, including VGA, DVI, HDMI, BNC, YpbPr, DP, HDBaseT. Up to  $4096 \times 2160@30$  Hz resolution is supported for HDMI, DP and HDBaseT signal inputs.
- Distributed network signal sources configurable to raise the signal source capacity and transmission distance. And low latency mode configurable for the distributed network signal sources to optimize the decoding delay to be less than 200 ms.
- Video upscaling configurable to display video with higher image quality.
- Live view in the roaming window and live view list.
- Fluent video output without frame extraction to guarantee the lossless output of 60 frames.
- An enhanced network decoding board supports H.264 and H.265 compression standard and can display network signal of 2-ch@8.0 MP, 2-ch@6.0 MP, 2-ch@5.0 MP, 8-ch@1080p, 16-ch@720p and 32-ch@D1 and local video files.
- Supports 1/4/9/16 window division modes and full-screen switch of the window.
- The window can be kept sticking on top without being affected by the operations of other windows and kept open without being affected by the scene or plan configuration.
- Up to 6 image layers can be displayed on one screen, including one virtual LED image layer and a background layer.
- The LED font size, background color and moving mode are adjustable. The resolution of background layer is up to  $8192 \times 8192$ .
- Tile mode available and the video layers can be extended to 8 layers in tile mode.
- The tile mode can be saved in the scene.
- Video wall mirror configurable to mirror the content of one video wall area to another area.
- Users have the permission to manage the signal sources and video wall.
- Built-in matrix feature for opening a signal source on several windows simultaneously.
- Matrix protocol of ZT1.0, ZT2.0, Extron, Creator and HIK\_CVBS\_96P supported and up to 4 matrixes with maximum 512 input channels of each matrix supported.
- Supports crossing-window video roaming.
- Supports adjusting the output to match the virtual output of client software with real output of controller.
- Up to 16 devices can be managed and up to 5 virtual video walls can be displayed by a client server.
- Remote control via iOS client server, Android client server and IE browser.
- Supports opening windows to display video signal, with the window position and size adjustable.
- Supports SADP searching active IP address and resetting the password of administrator.
- The fan speed of the chassis is self-adaptive to the temperature.
- Supports both the LED screen mode with small pixel pitch and the normal screen mode.
- Supports custom resolution access of DP, DVI and HDMI signal sources and characters overlap.
- Supports remote interaction.
- Compatible with wireless projection.




## Specifications

DS-C10S-SXXT Series				
Model		DS-C10S-S09T	DS-C10S-S11T	DS-C10S-S22T
Hardware	Slot Number	9 (6 × Input, 3 × Output)	11 (6 × Input, 5 × Output)	22 (12 × Input, 10 × Output)
Motherboard (DS-C10S-MSUT)	Network Interface	1, 10M/100M/1000M self-adaptive Ethernet interface		
	USB Interface	1 × USB 2.0 (Reserved)		
	RS-232 Serial Interface	2		
Network Decoding Board (DS-C10S-SIUT)	Decoding Performance	2-ch@8 MP (low frame rate), 2-ch@6 MP, 2-ch@5 MP, 8-ch@1080p, 16-ch@720p, or 32-ch@D1		
DVI Input Board (DS-C10S-DI4T)	Interface	4 × DVI interface		
	DVI Input Resolution	Custom resolution, 720p@50 Hz, 720p@60 Hz, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1080p@50 Hz, 1080p@60 Hz, UXGA@60 Hz, 1920 × 1200@60 Hz		
VGA Input Board (DS-C10S-VI4T)	Interface	4 × VGA interface		
	RGB Input Resolution	720p@60 Hz, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1080p@60 Hz, UXGA@60 Hz, 1920 × 1200@60 Hz  <b>NOTE</b> The VGA to DVI adaptor is required for VGA input.		
HDMI Input Board (DS-C10S-HI4T)	Interface	4 × HDMI interface		
	DVI Input Resolution	Custom resolution, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1920 × 1200@60 Hz, 3840 × 2160@30 Hz, 4096 × 2160@30 Hz  <b>NOTE</b> Only No. 1 and 3 interfaces support 3840 × 2160@30 Hz and 4096 × 2160@30 Hz resolution. The 4096 × 2160@30 Hz resolution is not supported by EDID, and can only be output by video card.		
BNC Input Board (DS-C10S-BI8T)	Interface	8 × BNC interface, PAL/NTSC self-adaptive		
	BNC Input Resolution	WD1, D1		
YPbPr Input Board (DS-C10S-YI4T)	Input	4 × DVI interface		
	DVI Input Resolution	576p50, 480p60, 720p50, 720p60, 1080p50, 1080p60  <b>NOTE</b> The DVI to YPbPr adaptor is required for YPbPr input.		
DP Input Board	Interface	4 × DP interface		

(DS-C10S-DPI4T)	DP Input Resolution	<p>Custom resolution, 1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1920 × 1200@60 Hz, 3840 × 2160@30 Hz, 4096 × 2160@30 Hz</p> <p> <b>NOTE</b> Only No. 1 and 3 interfaces support 3840 × 2160@30 Hz and 4096 × 2160@30 Hz resolution.</p> <p>The 4096 × 2160@30 Hz resolution is not supported by EDID, and can only be output by video card.</p>		
HDBaseT Input Board (DS-C10S-HDBI4T)	Interface	4 × HDBaseT interface		
	HDBaseT Input Resolution	<p>1024 × 768@60 Hz, 1024 × 768@75 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1280 × 1024@75 Hz, 1366 × 768@60 Hz, 1400 × 1050@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1920 × 1200@60 Hz, 3840 × 2160@30 Hz, 4096 × 2160@30 Hz</p> <p> <b>NOTE</b> Only No. 1 and 3 interfaces support 3840 × 2160@30 Hz and 4096 × 2160@30 Hz resolution.</p>		
DVI Output Board (DS-C10S-DO4T)	Interface	4 × DVI interface		
	DVI Output Resolution	1024 × 768@60 Hz, 1024 × 768@75 Hz, 1360 × 768@60 Hz, 1400 × 1050@60 Hz, 1920 × 1200@60 Hz, 720p@60 Hz, 1080p@60 Hz		
VGA Output Board (DS-C10S-VO4T)	Interface	4 × VGA interface		
	RGB Output Resolution	<p>1024 × 768@60 Hz, 1024 × 768@75 Hz, 1360 × 768@60 Hz, 1400 × 1050@60 Hz, 1920 × 1200@60 Hz, 720p@60 Hz, 1080p@60 Hz</p> <p> <b>NOTE</b> The DVI to VGA adaptor is required for VGA output.</p>		
HDMI Output Board (DS-C10S-HO4T)	Interface	4 × HDMI interface		
	DVI Output Resolution	<p>1024 × 768@60 Hz, 1024 × 768@75 Hz, 1360 × 768@60 Hz, 1400 × 1050@60 Hz, 1920 × 1200@60 Hz, 720p@60 Hz, 1080p@60 Hz</p> <p> <b>NOTE</b> The DVI to HDMI adaptor is required for HDMI output.</p>		
Others	Power Supply	100 to 240 VAC, 50/60 Hz		
		A build-in power supply	Build-in redundant power supply	
	Consumption	≤ 250 W (full-loaded)	≤ 450 W (full-loaded)	
	Working Temperature	+0° C to +50° C (+32° F to +122° F )		
	Working Humidity	10 to 90% (Non-condensing)		
	Chassis	Standard 4U chassis	Standard 8U chassis	
	Dimension (D × H × W)	352 × 177 × 442.4 mm (13.9 × 7 × 17.4 inch)	352 × 354 × 442.4 mm (13.9 × 13.9 × 17.4 inch)	
	Weight	≤ 20 kg (full-loaded)	≤ 35 kg (full-loaded)	


## Physical Interfaces

Front Panel (Take the front and rear panel of DS-C10S-S09T as an example.)

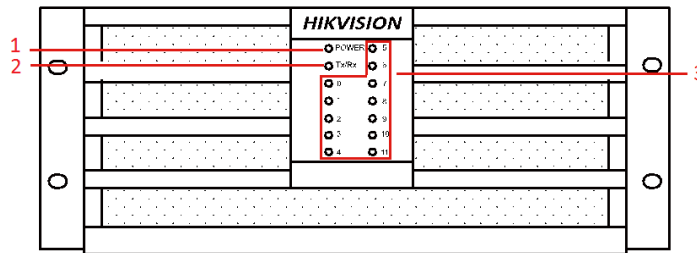

Index	Description	Index	Description
1	Power Indicator	3	Board Indicator
2	Network Indicator		

Rear Panel

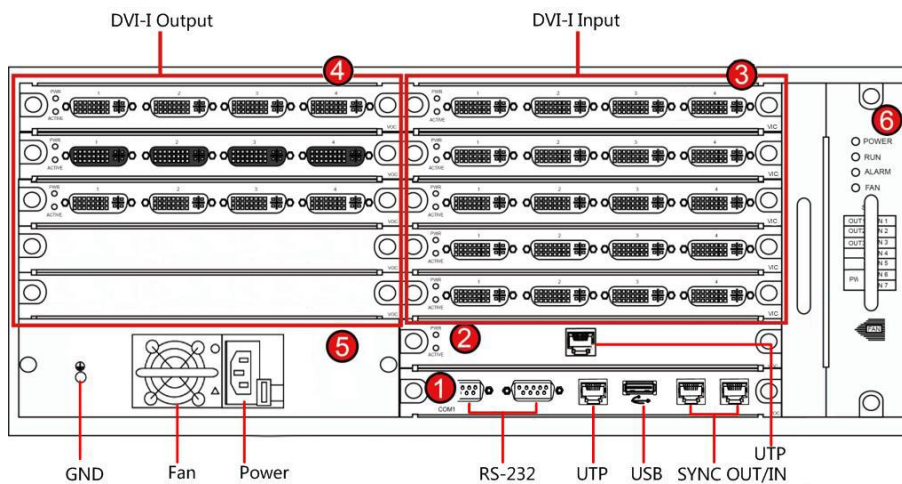

Index	Description	Index	Description
1	Motherboard	4	Signal Output Module
2	Signal Input Module	5	Power
3	Signal Input Module	6	Fan

Distributed by

## Available Model

DS-C10S-S09T  
DS-C10S-S11T  
DS-C10S-S22T

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com