

**DS-D4430FO-CKI**  
**Outdoor Fixed LED Displays**

- Widely applied in outdoor permanent advertising scenes
- Thin and light cabinet with the die-casting aluminum design
- Front IP65, Back IP54
- Free of air conditioners with multiple ventilation modes working together inside the cabinets
- Standing, wall mount, and lifting available for installation
- Customizable as stadium LED screens


## ▪ Specification

Model		DS-D4430FO-CKI
Cabinet	Pixel Configuration	1R1G1B
	Pixel Pitch Category	P3.076
	Pixel Pitch	3.076 mm
	Modules Component	2 × 6
	Dimensions (W × H × D)	640 mm × 960 mm × 138 mm (25.20" × 37.80" × 5.43")
	Resolution	208 × 312
	Area	0.6144 m <sup>2</sup>
	Weight	35 kg (77.16 lb.)
	Pixel Density	105625 dots/m <sup>2</sup>
	Lamp Board Housing	With housing
	Cabinet Material	Waterproof sheet metal box
	Maintenance Method	Back maintenance
	Cabinet Flatness	0.2 mm
	Protection Level	Front IP65/Back IP54
Key Material	Lamp Encapsulation	HG 1415
	Control System	DS-D42C04-N, DS-D42C06-N
Display	White Balance Brightness	4500 nits
	Color Temperature	3500 K to 9300 K adjustable
	Viewing Angle	Horizontal 140°, vertical 120°
	Contrast Ratio	≥ 5000:1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
Processing Performance	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	Up to 3840 Hz
	Grey Level	Up to 14 bit
	Display Color	16777216
Power	Power Supply	110 to 220 VAC ± 15%
	Max. Consumption	≤ 800 W/m <sup>2</sup>
	Average Consumption	< 300 W/m <sup>2</sup>
Working Environment	Working Temperature	-20 °C to 50 °C (-4 °F to 120 °F)
	Working Humidity	10% to 80% RH
	Storage Humidity	10% to 85% RH
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
General	Gross Weight	200 kg/5 in 1 (440.92 lb.)
	Package Dimension (W × H × D)	1370 mm × 770 mm × 1180 mm (53.93" × 30.31" × 46.46" )
	Lifespan	Lamp 100,000 hours

▪ **Available Model**

DS-D4430FO-CKI

▪ **Dimension**

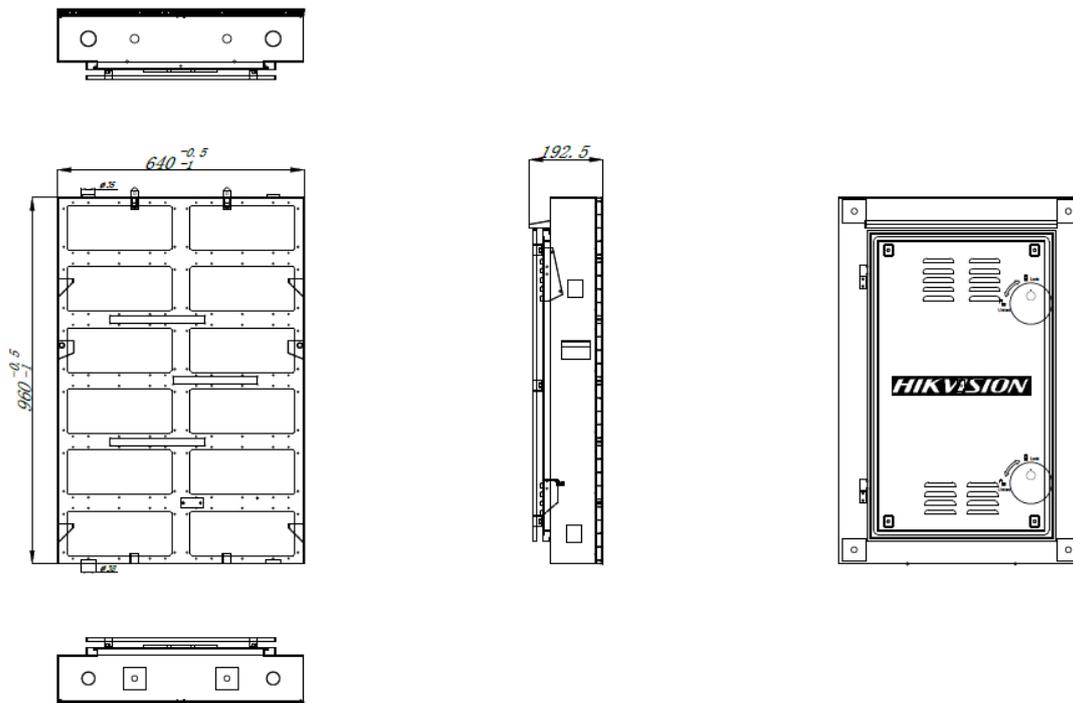

Unit: mm

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.

