

## DS-D4239RI-CAF P3.9 Indoor Rental LED Display



Front Maintenance



1:1




高视觉刷新率3840



具备面罩



航插设计

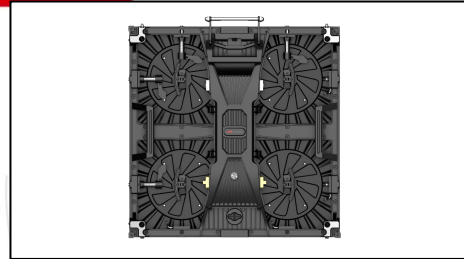

DS-D4239RI-CAF is the new generation indoor full-color rental LED display. LED display features in seamlessness, high brightness/contrast, wide viewing angle, and accurate color restoration, achieving good visual effect. It is widely used in places such as Stage performances, hotel weddings, festival celebrations, exhibitions, etc.

- Excellent in precision, heat dissipation, toughness, and solidity with the die-casting aluminum cabinet design.
- 500 mm × 500 mm cabinet with multiple dot pitches available and both indoor and outdoor scenarios applicable.
- Front maintenance available with the magnetic suction design, and quick front maintenance and installation achievable with the fixed installation of module at any position.
- 10-seconds replacement achievable with power supply, display controller, and adapter board integrated.
- Fast locking from the top, bottom, left, and right; 2-seconds locking for adjacent cabinets; convenient wiring with aviation plugs.
- Pendant mounting and standing available for installation.
- Free of fans and noise with excellent heat dissipation.
- High refresh rate (up to 3840 Hz) and high grey scale.



## ▪ Specification


Model		DS-D4239RI-CAF
Cabinet	Pixel Configuration	SMD Triad LED
	Pixel Pitch Category	P3.9
	Pixel Pitch	3.906 mm
	Lamp Dimensions	2.0 × 2.0 mm
	Modules Component	2 × 2
	Dimensions (W × H × D)	500 mm × 500mm × 87 mm (19.69" × 19.69" × 3.43")
	Resolution	128 × 128
	Area	0.25 m <sup>2</sup>
	Weight	7.7 Kg (16.97lb)
	Pixel Density	65536 dots/m <sup>2</sup>
	Lamp Board Housing	with housing
	Cabinet Material	Die-cast aluminum
	Maintenance Method	Front maintenance
	Cabinet Flatness	0.2 mm
Protection Level	Front protection level IP50	
Key Material	Lamp Encapsulation	XINLEI 2020
	Driver IC	ICN2153
	Control System	DS-D42C06-N
Display	White Balance Brightness	800 cd/m <sup>2</sup>
	Color Temperature	3000 K to 10000 K adjustable
	Viewing Angle	Horizontal 160°, vertical 160°
	Contrast Ratio	≥ 6000:1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
Processing Performance	Driving Method	Constant current driving

	Frame Frequency	60 Hz
	Refresh Rate	3840 Hz
	Grey Level	16 bit
	Display Color	281 trillion
Power	Power Supply	110~220 VAC ± 15%
	Max. Consumption	≤ 460 W/m <sup>2</sup>
	Average Consumption	≤ 150 W/m <sup>2</sup>
Working Environment	Working Temperature	-15-50 °C
	Working Humidity	10%~80%RH
	Storage Humidity	10%~80%RH
	Storage Temperature	-20~60 °C
General	Gross Weight	79 Kg (174.2 lb)
	Package Dimension (W × H × D)	560 mm × 580 mm × 670 mm (6 IN 1)
	Lifespan	Lamp 100,000 hours

#### ▪ Available Model

DS-D4239RI-CAF(海外标配),

#### ▪ Typical Application

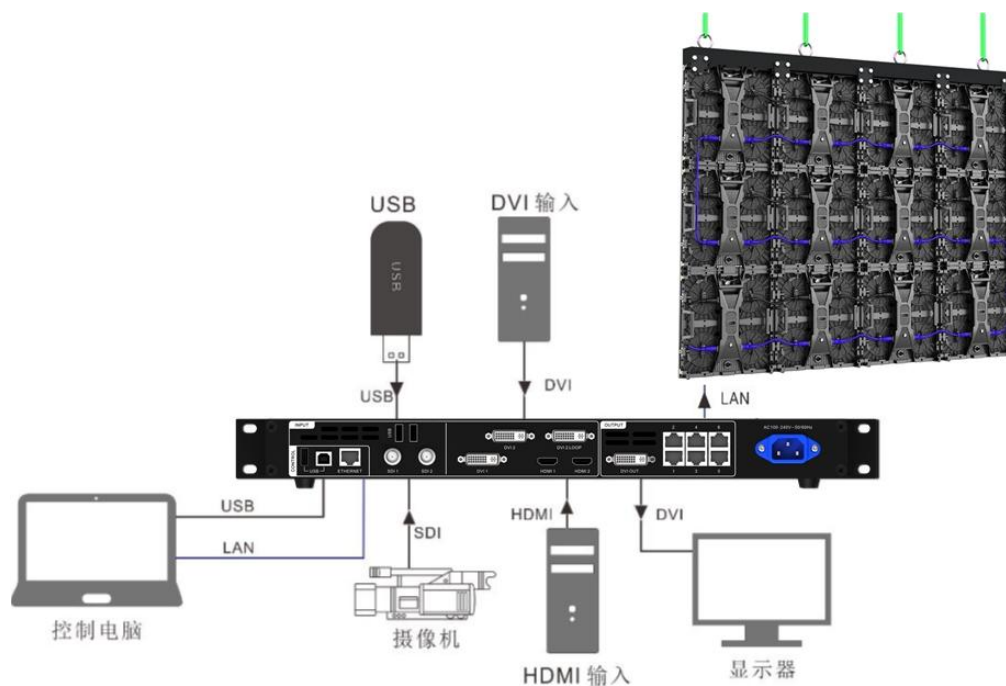

- Accessory
- Optional



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com