

DS-65VA300L Wireless Microphone



DS-65VA300W conference telephone based on internet communication , is a 2.4 G wireless digital conference, cooperating with software video system and video screen, such as Skype, QQ video or voice communication system, meeting with higher quality experience, making the meeting more efficient. It is suitable for all kinds of hardware video conference system, education training system, network monitoring system, remote medical system, network monitoring system, smart city system, conference recording system, etc.

Features and Functions

Professional and Reliable


- 360-degree mic coverage
- 256ms acoustic echo cancellation
- Full duplex
- Dynamic Noise Reduction(DNR)
- Supporting Skype, Wechat, MSN and other online communication software
- Connecting by 3.5mm earphone plug, communication will be more private and do not trouble colleague
- No need driver; clear, unmixed and not harsh sound quality;
- Elegant business appearance



Specifications

Model	DS-65VA300W	
Backlight	LED Backlight	
Color	10 bit, 1.07B	
Indicator LED	<ul style="list-style-type: none"> • triangle indicator on: working • left indicator on: speaker mute • right indicator on: MIC mute • left indicator flashing: volume adjusting • right indicator in orange: full charge 	
USB adapter	<ul style="list-style-type: none"> • 2.4 G RF and data processing • folding SMA antenna 	
Architecture	<ul style="list-style-type: none"> • Tabletop console contains audio processing functions ,USB function, indicator and key function • Built-in lithium battery(7-10h) • 2.4G wireless USB adapter • USB power line • USB charging plug(optional) 	
Power	USB supply(DC 5V/500mA) Built-in lithium battery	
Loudspeaker	3-inch anti-magnetic speaker	
Microphone	Cardioid microphones 0-8000Hz	
Size	155*148*37mm	
Weight	340g	
Keypad	<ul style="list-style-type: none"> • microphone mute key • loudspeaker mute key • volume up/down keys • standby key 	
Computer system	Windows 8/ Windows 7/ Windows 10/ Windows XP/.,ect	
Audio	<ul style="list-style-type: none"> • Digital audio processing • 256ms echo cancellation • Dynamic noise reduction • full duplex • 360 degree pick-up range 	
Recommended conditions	Temperature	5° ~44°
	humidity	20~85% condensation free
	noise level	<48db
	storage temperature	-10° ~55°
	Reverberation time	<0.5 seconds
Network interface	USB	USB 2.0(compatible with USB 1.1)
	Audio interface	3.5mm audio interface(out)
*Note	All specifications mentioned above are subject to the actual product	

Typical applications

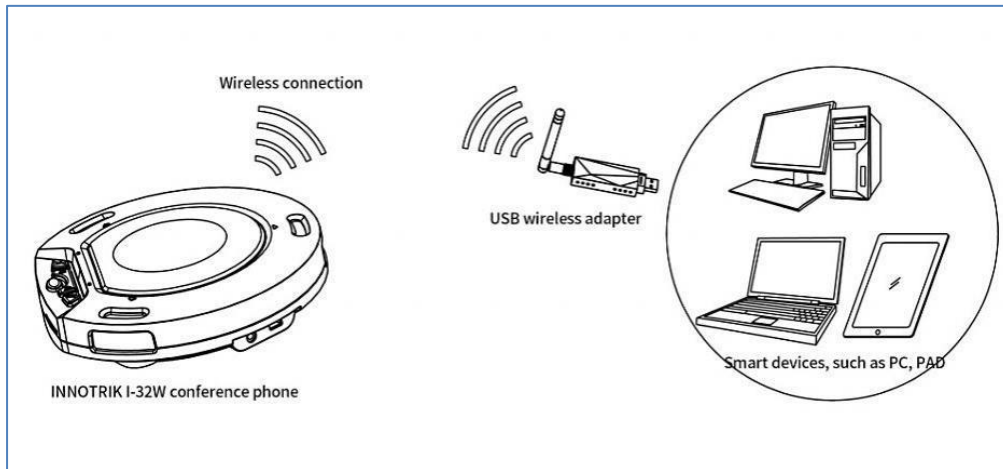

Distributed by



HIKVISION[®]

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761