

DS-D6055UN-B Wall-mounted Digital Signage



- **Metallic Appearance:** Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.
- **Exquisite Image:** Industrial A+ panel, auto-coloring and image-enhancing engine.
- **Variable Materials:** Supports static and dynamic materials, including the pictures, audio, video, scrolling subtitle, PDF, webpages, live video, number calling, pop-up pictures, etc.
- **Flexible Program Schedule:** Supports free schedules and district play of multiple materials; Supports variable play modes: play by day, play by week, play by loop, custom play, etc.
- **Organization Permission:** 5-level organization is available for managing materials, programs, terminals, and users; Supports creating custom users, allocating permission for users according to user level, and permission templates.
- **Multiple Security Safeguards:** 3-level check of materials, programs and schedules to prevent mistake release; Encryption of data in storage and transmission to prevent data tampering; With no default password, users can activate and set initial password to guarantee the password safety.




▪ Specification


Model	DS-D6055UN-B	
Display	Viewing angle	178° (H) /178° (V)
	Contrast ratio	3500 : 1
	Screen size	54.6 inch
	Active display area	1209.6 (H) mm × 680.4 (V) mm
	Backlight	LED
	Pixel pitch	0.315 (H) mm × 0.315 (V) mm
	Resolution	3840 × 2160
	Brightness	380 cd/m ²
	Color depth	8 bit, 16.7 M
	Response time	6.5 ms
	Color gamut	68% NTSC
	Reliability	7 × 24 H
	Refresh rate	60 Hz
Built-in System	Operation System	Android 6.0.1
	Processor	Cortex-A17, 4-core, 1.6 GHz
	Memory	2 GB
	Built-in storage	8 GB EMMC, 32 GB TF Card
Interface	Video & audio input	AUDIO IN × 1
	Video & audio output	AUDIO OUT × 1, 5W Speaker × 2
	Network interface	LAN × 1, Wi-Fi
	Data transmission interface	USB 2.0 × 2, TF Card × 1
General	Material type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Power supply	100 to 240 VAC, 50/60
	Power consumption	≤ 150 W
	Standby consumption	≤ 10 W
	Working temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working humidity	10% to 80% RH
	Storage temperature	-20 °C to 60 °C (-4 °F to 104 °F)
	Storage humidity	5% to 90% RH
	Product dimensions	1237.2 (W) × 708 (H) × 66.54 (D) mm (without wall-mounted backboard) 1237.2 (W) × 708 (H) × 82.04 (D) mm (with wall-mounted backboard)
	Package dimensions	1403 mm (W) × 898 mm (H) × 263 mm (D)
	Net weight	21 kg (34.17 lb.)
	Gross weight	24 kg (36.38 lb.)
Accessory	Power cord, User manual, LOGO, Remote controller	

▪ Available Model

DS-D6055UN-B

Dimension

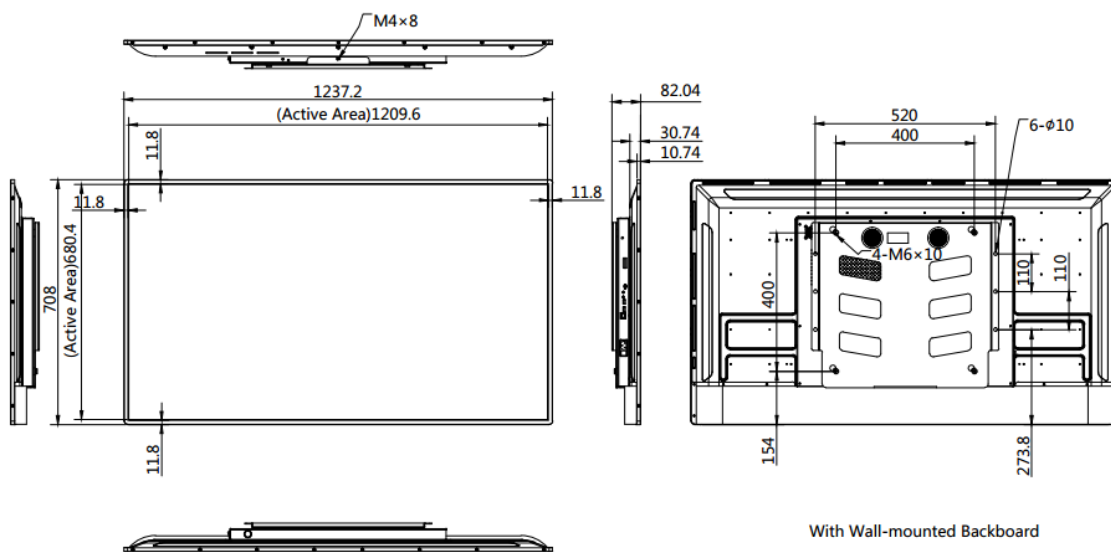

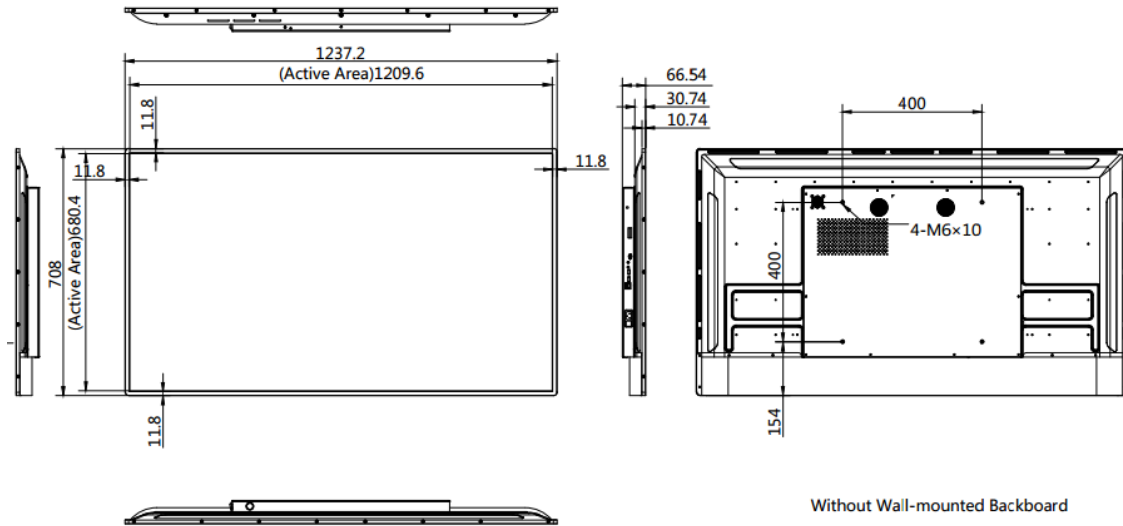

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com