


DS-D5032FL-C 31.5" PVM Monitor



Key Features

- Industrial grade A+ LCD panel
- Designed for surveillance, high reliability and stability
- Abundant varieties of interfaces: BNC, VGA, digital interface and diversified interfaces
- 16.7 million color, display picture perfectly
- Support horizontal and vertical display
- Horizontal 178°, Vertical 178°
- Dedicated project RS232 interface
- Build-in loudspeaker, audio visual connection
- VESA standard
- Metal shell

Interfaces

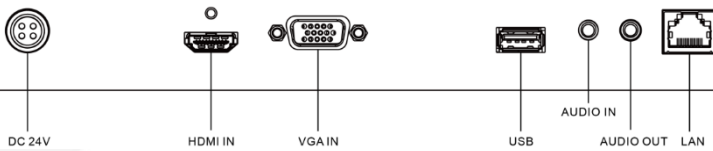

NO.	Description
1	DC 24V
2	HDMI IN
3	VGA IN
4	USB
5	AUDIO IN
6	AUDIO OUT
7	LAN

Model

DS-D5032FL-C




Specifications

Model	DS-D5032FL-C		
Backlight	LED Backlight		
Screen Size	31.5"		
Pixel Pitch	0.36375 mm x 0.36375 mm		
Max Resolution	1920 x 1080		
Brightness	400 cd/m ² (Typical)		
Contrast	3000 : 1		
Response Time	6.5 ms		
Color	16.7 M		
Active Area	698.40 mm x 392.85 mm		
Viewing Angle	Horizontal 178°, Vertical 178°		
Interfaces	HDMI Input	1	
	VGA Input	1	
	USB 2.0	1	
	AUDIO In	1	
	AUDIO out	1	
	LAN	1	
Power Supply	24V DC or 100 to 240V AC, 50/60Hz		
Power Consumption	≤ 65 W		
Standby Power Consumption	< 0.5 W(Standby)		
Loudspeaker	3W x 2		
Camera	Image Sensor	1/2.8" Progressive Scan CMOS	
	Min. Illumination	Color: 0.005 lux @(F1.2, AGC ON), 0 lux with IR on	
	Shutter Speed	1/3 s to 1/100,000 s	
	Slow Shutter	Support	
	Lens	2.8 mm, horizontal field of view: 108°	
	Lens Mount	M12	
	Iris	F1.6	
	Day &Night	IR cut filter	
	DNR	3D DNR	
	Wide Dynamic Range	120dB	
Compression Standard	Video Compression	Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264	
	H.264 Type	Main Profile/High Profile	
	H.264+	Support	
	H.265 Type	Main Profile	
	H.265+	Support	
Video Bit Rate	32 Kbps to 16 Mbps		
Image	Max. Resolution	1920 × 1080	
	Main Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280×720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280×720)	
	Sub Stream	50Hz: 25fps (640 × 360, 352 × 288) 60Hz: 30fps (640 × 360, 352 × 240)	
	Third Stream	50Hz: 25fps (1920 × 1080)	


		60Hz: 30fps (1920 × 1080)
	Image Enhancement	BLC/3D DNR
	Image Settings	Support rotate mode. Brightness, contrast, saturation, and sharpness are adjustable via web browser and client software
	ROI (Region of Interest)	Support 1 fixed region for each stream, and face dynamic tracking
	Target Cropping	Support
	Day/Night Switch	Auto/Scheduled
Network	Alarm Trigger	Motion Detection, Tampering Alarm, Network Disconnected, IP Address Conflict, Illegal Login, HDD full, HDD error
	Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
	Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
	General Function	Anti-Flicker, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filter
	On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 G
Working Temperature	0 °C ~ 40 °C(32°F ~ 104°F)	
Working Humidity	10% ~ 85% (No Condensation)	
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)	
Storage Humidity	10%~90% (No Condensation)	
Color of Casing	Black	
VESA	4-M6 200 mm * 200 mm	
Dimensions(W*H*D)	737.4 mm × 508 mm × 74.9 mm	
Packing Dimensions(W*H*D)	888 mm × 680 mm × 210 mm	
Gross Weight	22 kg	
Net Weight	18 kg	
Accessories	Power cord	1
	User manual	1
	Warranty card	1
	Remote control	1
	Battery	2
Bracket	Pedestal	Optional DS-DM3201B
	Wall mounted	Optional DS-DM1940W
*Note	All specifications mentioned above are subject to the actual product	

HIKVISION

Dimensions (unit: mm)

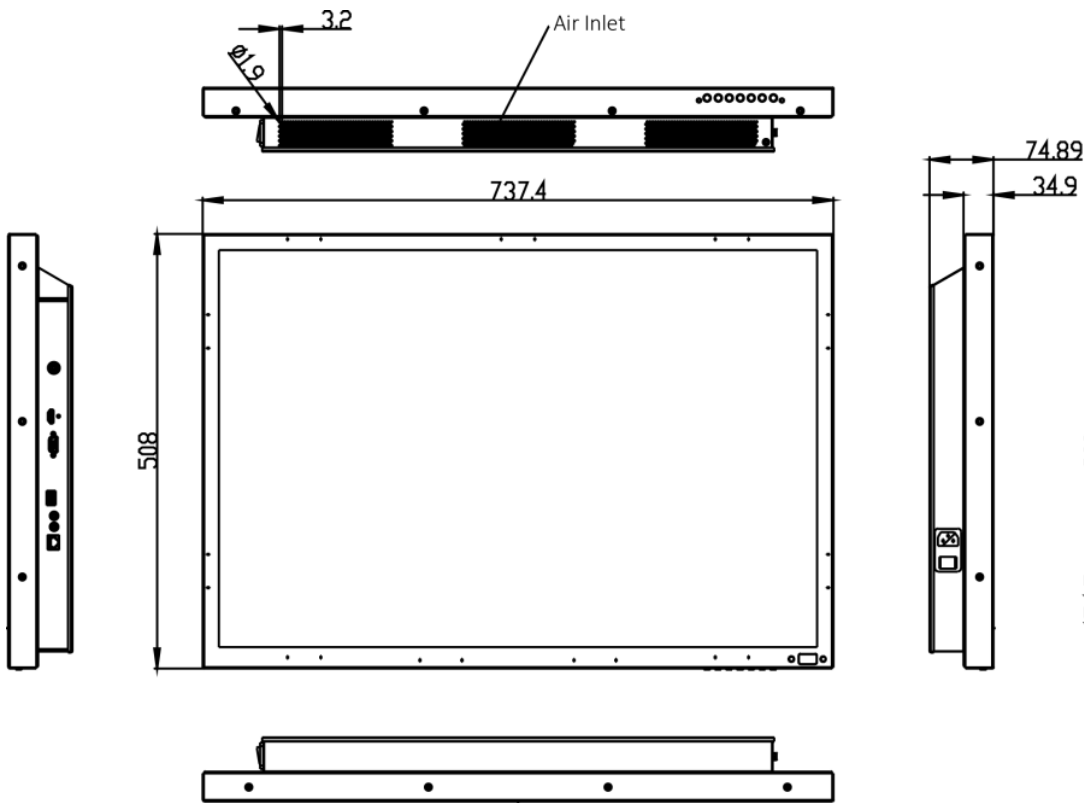


Distributed by

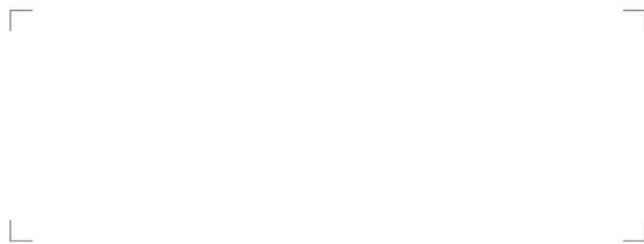

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

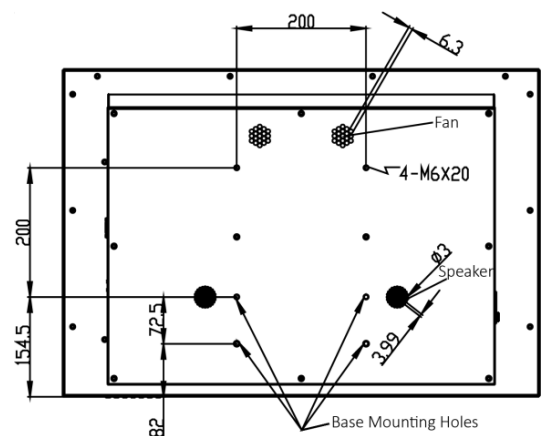

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761