

DS-KAD704Y Two Wire Distributor



- 2-wire IP distributor
- 4-port 2-wire cascade interfaces with device power supply
- 2 cascade interfaces for DS-KAD704Y, DS-KAD706Y & DS-KAD706Y-S series
- 6 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24 VDC input power supply




▪ **Specification**

General	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Power supply	24 VDC
Power consumption	CH1 to CH4 < 10 W

▪ **Available Model**

DS-KAD704Y

▪ **Dimension**

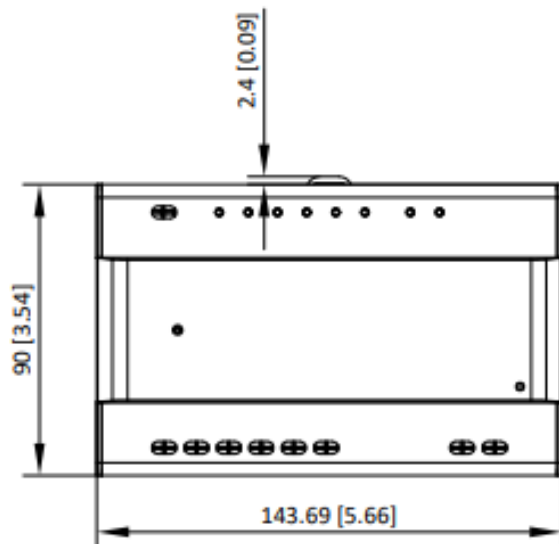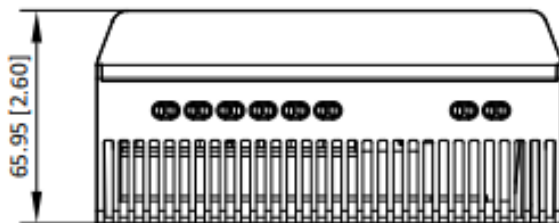

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**

DS-KAW30-2N Power Supply unit	DS-KIS702Y-P Two Wire IP Bundle
 A black, rectangular power supply unit with a red HIKVISION logo in the top left corner. It has several ports on the front and back.	 A bundle of two-wire IP camera components, including a camera lens, a small display screen, and a printed manual or instruction sheet.

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

