

# DS-E04HGHI-B 4-ch 1080p Lite 1U H.265 eSSD DVR

# **Key Feature**

- Powered by eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- Scene-adaptive bitrate control video compression
- Up to 1080p Lite@30 fps encoding capability
- Low power consumption
- Audio via coaxial cable















#### **Built-In SSD**

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

## **Easy Installation**

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

# **Compression and Recording**

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 2 MP Lite resolution

#### **Smart Function**

- Deep learning-based motion detection 2.0
- Smart search for efficient playback



# Specification

| Motion Detection 2.0   |  |  |  |  |
|------------------------|--|--|--|--|
| Human/Vehicle Analysis | Deep learning-based motion detection 2.0 is enabled by default for all analog channels,  |  |  |  |
|                        | it can classify human and vehicle, and extremely reduce false alarms caused by objects   |  |  |  |
|                        | like leaves and lights;  |  |  |  |
|                        | Quick search by object or event type is supported;                                       |  |  |  |
| Recording              |  |  |  |  |
| Video Compression      | H.265 Pro/H.265  |  |  |  |
| Encoding Resolution    | 1080p Lite/720p/720p Lite/WD1/4CIF/CIF/QVGA  |  |  |  |
| Frame Rate             | Main stream:   |  |  |  |
|                        | 1080p Lite/720p/720p Lite/WD1/4CIF@25 fps (P)/30 fps (N)                                 |  |  |  |
|                        | Note:  |  |  |  |
|                        | 1080p Lite/720p is 15 fps by default   |  |  |  |
|                        | Sub-stream:  |  |  |  |
|                        | 4CIF@15 fps; CIF/QVGA@25 fps (P)/30 fps (N)  |  |  |  |
| Video Bitrate          | According to the actual scene, scene-adaptive bitrate control technology would           |  |  |  |
|                        | automatically allocates appropriate bitrate to ensure the stability of recording period. |  |  |  |
| Stream Type            | Video, Video & Audio   |  |  |  |
|                        | Note: In order to protect privacy, the device will only record video (without audio) by  |  |  |  |
|                        | default. If you want to record audio, you shall manually enable audio recording. For     |  |  |  |
|                        | operation details, refer to the user manual.   |  |  |  |
| Audio Compression      | G.711u   |  |  |  |
| Audio Bitrate          | 64 Kbps  |  |  |  |
| Video and Audio        |  |  |  |  |
|                        | 1-ch   |  |  |  |
| IP Video Input         | Up to 1080p resolution   |  |  |  |
|                        | Support H.265+/H.265 IP cameras  |  |  |  |
| Analog Video Input     | 4-ch   |  |  |  |
|                        | BNC interface (1.0 Vp-p, 75 $\Omega$ ), supporting coaxitron connection                  |  |  |  |
| HDTVI Input            | 1080p25, 1080p30, 720p25, 720p30   |  |  |  |
| AHD Input              | 1080p25, 1080p30, 720p25, 720p30   |  |  |  |
| HDCVI Input            | 1080p25, 1080p30, 720p25, 720p30   |  |  |  |
| CVBS Input             | Support  |  |  |  |
| HDMI Output            | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz                                |  |  |  |
| VGA Output             | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz                                |  |  |  |
| Video Output Mode      | HDMI/VGA simultaneous output   |  |  |  |




| Audio Input           | 4-ch via coaxial cable  |  |  |  |  |
|-----------------------|---|--|--|--|--|
| Audio Output          | 1-ch via HDMI   |  |  |  |  |
| Synchronous playback  | 4-ch  |  |  |  |  |
| Network               |   |  |  |  |  |
| Total Bandwidth       | 64 Mbps   |  |  |  |  |
|                       | Incoming bandwidth: 4 Mbps  |  |  |  |  |
| Remote Connection     | 32  |  |  |  |  |
| Network Protocol      | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS                |  |  |  |  |
| Network Interface     | 1, RJ45 10/100 Mbps self-adaptive Ethernet interface                                    |  |  |  |  |
| Auxiliary Interface   |   |  |  |  |  |
|                       | Built-in 330 GB eSSD (300 GB available)   |  |  |  |  |
| Capacity              | Note:   |  |  |  |  |
|                       | The device can store about 2 weeks videos for 4-ch analog cameras (default parameters), |  |  |  |  |
|                       | this estimation is for reference only.  |  |  |  |  |
| USB Interface         | Rear panel: 2 × USB 2.0   |  |  |  |  |
| Alarm In/Out          | N/A   |  |  |  |  |
| General               |   |  |  |  |  |
| Power Supply          | 12 VDC, 1 A   |  |  |  |  |
| Consumption           | ≤ 5.4 W (with eSSD)   |  |  |  |  |
| Working Temperature   | -10 °C to 45 °C (14 °F to +113 °F)  |  |  |  |  |
| Working Humidity      | 10% to 90%  |  |  |  |  |
| Dimension (W × D × H) | 151 × 121 × 46 mm (5.94 × 4.76 × 1.81 inch)   |  |  |  |  |
| Weight                | ≤ 0.5 kg (with eSSD, 1.1 lb.)   |  |  |  |  |
|                       |   |  |  |  |  |

## Note:

Analog and IP signal input types are not configurable, and analog channel cannot be disabled to increase the maximum accessible number of network cameras.



# **Physical Interface**

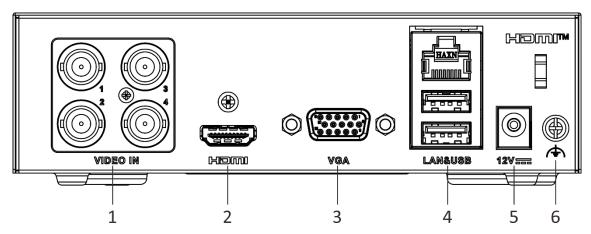

| No. | Description                | No. | Description                             |
|-----|----------------------------|-----|---|
| 1   | Video and coaxial audio in | 4   | LAN network interface and USB interface |
| 2   | HDMI interface             | 5   | Power supply                            |
| 3   | VGA interface              | 6   | GND                                     |

# **Available Model**

DS-E04HGHI-B

**Headquarters**No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.













