

## DS-UL8 4K Live Camera



- High quality imaging with 3840 × 2160 resolution
- Built-in supplement light for bright imaging
- Low distortion lens for reducing image distortion
- Built-in microphone with clear sound
- Type-C interface, supporting USB 3.0 and USB 2.0 protocols
- Plug-and-play, no need to install driver software
- Support auto focus



## ▪ Specification


Camera	
Image Sensor	8 MP CMOS
Signal System	PAL/NTSC
Frame Rate	USB3.0 MJPG: 3840 × 2160@30/25fps 2560 × 1440@30/25fps 1920 × 1080@30/25fps 1280 × 960@30/25fps 1280 × 720@30/25fps 640 × 480@30/25fps 640 × 360@30/25fps YUV: 1920 × 1080@30/25fps 1280 × 960@30/25fps 1280 × 720@30/25fps 640 × 480@30/25fps 640 × 360@30/25fps
	USB2.0 MJPG: 1920 × 1080@30/25fps 1280 × 960@30/25fps 1280 × 720@30/25fps 640 × 480@30/25fps 640 × 360@30/25fps YUV : 1920 × 1080@5fps 1280 × 960@5fps 1280 × 720@10fps 640 × 480@30/25fps 640 × 360@30/25fps
Resolution	3840 (H) × 2160 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 83°, vertical FOV: 53°, diagonal FOV: 91°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 0°; tilt: 0° to 90°; rotation: 0° <i>*It is recommended to use the tripod when the tilt angle is larger than 35°.</i>
Digital Zoom	Yes
Cable Length	2 m
Depth of Field	0.1 m to ∞

Interface	
Audio Sampling Rate	48 kHz
Interface	
Video Output	USB 2.0, USB 3.0
Audio In	Built-in mic
Operating System	Windows 8.1+ Android 8.1+ Linux 4.14+ macOS 10.12+ Chrome OS
General	
Operating Conditions	-10°C to 40°C, Humidity: 90% or less (non-condensing)
Power Supply	DC 5V ± 5% (USB)
Consumption	4.5 W MAX
Dimension	47.9 mm × 59.9 mm × 75.4 mm (1.89" × 2.36" × 2.97")
Weight	Approx. 171g (0.38 lb.)
Accessory	
Packing List	Camera × 1 USB Cable × 1 Quick Start Guide × 1 Bracket × 1 Tripod × 1

▪ **Available Model**

DS-UL8

▪ **Dimension**

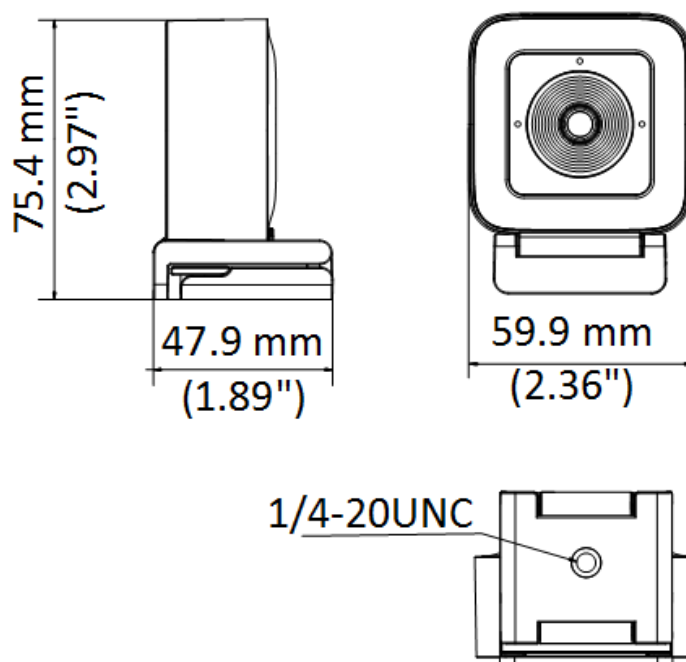

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**

T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**

T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**

T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**

T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**

T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**

T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**

T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**

T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**

T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**

T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**

T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**

Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**

T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**

T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**

T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**

T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**

T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**

T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**

T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**

T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**

T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**

T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**

T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**

T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**

sales.colombia@hikvision.com