

## DS-AAB-IO


### Alarm Box



### Feature

- Supports 1ch Alarm In/1ch Alarm Out Interface
- Supports both DVR and CAM mode
- Supports 12 VDC
- Expands the alarm function of DVR/CAM
- Rain-proof

### Dimension

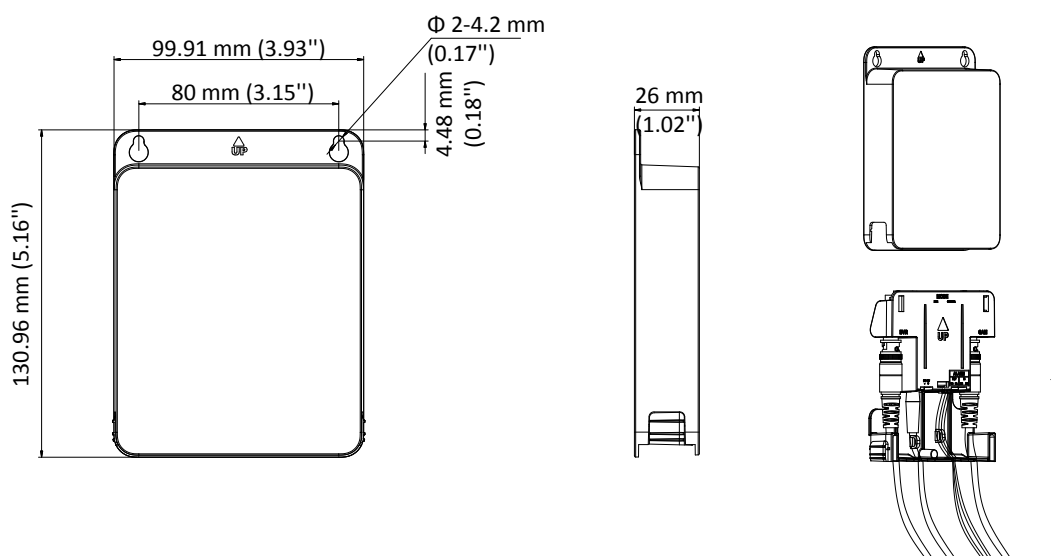

### Available Model

DS-AAB-IO

### Parameter

Model	DS-AAB-IO
Parameters	Alarm Box
Mode	DVR/CAM
Alarm	1 alarm in/out
Operating Conditions	-40°C to 60°C (-40°F to 140°F), humidity: 90% or less (non-condensing)
Power Supply	12VDC ± 25% <i>*You are recommended to use one power adapter to supply the power for one camera.</i>
Consumption	Max. 1.6 W
Material	Plastic
Communication	HIKVISION-C
Dimension	130.96 mm × 99.91 mm × 26 mm (5.16" × 3.93" × 1.02")
Weight	Approx. 148.5 g (0.33 lb.)
Installation	Desktop Installation, Wall Mounting

**Note**

- The alarm box should be installed on a flat surface.
- Rain-proof rubber is necessary for the outdoor application.
- The wall should be capable of supporting at least 3 times as much as the weight of the alarm box.