

DS-TL2000CI Supplement Light



- Continuous light, IR light source, 16 lamp beads
- Aluminum alloy light body, fin-type radiator, and high light transmission with tempering glass
- Infrared LED chips with long lifespan, good stability, and high luminous efficiency
- Professional optical design, light uniformity, and distinct target spot
- High beam light design with built-in automatic light control, open at low illumination
- Novelty design (small size, light weight), easy for installation and adjustment
- Water and dust resistant (IP66)
- Green environmental protection without harmful metal such as mercury and lead




▪ Specification

Supplement Light	
Light Type	IR light
LED Lamp Beads	16
Angle of Light	40°
Effective Distance	16-25 m
Day and Night Function	Support ambient brightness detection, automatic start-up at low illumination (optional)
Service Life	≥ 50,000 h
Housing Material	Die-cast aluminum
Power Supply	220 VAC ± 20%, 47Hz~63Hz
Consumption	Max. 36 W (Determined by control model)
Operating Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Operating Humidity	10% to 90%, no condensation
Weather Proof Rating	IP66
Dimension (W × H × D)	128 mm × 216 mm × 159 mm (5.0 × 8.5 × 6.3 inch)
Mounting Model	Support front-mounted and side-mounted installation (bracket rotation angle: -90° to 90°)
Weight	2.72 kg (6.0 lb)
Wave Length	≥ 850 nm (Infrared)
Color Temperature	5,000 K to 7,000 K

▪ Available Model

DS-TL2000CI

Dimension

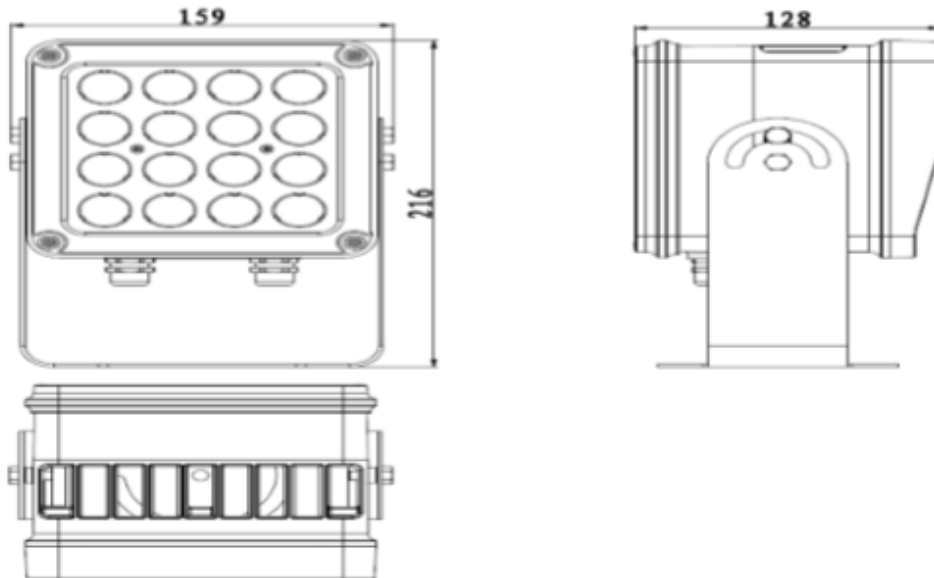

Unit: mm

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com