

DS-PDC15-EG2-WB(B)

DS-PDC15-EG2-WE is a two-way wireless detector featuring a solid curtain coverage up to 15m length by 3.6m height, it suitable for perimeter protection by setting up detection "curtain" walls or windows

- Long range with narrow angle detection
- Fully remote configurable through App
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected
- Frequency hopping against jamming for reliable transmission



Specification


Detection Performance		
Detection Method	Passive Infrared	
Detection Range	15 m	
Detection Angle	6.3°	
Detection Zones	18	
Detectable Speed	0.3 to 2 m/s	
Pet Immunity	None	
White Light Filter	6500lux	
Digital Temperature Compensation	Support	
Creep Zone Protection	Support	
Feature		
Digital Processing	Support	
Sealed Optics	Support	
Tamper Protection	Front, Rear	
Environment Temperature	Support	
Indicator	Support	
Signal Strength Indicator	Support	
Interface		
Power Switch	Power Up Enrolling	
LED Indicator	Blue (Alarm)	
Transmission		
Transmission Technology	Tri-X Wireless	
Transmission Method	Two-Way RF Wireless	
Transmission Frequency	433 MHz	
Transmission Security	AES-128 Encryption	
Transmission Range(Free Space)	1.2 Km	
Frequency Hopping	Support	
Enrolling Method	Power up, Remote ID, QR Code	
Electrical Characteristics		
Standard Battery Life	Up to 5 years (standby time)	
Power Supply	Battery Powered	
Battery Type	CR123A × 1	
Typical Voltage	3 V	
General		
Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)	
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)	
Operation Humidity	10% to 90%	
Dimension (W x H x D)	65.5 mm × 103 mm × 48.5 mm	
Weight	128 g	
Mounting Height	2.4 to 3.6 m	
Mounting Method	Wall	
Application Scenario	Indoor	
Bracket	Optional Wall & Ceiling Accessory	



Available Model

DS-PDC15-EG2-WB(B)

Dimension

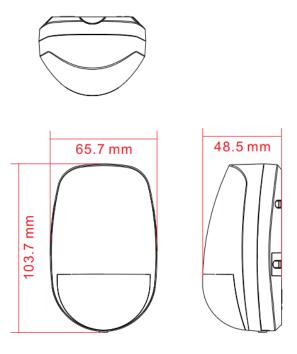

- Accessory
- Optional

DS-PDB-IN-Wall bracket Internal ceiling mounted bracket	DS-PDB-IN-Ceiling bracket Internal wall mounted bracket	DS-PDP-IN-CR123A Indoor Detector Battery
		LITHUM Battery LIMeO, + CR123A 3.0V -



Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision_Global





