

## DS-PM-MI1

### MBUS Single Input Expander




### Overview

DS-PM-MI1 MBUS single input expander supports normal open (NO) or normal close (NC) monitoring zone input with the wiring of 8.2K terminal resistances (EOL). It can cooperate with multi-channel compatible extending module, and occupies one extending zone of the system.

Dimension(L x W x H): 62mm x 33 mm x 19.5mm



### Physical Interface

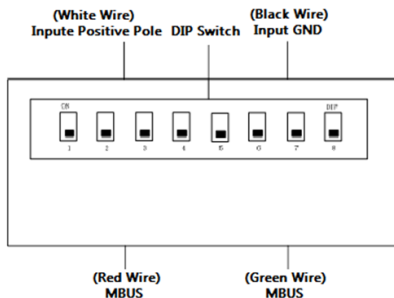

### Caution

- Power off both of the expander and control panel and set the DIP address on the expander before installation.
- Using different device addresses for expander on MBUS.
- The available device address for expander is from 1 to 253. The address 0,254 and 255 are not available.
- MBUS is polarity-free.