

DS-PM-MI2

MBUS Dual Inputs Expander




Overview

The DS-PM-MI2 MBUS dual inputs expander supports normal open (NO) or normal close (NC) monitoring zone input with the wiring of 8.2K terminal resistances (EOL). It can cooperate with multi-channel compatible extending modules, and occupies 2 extending zones of the system.

Dimension(L x W x H): 49.4mm x 32 mm x 14.3mm



Physical Interface

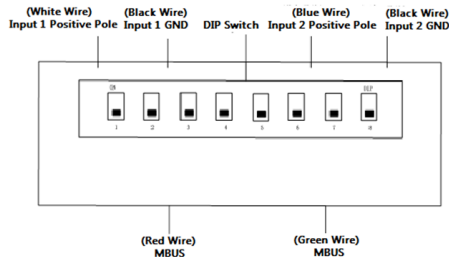

Caution

- Power off both of the expander and control panel and set the DIP address on the expander before installation.
- Using different device addresses for expander on MBUS.
- The available device address for expander is from 1 to 253. The address 0,254 and 255 are not available.
- MBUS is polarity-free.