

# DS-PM-MI8

## MBUS 8 Inputs Expander




### Overview

The DS-PM-MI8 8 inputs expander supports normally open (NO) or normal close (NC) monitoring zone input with the wiring of 8.2K terminal resistances (EOL). It can cooperate with multi-channel compatible extending module, and occupies 8 extending zones of the system.



Dimension(L x W x H): 74mm x 132.5mm x 27mm

### Physical Interface

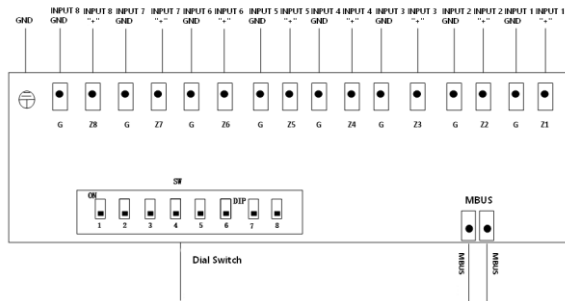

### Caution

- Power off both of the expander and control panel and set the DIP address on the expander before installation.
- Using different device addresses for expanders on MBUS.
- The available device address for expander is from 1 to 253. The address 0,254 and 255 are not available.
- MBUS is polarity-free.