

THC-T123-M 2 MP EXIR Turret Camera



- 1080p turret camera
- Good night-time performance with ultra-low light 0.005 lux
- Clear imaging against strong back light due to 120 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- EXIR 2.0: advanced infrared technology with 30 m IR distance
- Water and dust resistant (IP66)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS).


▪ Specification

Camera	
Image Sensor	2 MP CMOS image sensor
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.005 Lux@(F2.0, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Signal System	PAL/NTSC
Slow Shutter	Max. 16 times
Lens	
Lens Type	2.8 mm, 3.6 mm, 6 mm
Focal Length & FOV	2.8 mm, horizontal FOV: 106° 3.6 mm, horizontal FOV: 82° 6 mm, horizontal FOV: 51°
Lens Mount	M12
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
Smart Supplement Light	Yes
Image	
Image Parameters Switch	STD/HIGH-SAT
Image Settings	Brightness, Mirror, Sharpness, AGC
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	≥120 dB
Image Enhancement	BLC, HLC
Noise Reduction	3D DNR
White Balance	Auto/Manual
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS, 1 HD analog output
General	
Power	12 VDC ±25%, max. 4.6 W *You are recommended to use one power adapter to supply the power for one camera.
Material	Metal
Dimension	∅ 82.6 mm × 69.66 mm (∅ 3.38" × 2.74")
Weight	235 g (0.52 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)
Language	English
Approval	
Protection	IP66

▪ **Available Model**



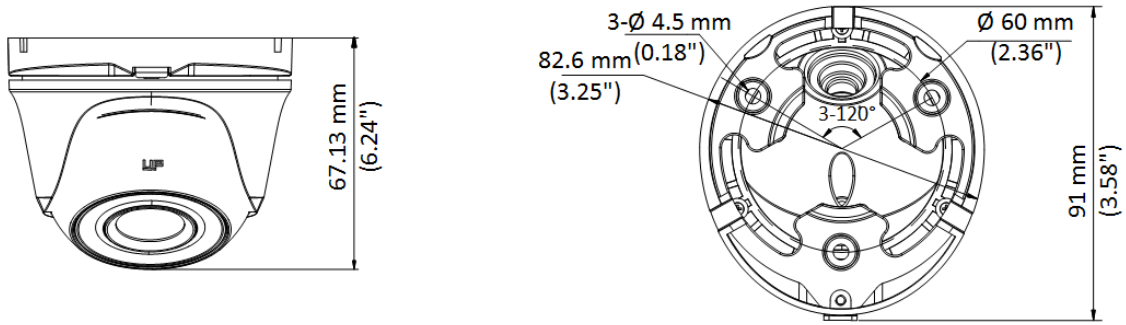

THC-T123-M

▪ **Dimension**



▪ **Accessory**

▪ **Optional**

HIA-J101 Junction Box	HIA-B201 Corner Mount	HIA-B301 Vertical Pole Mount	HIA-B401-110T Wall Mount
			

HiLook

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.

