

DS-2CD3721G2-IZS
2MP Varifocal Dome Network Camera

Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology to save bandwidth and storage
- Clear imaging against strong back light due to WDR technology
- 3D DNR technology delivers clean and sharp images
- Easy installation with Power over Ethernet (PoE) technology
- Water and dust resistant (IP67) and vandal proof (IK10)

▪ Specification

Camera		
Image Sensor	5	1/2.8" Progressive Scan CMOS
Max. Resolution		1920 × 1080
Shutter Time		1/3 s to 1/100,000 s
Min. Illumination	4	Color: 0.005 Lux @ (F1.6, AGC ON), Black/White: 0 Lux with light
Day & Night	3	IR cut filter
Angle Adjustment		Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Lens		
Lens Type		Varifocal lens, motorized lens, 2.7 to 13.5 mm
Focal Length & FOV	6	2.7 to 13.5 mm, horizontal FOV 111.5° to 33.4°, vertical FOV 58.4° to 18.8°, diagonal FOV 134.3° to 38.3°
Lens Mount		Integrated
Iris Type		Fixed
Aperture		Max. F1.6
Depth of Field		Wide: 0.7 m to ∞ Tele: 2.7 m to ∞
DORI		
DORI		Wide: D: 42.7 m, O: 16.9 m, R: 8.5 m, I: 4.3 m Tele: D: 132 m, O: 52.4 m, R: 26.4 m, I: 13.2 m
Illuminator		
Supplement Light Type		IR
Supplement Light Range		Up to 40 m
Smart Supplement Light		Yes
IR Wavelength		850 nm
Video		
Main Stream	1,2	50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream		50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Third Stream		50 Hz: 1 fps (640 × 360) 60 Hz: 1 fps (640 × 360)
Video Compression	9,11	Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264
Video Bit Rate		32 Kbps to 8 Mbps
H.264 Type		Baseline Profile, Main Profile, High Profile
H.265 Type		Main Profile
Bit Rate Control		CBR, VBR
Region of Interest (ROI)		1 fixed region for main stream and sub-stream
Audio		
Audio Type		Mono sound
Environment Noise Filtering		Yes
Audio Sampling Rate		8 kHz/16 kHz
Audio Compression		G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC

Audio Bit Rate		64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)
Network		
Security		Password protection, complicated password, HTTPS encryption, IEEE 802.1X authentication (EAP-MD5), watermark, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, security audit log, TLS 1.2, TLS 1.3, host authentication (MAC address)
Simultaneous Live View		Up to 6 channels
API	10	Open Network Video Interface (Profile S, Profile T, Profile G),ISAPI,SDK 16
Protocols	10, 14	TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTSP, RTCP, NTP, IGMP, IPv4, IPv6, UDP, QoS, FTP, SMTP, HTTPS, DDNS, UPnP, IEEE 802.1X, SNMP, ONVIF, ISUP 12
User/Host		Up to 32 users 3 user levels: administrator, operator, and user
Client		iVMS-4200,Hik-Connect
Web Browser		Plug-in required live view: IE 10, IE 11, Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+
Image		
8	Wide Dynamic Range (WDR)	120 dB
	SNR	≥ 52 dB
	Day/Night Switch	Day,Night,Auto,Schedule
	Image Enhancement	BLC,HLC,3D DNR
	Image Settings	Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,adjustable by client software or web browser
	Privacy Mask	4 programmable polygon privacy masks
Interface		
	Ethernet Interface	13 1 RJ45 10 M/100 M Base-T self-adaptive Ethernet port
	On-Board Storage	15 Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 256 GB
	Audio	1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium, 1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium
	Alarm	1 input, 1 output (max. 12 VDC, 30 mA)
	Reset Key	Yes
Event		
	Basic Event	7 Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,exception
	Smart Event	Line crossing detection, intrusion detection
	Linkage	Upload to FTP/NAS/memory card,notify surveillance center,trigger recording,trigger capture
General		
	Power	13 12 VDC ± 25%, 0.8 A, max. 12 W,Ø5.5 mm coaxial power plug,reverse polarity protection, PoE: IEEE 802.3af, Class 3
	Material	Metal
	Dimension	Ø121.5 mm × 97.6 mm (Ø4.78" × 3.84")

Package Dimension	150 mm × 150 mm × 141 mm (5.9" × 5.9" × 5.6")
Weight	Approx. 885 g (1.95 lb.)
With Package Weight	Approx. 1440 g (3.17 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language	English, Turkish, Polish, Romanian, Czech, Slovak, Traditional Chinese, Thai, Vietnamese, Croatian, Slovenian, Serbian, Ukrainian
General Function	Heartbeat,mirror,password reset via email,pixel counter,password protection,anti-banding
Approval	
EMC	CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014
Safety	17 CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017, BIS: IS 13252 (Part 1): 2010/IEC 60950-1: 2005
Environment	CE-RoHS: 2011/65/EU
Protection	IP67: IEC 60529-2013,IK10: IEC 62262:2002

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.


This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ Available Model

DS-2CD3721G2-IZS(2.7-13.5mm)

▪ Dimension

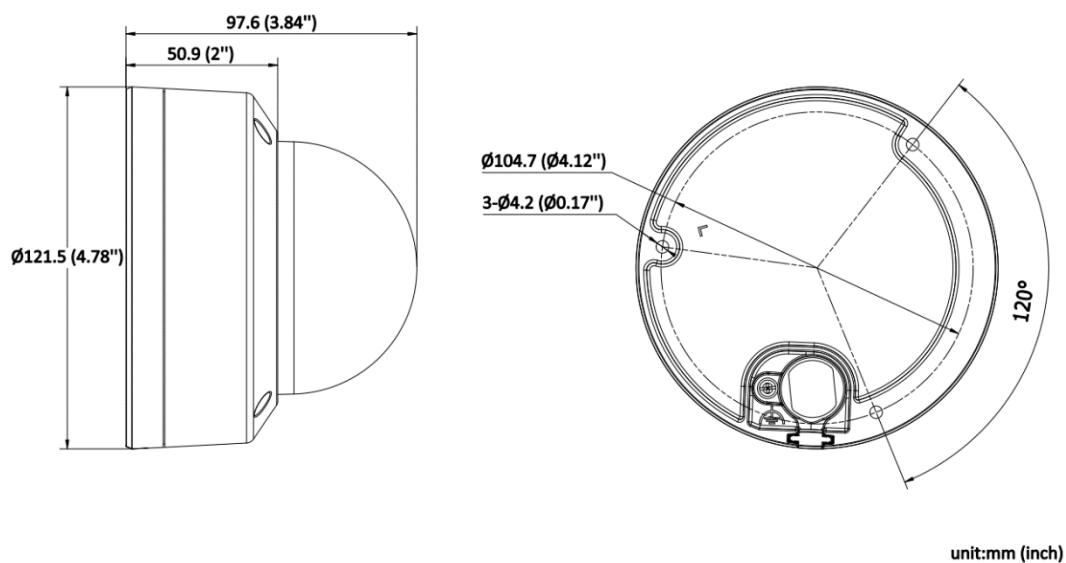

▪ Accessory

▪ Optional

DS-1272ZJ-120 Wall mount	DS-1272ZJ-120B Wall mount	DS-1271ZJ-120 Pendant Mount	DS-1275ZJ-SUS Vertical pole mount	DS-1276ZJ-SUS Corner mount
				
DS-1280ZJ-DM46 Junction box	DS-2280ZJ-WA120 Junction box	DS-2210ZJ-WA-120 Pendant Mount	DS-2200ZJ-WA-120 Wall mount	DS-2200ZJ-WAJ-120 Wall mount
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq