

DS-2CD3621G2-IZS
2MP Varifocal Bullet Network Camera

Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology to save bandwidth and storage
- Clear imaging against strong back light due to WDR technology
- 3D DNR technology delivers clean and sharp images
- Easy installation with Power over Ethernet (PoE) technology
- Water and dust resistant (IP67)

▪ Specification

Camera		
Image Sensor	5	1/2.8" Progressive Scan CMOS
Max. Resolution		1920 × 1080
Shutter Time		1/3 s to 1/100,000 s
Min. Illumination	4	Color: 0.005 Lux @ (F1.6, AGC ON), Black/White: 0 Lux with light
Day & Night	3	IR cut filter
Angle Adjustment		Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Lens		
Lens Type		Varifocal lens, motorized lens, 2.7 to 13.5 mm
Focal Length & FOV	6	2.7 to 13.5 mm, horizontal FOV 111.5° to 33.4°, vertical FOV 58.4° to 18.8°, diagonal FOV 134.3° to 38.3°;
Lens Mount		Integrated
Iris Type		Fixed
Aperture		Max. F1.6
Depth of Field		Wide: 0.7 m to ∞ Tele: 2.7 m to ∞
DORI		
DORI		Wide: D: 42.7 m, O: 16.9 m, R: 8.5 m, I: 4.3 m Tele: D: 132 m, O: 52.4 m, R: 26.4 m, I: 13.2 m
Illuminator		
Supplement Light Type		IR
Supplement Light Range		Up to 60 m
Smart Supplement Light		Yes
IR Wavelength		850 nm
Video		
Main Stream	1,2	50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream		50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Third Stream		50 Hz: 1 fps (640 × 360) 60 Hz: 1 fps (640 × 360)
Video Compression	9,11	Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264
Video Bit Rate		32 Kbps to 8 Mbps
H.264 Type		Baseline Profile, Main Profile, High Profile
H.265 Type		Main Profile
Bit Rate Control		CBR, VBR
Region of Interest (ROI)		1 fixed region for main stream and sub-stream
Audio		
Audio Type		Mono sound
Environment Noise Filtering		Yes
Audio Sampling Rate		8 kHz/16 kHz
Audio Compression		G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC

Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)
Network	
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-MD5), watermark, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, security audit log, TLS 1.2, TLS 1.3, host authentication (MAC address)
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface (Profile S, Profile T, Profile G), ISAPI, SDK 18
Protocols	TCP/IP, ICMP, DHCP, DNS, HTTP , RTP, RTSP , RTCP, NTP , IGMP, IPv4 , IPv6 , UDP, QoS, FTP, SMTP, HTTPS , DDNS, UPnP, IEEE 802.1X , SNMP , ONVIF , ISUP 12
User/Host	Up to 32 users 3 user levels: administrator, operator, and user 10
Client	iVMS-4200, Hik-Connect
Web Browser	Plug-in required live view: IE 10, IE 11, Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+
Image	
8 Wide Dynamic Range (WDR)	120 dB
SNR	≥ 52 dB
Day/Night Switch	Day, Night, Auto, Schedule
Image Enhancement	BLC, HLC, 3D DNR
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser
Privacy Mask	4 programmable polygon privacy masks
Interface	
Ethernet Interface	1 RJ45 10 M/100 M Base-T self-adaptive Ethernet port 13
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 256 GB 17
Audio	1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium, 1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium
Alarm	1 input, 1 output (max. 12 VDC, 30 mA)
Reset Key	Yes
Event	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception 7
Smart Event	Line crossing detection, intrusion detection
Linkage	Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture
General	
Power	12 VDC ± 25%, 0.86 A, max. 12.9 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af , Class 3 13
Material	Metal
Dimension	Ø105 mm × 252 mm (Ø4.1" × 9.9")
Package Dimension	280 mm × 135 mm × 135 mm (11.0" × 5.3" × 5.3")

Weight		Approx. 962 g (2.21 lb.)
With Package Weight		Approx. 1493 g (3.29 lb.)
Storage Conditions		-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	15	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language		English, Turkish, Polish, Romanian, Czech, Slovak, Traditional Chinese, Thai, Vietnamese, Croatian, Slovenian, Serbian, Ukrainian
General Function		Heartbeat,mirror,password reset via email,pixel counter,password protection,anti-banding
Approval		
EMC		CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014
Safety	19	CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017, BIS: IS 13252 (Part 1): 2010/IEC 60950-1: 2005
Environment		CE-RoHS: 2011/65/EU
Protection	14	IP67: IEC 60529-2013

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.


This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ Available Model

DS-2CD3621G2-IZS(2.7-13.5mm)

▪ Dimension

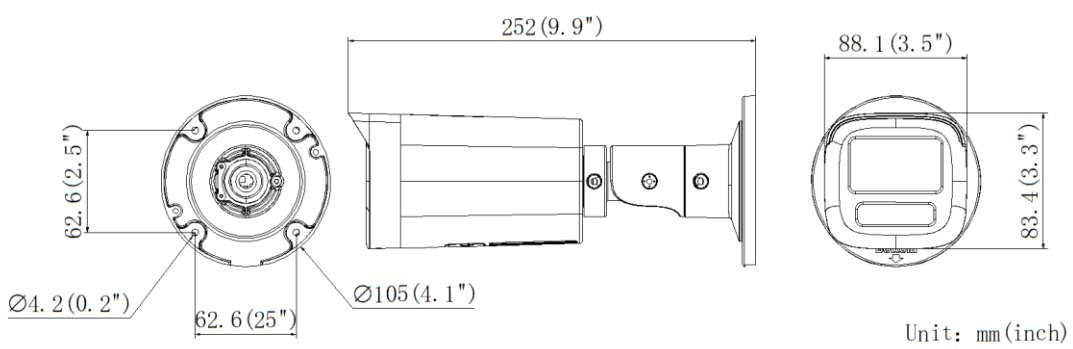

▪ Accessory

▪ Optional

DS-1275ZJ-SUS Vertical pole mount	DS-1276ZJ-SUS Corner mount	DS-1260ZJ Junction box	DS-1280ZJ-S Junction box	DS-1275ZJ-S-SUS Vertical pole mount
				

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

 Hikvision

 HikvisionHQ

 HikvisionHQ

 Hikvision_Global

 Hikvision Corporate Channel

 hikvisionhq