

DS-K2M061(T) Secure Door Control Unit




DS-K2M061 Secure Door Control Unit is the interlayer between the access control terminal and the lock, including the door magnetic, the lock, the exit button and so on. It can be applied to keep the door closed when the door is damaged

- Communicates with the access control terminal via RS-485 to execute the commands from the terminal including open door, close door, normally open and normally closed
- Collects the door magnetic signal, the exit button signal and the tamper-proof signal and send them to the access control terminal
- Supports tampering alarm
- Supports RS-485 communication indicators to show the communication status
- 4-ch DIP switch supporting ID No. configuration
- Supports a Wiegand interface to connect a Wiegand card reader to enter/exist access control terminal by swiping card
- Fire interface and exit button linkage

▪ Specification

Interface	
Alarm input	2
Alarm output	1
RS-485	1
General	
Indicator	1 for power supply status
Power supply	12 VDC, 0.5 A
Working temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Working humidity	0% to 95% (relative humidity)
Dimensions	48 mm × 115 mm × 26 mm (1.9" × 4.5" × 1.0")
Installation	Wall Mounting
Weight	Gross weight: 0.28 kg (0.62 lb) Net weight: 0.20 kg (0.44 lb)


▪ Typical Application

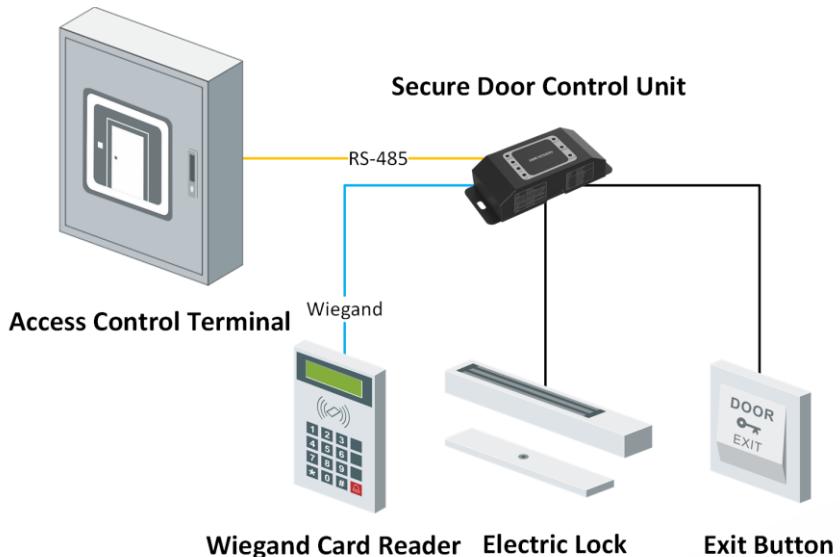

▪ Available Model

DS-K2M061(T)
DS-K2M061(USA-STD)
DS-K2M061/USA
DS-K2M061/待用

▪ Dimension

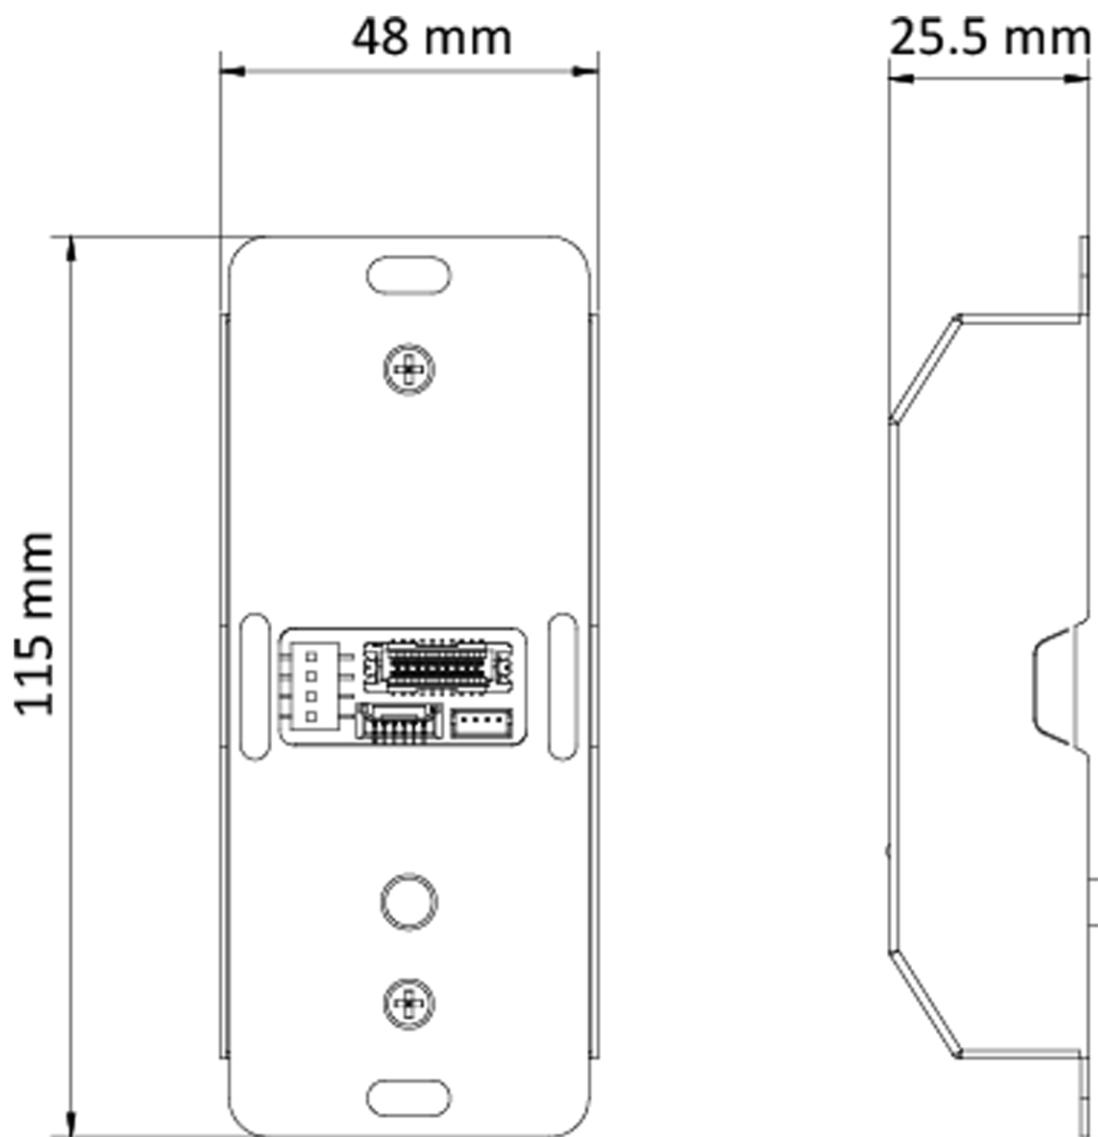

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®