

DS-QAE0420G1-V Analog Column Speaker

- The speaker unit adopts aerospace magnetic, imported adhesive coating, and lightweight sound film design, with high sensitivity, bright sound, and long transmission distance
- Adopt professional engineering reinforced plastics with high strength
- By using L-brackets, the installation surface angle can be adjusted for convenient installation
- Professional integrated design, supporting IP66 waterproof, with a simple and beautiful appearance
- Used for meeting rooms, conferences and other public areas



## Specification

Speaker	
8 Ω	
20 W	
89.5 dB ± 3 dB	
96 dBSPL	
100 Hz to 20 kHz	
Full frequency $4'' \times 1$ , high frequency $0.75'' \times 1$	
Interface	
Green end (terminal block), constant voltage input: 100 V, COM	
IP66	
White	
Front cover: steel mesh, back cover: plastic	
280 mm × 161.9 mm × 119.8 mm (11.02"× 6.37" × 4.72")	
Approx. 1862.4 g (4.11 lb.)	
340 mm × 306 mm × 175 mm (13.39"× 12.05" × 6.89")	
2610.2 g (5.75 lb.)	
Device × 1	
Screw pack × 1 L-Bracket × 2	
	Regulatory Compliance and Safety Information × 1
-25 °C to 55 °C(-13 °F to 131 °F)	
< 90% (No condensation)	


\*The device should be used together with amplifier.


## Available Model

DS-QAE0420G1-V

Dimension



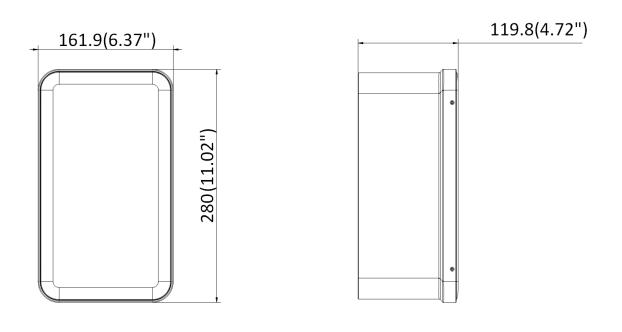



Unit: mm (inch)



Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.



f HikvisionHQ



HikvisionHQ





Hikvision Corporate Channel

(O) hikvisionhq

©Hikvision Digital Technology Co., Ltd. 2023 | Data subject to change without notice |