

THE RIGHT ACCESS AT THE RIGHT TIME



DS-K2600T PROFESSIONAL MULTI-DOOR ACCESS CONTROLLER

Access Controller DS-K2600T Series

Professional Access Controller for 1 / 2 / 4 doors

Hikvision professional access controller DS-K2600T series supports TCP/IP, ISUP 5.0, and ISAPI protocol. The communication data is specially encrypted for extra security. The controller is designed with a backup battery space & tamper-proof switch, also supports RS-485 / OSDP, and Wiegand readers. Compared to standalone terminals, it can support lots of advanced functions, such as multi-door interlock, inner-device multi-door anti-passing back, cross-controller anti-passing back, super card function

Product Highlights

1. Advanced functions for professional access control

Multi-door Interlocking

To open one of the doors, other doors must stay closed in the same access control device



Opening Door with First Card

After the first card is swiped, it allows multiple persons to access the door or other authentication actions.



Anti-Passing back

Person can pass the access control point in a specified path after swiping a card.



Multiple Authentication

Manage the cards by group and set the authentication for multiple cards for one access control point.



Cross-Controller Anti-passing Back

Swipe card according to the configured route in multiple access control devices.



Inter-System Linkage


Supports I/O linkage and event linkage with Hikvision CCTV system, alarm system, etc.



2. Professional hardware for more stability

Wiegand / RS485 / OSDP Reader Wiring

Compatible with 3rd party Wiegand / OSDP reader

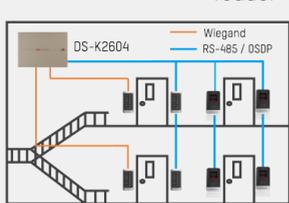

Backup battery design

Standard 7AH battery space reserved. Order batter separately if required



Protection on relay

Piezoresistors prevent lock relay burn-in to protect lock relay



Fire alarm system integration

Fire alarm relay will cut off and lock power when the fire alarm is triggered




4 Zone Alarm Input, 8 Case Input

Controller can monitor the detectors' status.



3. Flexible network connection and integration

- Easy data transferred from terminal to software via ISUP5.0 on public network.
- ISAPI protocol supported to make 3rd party integration easier.

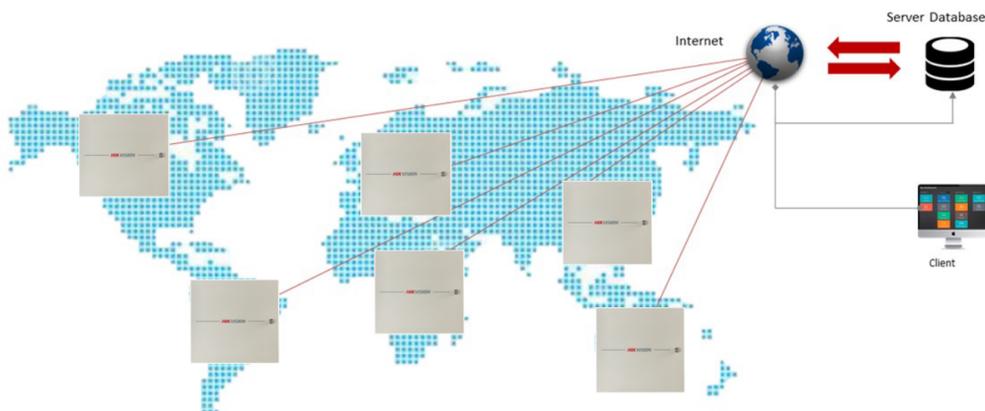

Access Controller Product Showcase

	DS-K2601T	DS-K2602T	DS-K2604T
Product Image			
Power supply		100 ~240 VAC	
Power consumption (with Load)	<= 50W	<= 100W	<= 100W
Capacity		100,000 cards, 300,000 events	
Network		TCP/IP, ISUP5.0, ISAPI	
Wiegand reader	2	4	4
RS485 / OSDP reader	2	4	8
Lock relay	1	2	4
Exit button	1	2	4
Alarm Input / Output	4 / 2	4 / 4	4 / 4
Case Input	2	4	8
Dimensions (L × W × H)		373 mm × 345 mm × 98 mm (14.7" × 13.6" × 3.6")	

Access Controller Typical Configurations

