

# HiLook

Great View, Great Value



## DVR-104U-K1

4 Channel 5MP Digital Video Recorder

For HiLook Analogue CCTV Kit



H.265 Pro+ can significantly compress the video file while maintaining a high image quality, maximising storage space on the included HDD.



HDD storage capacity expandable up to 6 TB, coupled with the H265 Pro+ technology means you have even greater storage available - capture every important moment.

Video/Audio Input	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Analog video input	4-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI input	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30
CVBS input	PAL/NTSC
IP video input	4-ch (up to 8-ch)
	Up to 8 MP resolution
	Supports H.265+/H.265/H.264+/H.264 IP cameras
Audio compression	G.711u
Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)

Video/Audio Output	
HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Encoding resolution	5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
	Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video bit rate	32 Kbps to 10 Mbps
Audio output	1-ch, RCA (Linear, 1 KΩ)
Audio bit rate	64 Kbps
Dual stream	Support
Stream type	Video, Video & Audio
Synchronous playback	4-ch

Network Management	
Incoming bandwidth	32 Mbps
Remote connections	32
Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF

Hard disk	
SATA	1 SATA interface
Capacity	Up to 6 TB capacity for each disk


## External Interface

Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 K $\Omega$ ) (using the 1st audio input)
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface
USB interface	2 x USB 2.0

## General

Power supply	12 VDC
Consumption (without HDD)	$\leq 15$ W
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Working humidity	10% to 90%
Dimensions (W x D x H)	200 x 200 x 45 mm (7.9 x 7.9 x 1.8 inch)
Weight (without HDD)	$\leq 1.16$ kg (2.6 lb)

## Physical Interfaces

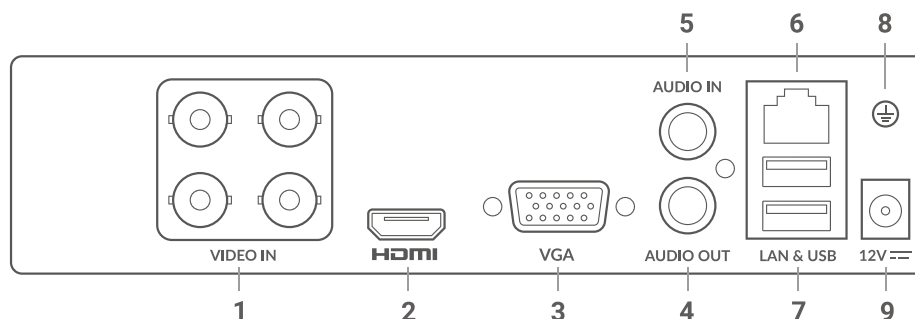

- |                  |                            |                |
|------------------|----------------------------|----------------|
| 1 VIDEO IN       | 4 AUDIO OUT, RCA Connector | 7 USB Port     |
| 2 HDMI Interface | 5 AUDIO IN, RCA Connector  | 8 GND          |
| 3 VGA Interface  | 6 LAN Network Interface    | 9 Power Supply |