



Hikvision Perimeter Protection Product Kit list





Application: Farm

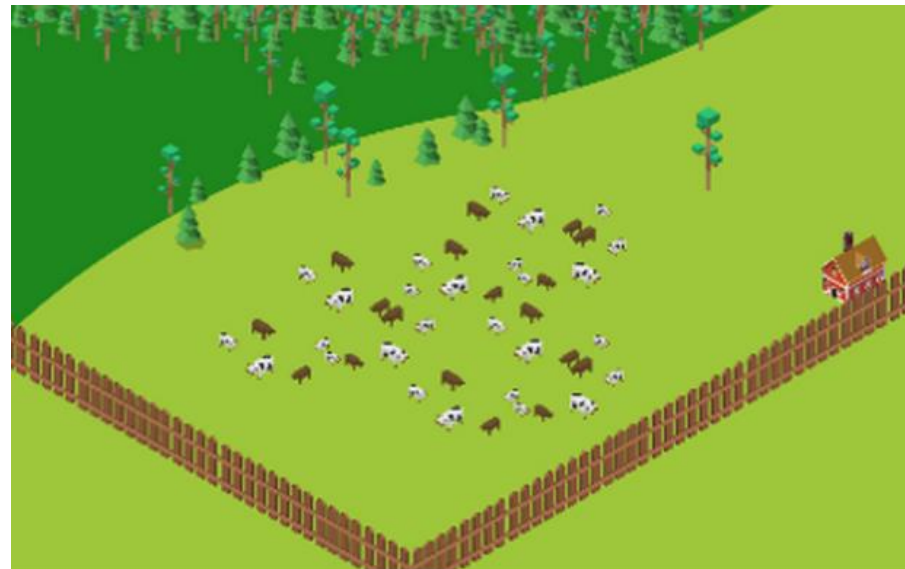

Product Model	Picture	Description	Mark
DS-2TD2137-15-V1 DS-2TD2137-25-V1 DS-2TD2137-35-V1		Thermal: 384 × 288; Lens: 15/25/35mm False alarm reduction	Max VCA detection distance: 150m/250m/350m
DS-3WF02C-5N/O		2.4Ghz 150Mbps 3km Outdoor Wireless CPE	Wireless connection to save cabling cost
DS-3E0109P-E(C)		8 PoE ports switch	
DS-D5022FN		22" monitor, VGA/HDMI input	
DS-7732NI-I4		32 IP channels NVR. alarm I/O: 16/4 Up to 16-ch @ 1080p decoding capacity	

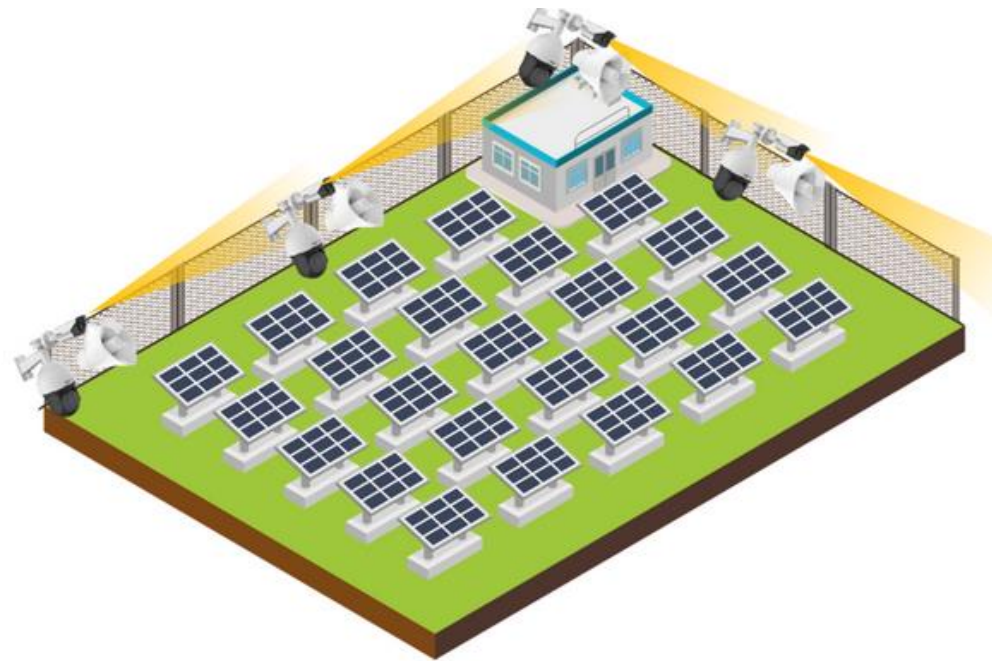



Application: Solar Panel




Product Model	Picture	Description	Mark
DS-2TX3636-15A-V1 DS-2TX3636-25A-V1 DS-2TX3636-35A-V1		Thermal: 384 × 288; Lens: 15/25/35mm False alarm reduction technology Master slave tracking system	Max VCA detection distance: 150m/250m/350m
DS-3E0109P-E(C)		8 PoE ports switch	
DS-D5022FN		22" monitor, VGA/HDMI input	
DS-7732NI-I4		32 IP channels NVR. alarm I/O: 16/4 Up to 16-ch @ 1080p decoding capacity	





Application: Villa

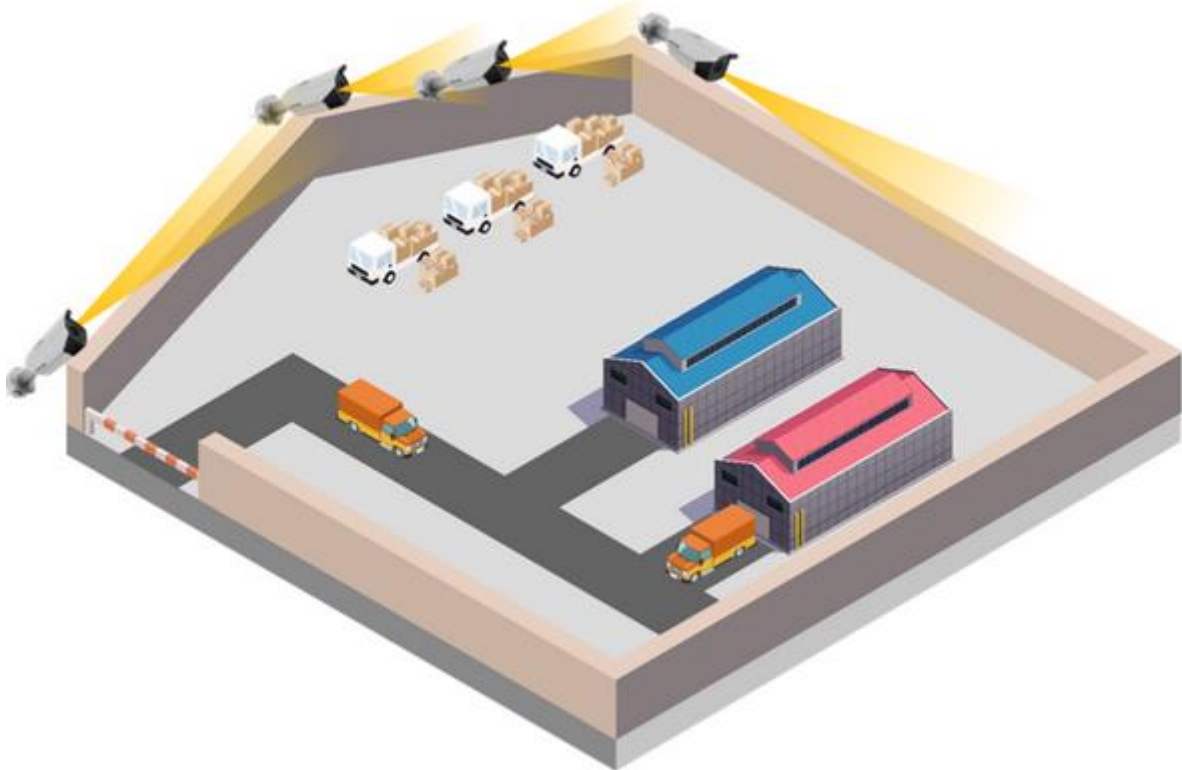


Product Model	Picture	Description
DS-2CD5A46G0-IZS		2560 × 1440 @ 30fps Darkfighter technology IP67, IK10; Alarm 2 inputs/2 outputs
DS-3E0109P-E(C)		8 PoE ports switch
DS-D5022FN		22" monitor, VGA/HDMI input
iDS-9632NXI-I8/16S(B)		16-ch false alarm reduction Human/vehicle classification






Application: Warehouse

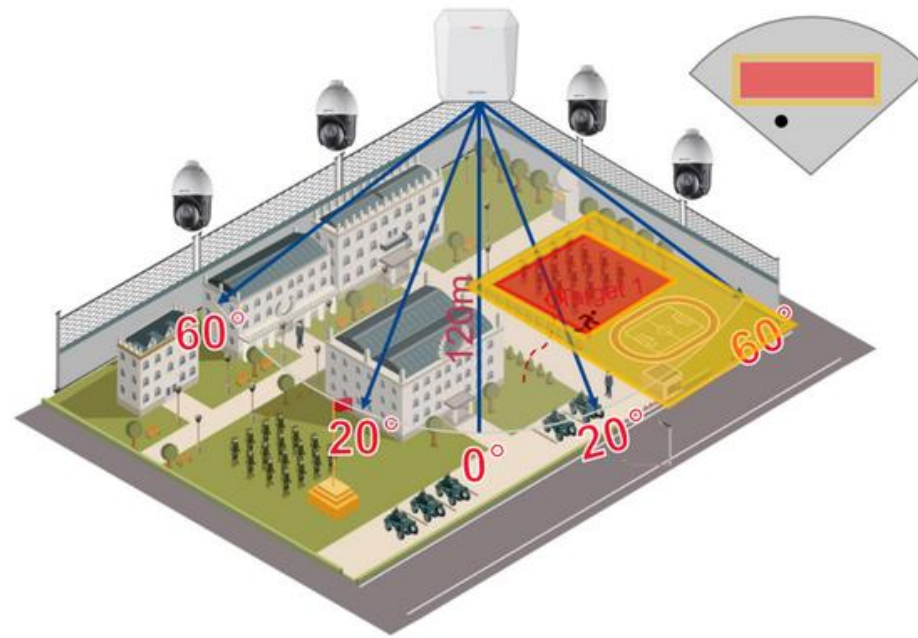

Product Model	Picture	Description	Mark
DS-2TD2137-15-V1 DS-2TD2137-25-V1 DS-2TD2137-35-V1		Thermal: 384 × 288; Lens: 15/25/35mm False alarm reduction	Max VCA detection distance: 150m/250m/350m
DS-3E0109P-E(C)		8 PoE ports switch	
DS-D5022FN		22" monitor, VGA/HDMI input	
DS-7732NI-I4/16P		32 IP channels NVR. alarm I/O: 16/4 Up to 16-ch @ 1080p decoding capacity	






Application: Military Camps



Product Model	Picture	Description	Mark
DS-PRI-120		Detection angle: 120° Detection range: 120m Line crossing(Max. 4 trigger lines) and Zone alarm(Max. 16 Zones)	Max VCA detection distance: 150m/250m/350m
DS-2DF8436IX-AEL(W) (C)		8-inch 4MP 36X DarkFighter IR Network Speed Dome	
DS-3E0109P-E(C)		8 PoE ports switch	
DS-D5022FN		22" monitor, VGA/HDMI input	
DS-7732NI-I4		32 IP channels NVR. alarm I/O: 16/4 Up to 16-ch @ 1080p decoding capacity	

Application: Military Camps



Product Model	Picture	Description
DS-2CD5A46G0-IZS		2560 × 1440 @ 30fps Darkfighter technology IP67, IK10; Alarm 2 inputs/2 outputs
DS-3WF02C-5N/O		2.4Ghz 150Mbps 3km Outdoor Wireless CPE
DS-3E0109P-E(C)		8 PoE ports switch
DS-D5022FN		22" monitor, VGA/HDMI input
iDS-6716NXI-I/16S(B)		16-ch false alarm reduction Human/vehicle classification 12 VDV power supply