



HIKVISION'S 4K ULTRA HD CAMERA LINEUP

A Range of Models for Outstanding Images
to Help You See More Details

HIKVISION

HIKVISION'S 4K ULTRA HIGH DEFINITION (UHD)



Until now, limited resolution often hindered the accuracy of video analytics by missing critical image details. Today Hikvision's 4K camera systems provide users with incredibly clear images with enhanced video quality and every detail, facilitating better video content analytics and use of video data.


Hikvision's H.265+ video compression technology offers three additional enhancements: predictive encoding, noise suppression, and flexible bitrate control. Using H.265+ video compression technology with our 4K systems enables a reduction in bandwidth usage and storage costs while delivering efficient UHD video footage.



Hikvision 4K NVR
with 4K Display

4K Resolution

4K resolution refers to a horizontal display resolution of around 4,000 pixels (about 8 MP). 4K offers up to four times higher resolution than standard HDTV 1080p. 4K is the TV industry norm and becoming a new standard for video-based security systems with better image quality and richer detail.

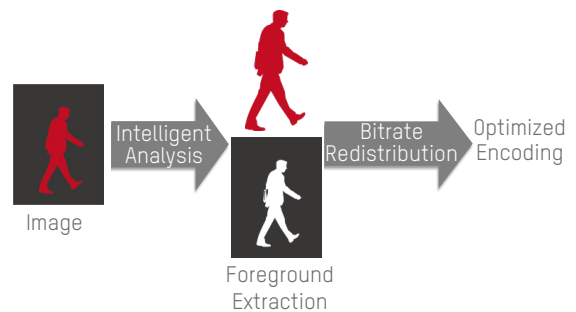

Hikvision H265+
Smart Codec

1080P vs 4K



2 MP

3 MP



5 MP

8 MP



2 MP

573

5 MP

573

4K

573

APPLICATIONS


Hikvision 4K systems vastly improve applications in various scenarios such as parking lots, stadiums, intersections, and other broad monitoring areas where clear, high-resolution images and intelligent surveillance are needed.



Parking lots



Stadiums

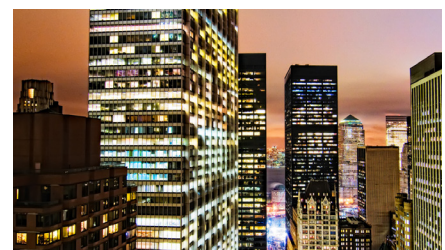

Demanding Environments or Areas

4K PRODUCT SHOWCASE

Hikvision leads the industry, offering a complete portfolio of 4K network cameras and network PTZs to implement 4K technology in varied applications. Partners have a wide range of 4K products to select from to meet each unique project requirement.



DS-2CD2087G2-L 2.8mm
DS-2CD2087G2-L 4mm
8 MP Fixed Bullet Network
Camera with ColorVu



- 0.0005 lux @ f1.0
- 2.8 or 4 mm fixed lens
- Colorful Imaging 24/7
- Human/Vehicle Classification
- H.265+/H.265
- IP67
- 130 dB WDR



DS-2CD2387G2-LU 2.8mm
DS-2CD2387G2-LU 4mm
8 MP Fixed Turret Network
Camera with ColorVu,
Built-in Mic



- 0.0005 lux @ f1.0
- 2.8 or 4 mm fixed lens
- Colorful Imaging 24/7
- Human/Vehicle Classification
- H.265+/H.265
- IP67
- 130 dB WDR
- -U: Built-In Microphone



PCI-D18F2S
PCI-D18F4S
PCI-D18F6S
8 MP Fixed Dome
Network Camera with
2nd Gen AcuSense



- 0.003 lux @ f1.6
- 2.8, 4 or 6 mm fixed lens
- Human/Vehicle Classification
- H.265+/H.265
- IP67
- 120 dB WDR
- Up to 131 ft IR



PCI-B18F2S
PCI-B18F4S
PCI-B18F6S
8 MP Bullet Network
Camera with
2nd Gen AcuSense



- 0.003 lux @ f1.6
- 2.8, 4 or 6 mm fixed lens
- Human/Vehicle Classification
- H.265+/H.265
- IP67
- 120 DB WDR
- Up to 131 ft IR



PCI-D18Z2S
8 MP Varifocal Dome
Network Camera with
2nd Gen AcuSense



- 0.003 lux @ f1.6
- 2.7 to 13.5 mm motorized VF lens
- Human/Vehicle Classification
- H.265+/H.265
- IP67
- 120 dB WDR
- Up to 131 ft IR



PCI-T18Z2S
8 MP Varifocal Turret
Network Camera with
2nd Gen AcuSense



- 0.0035 lux @ f1.6
- 2.7 mm to 13.5 mm motorized VF lens
- Human/Vehicle Classification
- H.265+/H.265
- IP67
- 120 dB WDR
- Up to 131 ft IR



DS-2CD2083G0-I 2.8mm
DS-2CD2083G0-I 4mm
8 MP Fixed Bullet Network Camera, Value IP

Value IP

- 0.028 lux @ f2.0
- 2.8 or 4 mm fixed lens
- H.265+/H.265
- IP67
- 120 dB WDR
- Up to 100ft IR



DS-2CD2183G0-I 2.8mm
DS-2CD2183G0-I 4mm
8 MP Fixed Dome Network Camera, Value IP

Value IP

- 0.028 lux @ f2.0
- 2.8 or 4 mm fixed lens
- H.265+/H.265
- IP67
- 120 dB WDR
- Up to 100 ft IR



DS-2CD2783G1-IZS
8 MP Varifocal Dome Network Camera, Value IP

Value IP

- 0.0005 lux @ f1.0
- 2.8 to 12 mm Motorized Varifocal Lens
- H.265+/H.265
- IP67
- Up to 100 ft IR
- 120 dB WDR



DS-2CD2683G1-IZS
8 MP Varifocal Bullet Network Camera, Value IP

Value IP

- 0.028 lux @ f2.0
- 2.8 to 12 mm Motorized Varifocal Lens
- H.265+/H.265
- IP67
- 120 dB WDR
- Up to 165 ft IR



DS-2DE7A825IW-AEB
8 MP 25× IR Network Speed Dome with 2nd Gen AcuSense

AcuSense

- 0.005 Lux @ f1.5
- 5.9 to 147.5 mm Motorized Varifocal Lens
- Human/Vehicle Classification
- H.265+/H.265
- Up to 656 ft. IR
- 120 dB WDR
- 25× optical zoom and 16× digital zoom
- Audio & Strobe Light Alarm

Hikvision USA Inc.
18639 Railroad Street
City of Industry, CA 91748

Hikvision Canada Inc.
4848 Levy Street
Saint-Laurent, Quebec H4R 2P1

Contact Information
Toll-Free: +1 866-200-6690 (U.S. and Canada)
Phone: +1 909-895-0400
Email: sales.usa@hikvision.com
hikvision.com

Connect with us: [!\[\]\(eafc244b53721dd1ec133f0772f70fc7_img.jpg\)](#) [!\[\]\(cb741e910ae1fce3b15fcd4605753ff5_img.jpg\)](#) [!\[\]\(7db78e01f48713b9a2242a4e52c8494a_img.jpg\)](#) [!\[\]\(fac5b4ae95a83ca5438f440b384c5905_img.jpg\)](#) [!\[\]\(a93ebadef8f96389d8858fdf1c78064a_img.jpg\)](#)

©2021 Hikvision USA Inc. and Hikvision Canada Inc. All rights reserved. Hikvision is a registered trademark of Hikvision Digital Technology Co., Ltd. in the US, Canada and other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Product specifications and availability are subject to change without Notice.