

DS-TRC900-8/A
UHF Sticker



- Peel-and-stick installation for quick and easy deployment
- 50-year data retention guaranteed
- Compliant with ISO/IEC 18000-63 and EPC Gen2 V2 standards
- Long read range with high stability performance


▪ Specification

UHF	
Working Frequency	918.4 MHz - 923 MHz
RF Protocol	ISO/IEC 18000-6C(63.EPC C1 GEN2)
Reading Distance	12 m (depending on the power of the reading device and the size of the antenna of the reading device)
IC Chip Type	ImpinjM730
Memory Capacity	EPC: 128 Bits; TID: 96 Bits; Password: 64Bits; User: /
Data Life	50 year
Number of Use/Storage Life	100,000 times
Antenna Material/Base Material	PET(50μm)
General	
Working Environment	-20°C to +50°C, 20% to 80%RH
Dimensions	100 × 25 × 1 mm (3.94 × 0.98 × 0.04 inch)
Storage Temperature and Humidity	1 year at 23±5°C / 50%±10%RH), sealed in the vacuum bag and avoid direct sunlight exposure

▪ Available Model

DS-TRC900-8/A

▪ Dimension

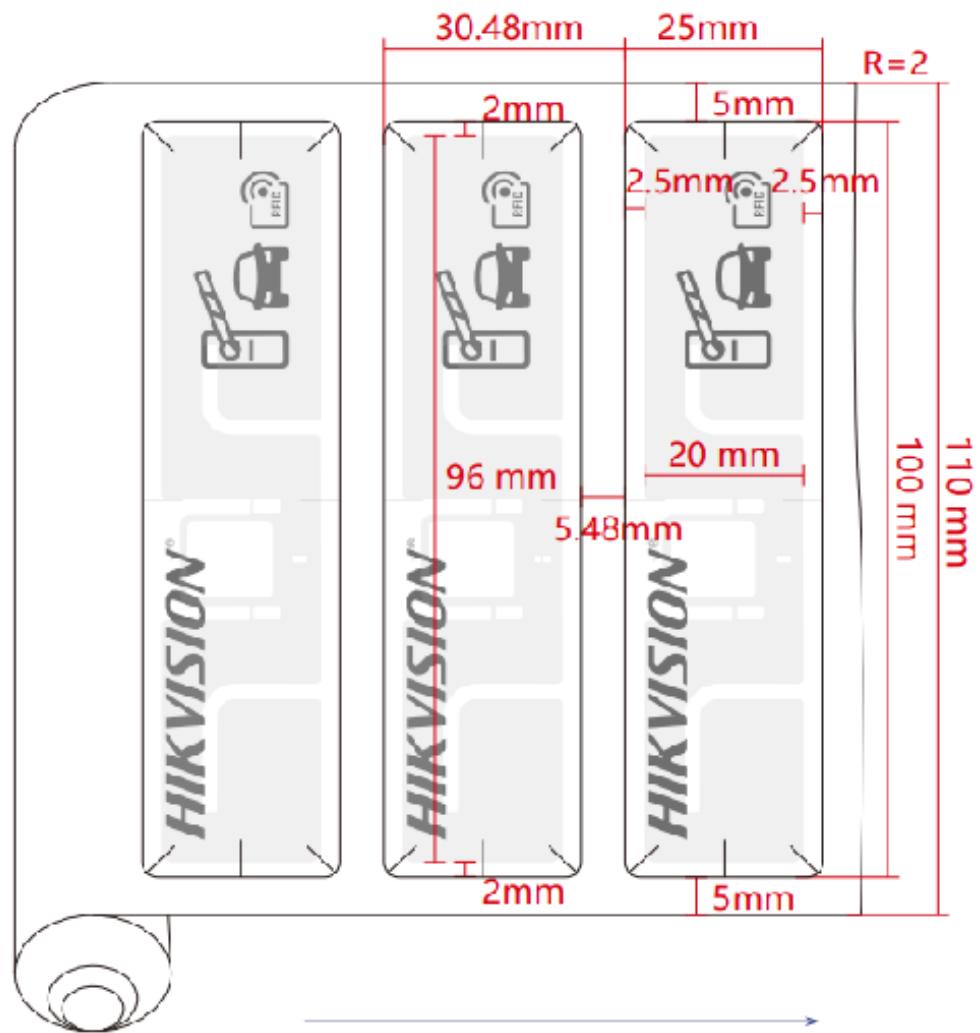

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®