


DS-XPUK06-Y/KYL

Power Distribution Unit (PDU)

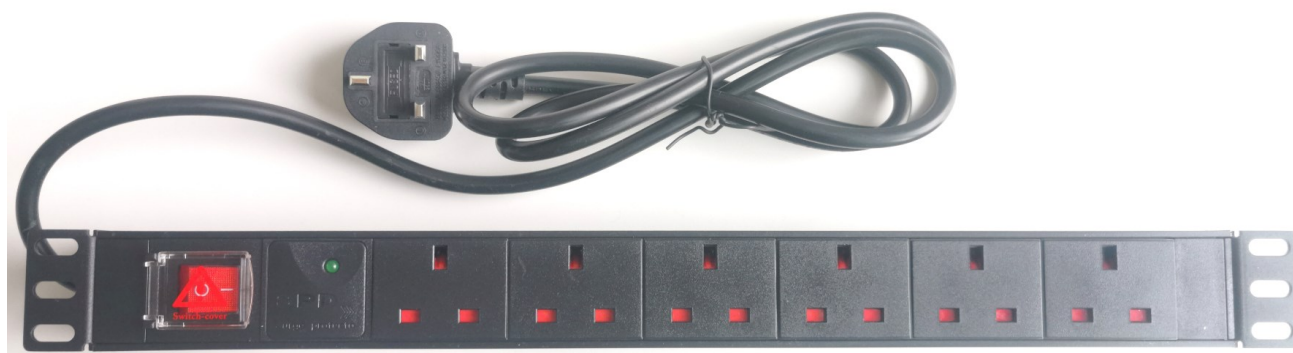

Key Feature

- Double-Break Switch with Indicator Light
- Common Surge Protector Module

Specification

Model	DS-XPUK06-Y/KYL
Socket Standard	6-Unit PDU Socket
Protection and Control Module	Double-Break Switch with Indicator Light (× 1) Common Surge Protector Module (× 1)
Internal Connection Method	Internal Wiring (Rate: 13A/250V)
Accessories	4 Sets of M6 × 12 mm Phillips Screws and M6 Floating Nuts PDU Installation Manual
Power Cord	1.5m, 3 × 1.5 mm ² power input cable with BS1363 plug
Hanger Mounting Angle	Hanger (Angle: 0°/Horizontal, Thickness: 25 mm)
Distance Between Mounting Holes	462±5mm
Dimension	485 mm × 44.5 mm × 44.5 mm
Shell material	1U Aluminum Alloy, Black

Available Model

DS-XPUK06-Y/KYL

Dimension

