



**How to setup an accurate perimeter guarding system
with AcuSense DVR**

HIKVISION TECHNICAL SUPPORT TEAM

05-23-2018

How to setup an accurate perimeter guarding system with AcuSense DVR

This quick guide shows you how to set up an accurate perimeter guarding system with Turbo AcuSense DVR.

All operations in the quick guide are based on GUI 4.0.

1. Basic introduction


In traditional surveillance system, all moving objects could trigger the perimeter guarding alarm, in which a large amount of false alarms are included.

Turbo AcuSense DVR is the new AI DVR with HIKVISION deep learning algorithm which could filter false alarms triggered by irrelevant targets, such as animals and leaves, to improve detection accuracy considerably.


Turbo AcuSense DVR supports filtering false alarm for 2 events: line crossing and intrusion detection.

Note:

The aim of the system is to reduce false alarm rate, and up to 90% of the false alarm can be filtered.

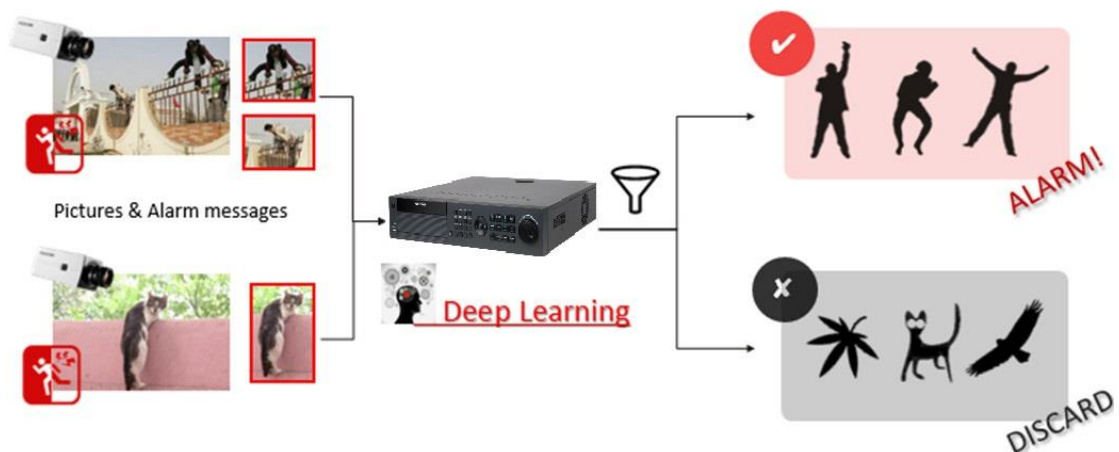

2. Basic Application Topology

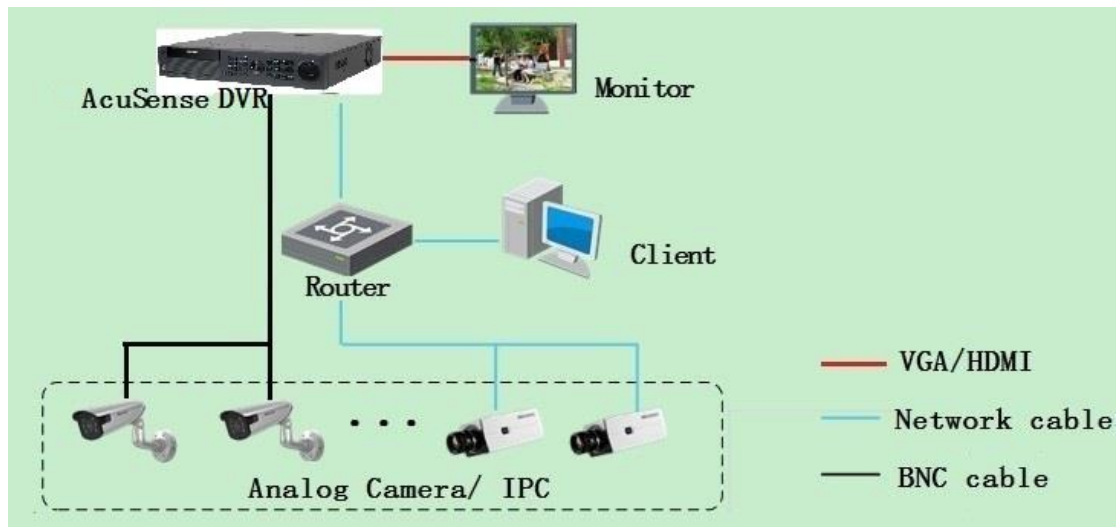

Note:

- 72xx series AcuSense DVR supports false alarm filtering for only analog channels;
- 73xx/90xx supports false alarm filtering for both analog & IP channels.


3. False Alarm Filter Configuration

- 1) Go to DVR local GUI → **System** → **Event** → **Smart Event**;
- 2) Choose and enable the event you want to detect (line crossing or region intrusion);
- 3) Check the target of interest.
- 4) If you tick '**Enable Smart Analysis**', DVR will detect event with smart algorithm and no camera smart detection function will be needed. Which is to say, DVR is able to detect smart event even if the camera doesn't support these functions;

You can choose between 3 modes: **Human**, **Vehicle** or **Human& Vehicle**.


Once the target detection is enabled, DVR will filter most of the false alarms based on the deep learning algorithm automatically.

This detection mode has a higher accuracy and is recommended when there are massive false alarms from front cameras.

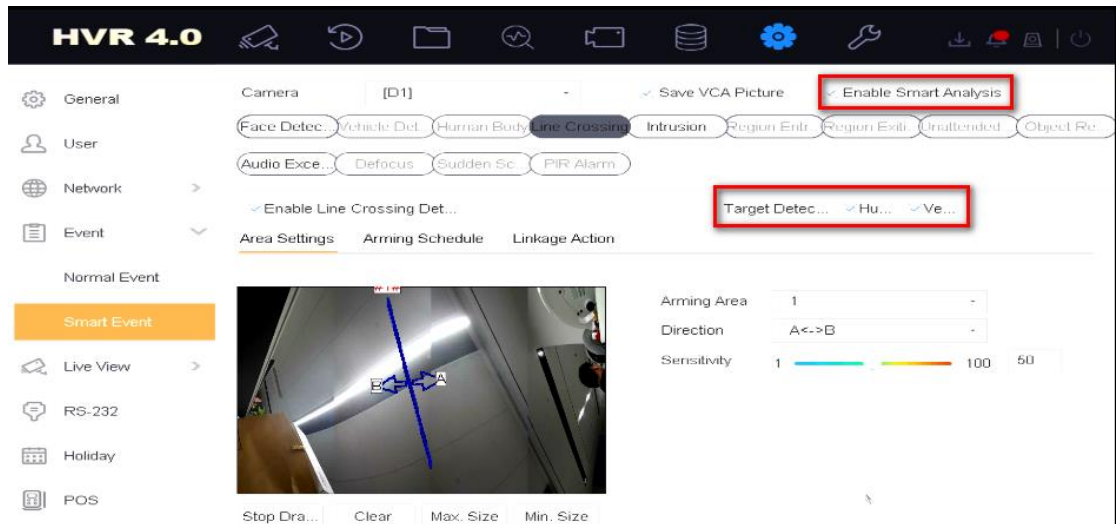

Note:

- Turbo AcuSense DVR only supports Line crossing and Region Intrusion Detection in smart analysis mode at present;
- If you want to search the filtered false alarms, please go to **File Management** —>**Event Type**—>**False Alarm** to search.

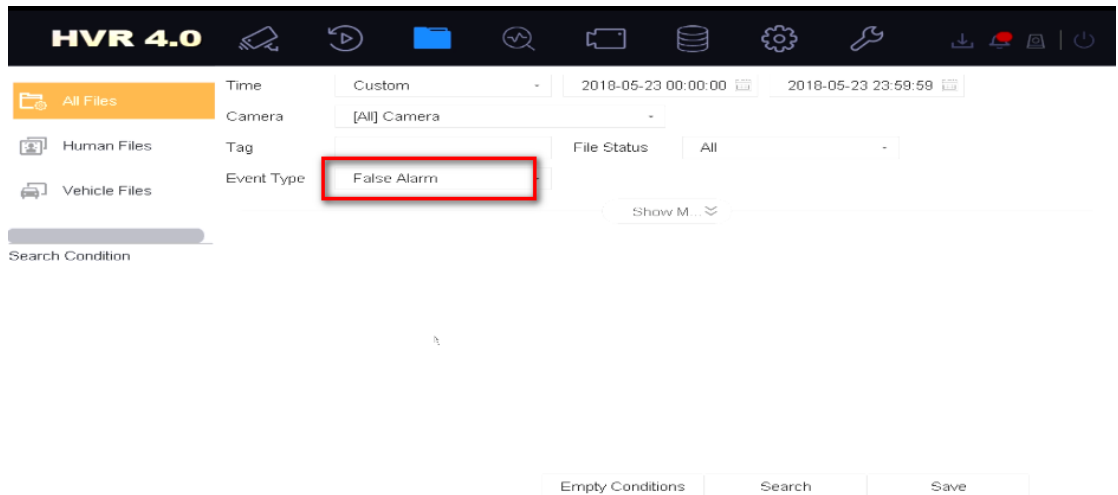


4. Installation Specification & Rule

In order to make the whole system more accurate, there're some mounting and rule requirements for cameras.

In this chapter, we take several typical scenarios as examples to help you setup a better perimeter system.

(1) Camera installation

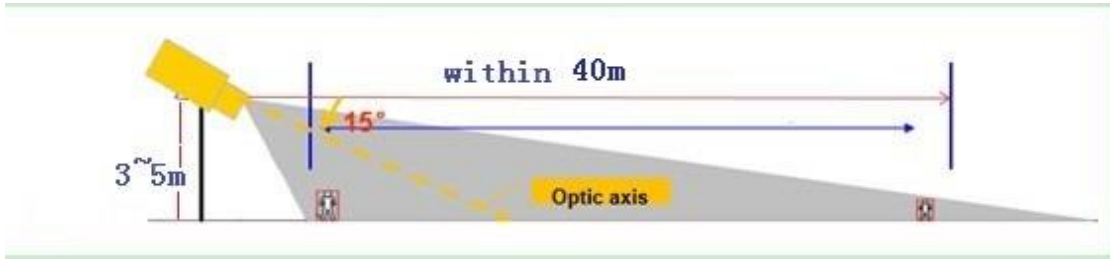

- Camera is recommended to be installed 3-5 meters high. If there is fence, the installation height must be higher than the fence.
- Angle between the optic axis and the horizontal line should be larger than 15°.
- The monitoring distance is recommended to be within 40 meters.

(2) Rule size

The detection area should be larger than 1/4 of the image, which means the vertical rule line should longer than 1/4 of the image vertical size while the horizontal rule line should longer than 1/4 of the image horizontal size.

(3) Target size

It's recommended to install camera at a proper distance from detected target in order to have a better performance. For example, the target in the picture below is too large to detect, the man almost covers the whole scene. It's better to adjust the angle higher so that the camera can start detecting from a longer distance.



(4) Influence factors

1) Illumination



It's easy to deduce that once the scene is too dark, camera or DVR can't detect target precisely. Lighting supplement or low light cameras is recommended in scene below.



2) Obstacle


Obstacles might block the target you are really interested in. Scene in picture below is not an appropriate one for detecting.



3) Strong light

In some scenarios, strong light interference makes a target hard to be detected. Strong light generally can be divided into two kinds: **strong background light** and **strong foreground light**.

Strong background light makes foreground target totally dark, as what is shown picture below, the man in corridor looks like a shadow. WDR or BLC function is recommended in this scene.

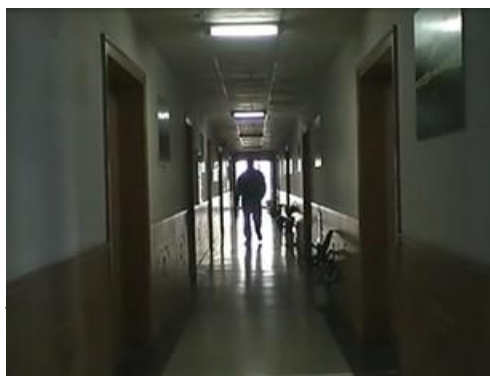

Strong foreground light is usually generated by sudden light intensity change such as car light, flash light, sunshine reflection. We suggest customer change Camera's angle to avoid strong light or use cameras with HLC function.

4) Complex scene

We suggest customer use perimeter guarding alarm to detect human who is not supposed to enter a region or cross a line, **so it's not applicable in a scenario such as train station with large people flow.**


The scene below has too many people and a vast number of alarms will be created, it's not a recommended scene for false alarm detection.



5) Detection rule

In addition to installation guide, appropriate rule is also a critical part in perimeter guarding system.

Here's an example, customer wants to detect man who walks across the door on the left side. However, the rule is too near to the edge. Once a man appears in the scene, there's no enough time for DVR or Camera to detect. We highly recommended customer set detection rule in the center of the scene, or not near the scene's edge.

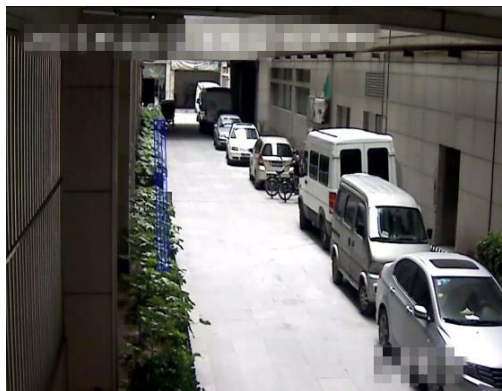

6) Rule position

Although AcuSense DVR is able to filter false alarms created by leaves, animals etc., it is highly recommended to set rule in a **static** field/environment. One customer sets line crossing rule on grass in a scene below, grass continuously makes false alarms which occupy DVR smart resource and storage space.



7) Focal length

If the focal length is too small, the target will be too small to detect as shown in the following figure, which may cause missed detection. So we need to select the proper focal length to avoid missed detection according to the scene.



(5) Standard scenario






(6) Camera selection

If customer wants to use smart detection in an indoor environment, **camera with WDR and wide FOV is recommended.**

In some outdoor scenarios, bullet camera is a better choice than dome camera. Some raindrops might be stuck to the surface of dome camera, with raindrops accumulated, it decreases accuracy of smart detection.

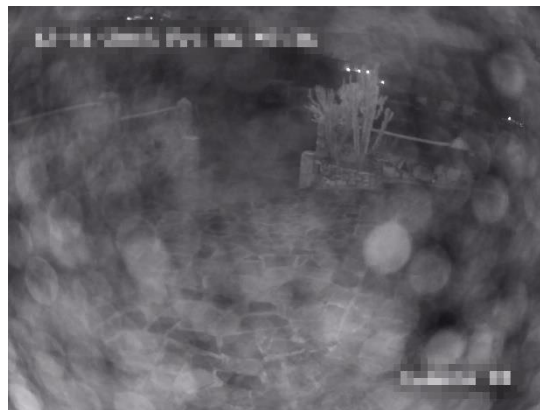

First Choice for Security Professionals
Hikvision Technical Support

