

SL-1211-2 Supplement Light




SL-1211-2 light is a supplement light by gas discharge, which supplements light simultaneously with capturing picture, controlled by high-definition intelligent cameras.

Key features including:

- Short response time suitable for over speed capture
- High peak power effectively enhance the quality of face capturing picture
- Support brightness level switching and remote control via IO interfaces
- Support TTL level trigger manner (switch trigger optional)
- The novelty design, such as adopt manual universal joints, make it easy for adjustment
- Adopt optical grating, reducing light pollution effectively



Dimensions

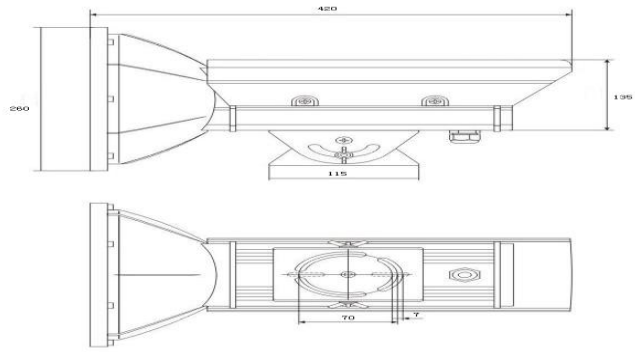

Specification

Supplement Light	
Power Supply	AC220V \pm 10%/48Hz \sim 52Hz; AC110V \pm 10%/48Hz \sim 52Hz
Color Temperature	5500K \pm 500K
Flash Energy	75J
Consumption (W)	Average <100W (@ 1 flash / s), the instantaneous maximum <300W
Trigger Manner	TTL level(switch trigger optional)
Optical Grating	Support (Reducing light pollution effectively)
Operating Temperature	-25 \sim + 70 $^{\circ}$ C (safe to use with attenuation no less than -40 $^{\circ}$ C)
Operating Humidity	10% \sim 90%@40 $^{\circ}$ C ,no condensation
Coverage	Single lane
Application Condition	Traffic camera and speeding capture camera
Pulse and Protection	Shielded \geq 3Hz continuous pulse signal (after 15 times flash enter micro-flash prompt state at 1 / S, recovery time is 10S)
Service Life	\geq 20 million times
Weather proof rating	IP65
Dimension	260mm(W) \times 260mm(H) \times 420mm(D)
Weight	3.5Kg

Order Model:

SL-1211-2